



PRODUCTS CATALOG

TAYFUR WATER SYSTEMS

TYPHOON®

We **Care** About
Every Drop of
Water



Tayfur Water Systems, which was established by Tayfun Yazaroğlu in 2004 in Izmir. We continue our activities as "Tayfur Water Systems Machinery Engineering Industry and Trade Inc." since 2017.

Our company offers its products and experiences to the local market and international market. Tayfur Water Systems, while strengthening its recognition abroad, continues to expand its production, sales and marketing activities every day.

Our engineers and technical staff, technological infrastructure, manufacturing, sales, project-consulting, contracting and service planning meets the requirements of the sector.

Our company manufactures "TYPHOON" brand, hydraulic control valves, plastic hydraulic control valves, backwash valves, plastic backwash valves, impact-free dynamic suction cups, plastic suction cups, bottom clamps, filter reverse flushing control devices. It is progressing towards becoming a strong brand in both domestic and foreign markets by meeting the special demands of its domestic and foreign customers.

STORY OF US

Our Quality Policy

In order to be a leader in quality in the sales, marketing and service sector by complying with legal conditions and to comply with the requirements of Quality Management System in order to meet the needs and expectations of our customers, to continuously improve the efficiency and to not compromise the quality under any circumstances.

Our Mission

To be a company aiming to present its synergy in the national and international market which has always taken its responsibilities, desires and expectations of our customers in a correct, reliable and timely manner, within the framework of high quality standards, transforming efficiency and competition into an advantage...

Our Vision

To be a leading, innovative, powerful and reputable enterprise in its sector.



HYDRAULIC CONTROL VALVES

Agricultural

Typhoon hydraulic control valves are automatic valves with direct diaphragm shut-off working with line pressure. It is a comfortable, smooth flow in the minimum pressure loss of the body and diaphragm, which is kept in the foreground in its design.

In hydraulic control valves, worn parts such as shafts, bearings and bushings are longevity. The single moving part of valves is the diaphragm.

TYPHOON hydraulic control valves, in-line drinking water pump, agricultural irrigation, fire systems, filtration, industrial, etc. designed for use in areas.


- M** Manually Controlled Valve
- PR** Pressure Reducing Control Valve
- PRPS** Pressure Reducing + Pressure Sustaining Control Valve
- PS** Pressure Sustaining Control Valve
- PREL** Pressure Reducing + Solenoid Controlled Valve
- EL** Solenoid Controlled Valve
- QR** Quick Relief Control Valve

- FL** Float Level Control Valve
- FLEL** Electric Float Level Control Valve
- DIFL** Differential Float Level Control Valve
- PC** Pump (Booster) Control Valve
- DPC** Deep Well (Submersible) Pump Control Valve
- SA** Surge Anticipating Control Valve
- HD** Hydraulic Check Valve




Working Principles

They are automatic control valves which are used hydraulically to perform the desired operations with line pressure without the need of energy sources in the mains line.




Valve Closing Mode

When the pilot discharge position on the main control valve in the closed position is reached, the pressurized water on the diaphragm of the main control valve is drained. When the line pressure reaches the position of spring force, hydraulic force is applied to the diaphragm of the control valve under water, so that the valve is in full open position.



Valve Opening Mode


When the pilots on the main control valve reach the water pressure diaphragm, the water creates a hydraulic force. The resulting hydraulic force combines the diaphragm with the force applied by the spring to create a complete seal and close.





Modulation Mode

These are the pilot valves which are connected to the control valve which allows the main valve to operate in this position. According to the amount of flow and pressure to be adjusted, the water pressure on the diaphragm is controlled constantly, allowing it to operate in a modulated position.

Models

Flanged		Connection		Material		Body		Transmition Pressure			
		Flanged		GGG40		Globe		PN10 - PN16 - PN25			
		Available Diameters									
		mm	50	65	80	100	125	150	200	250	300
		inch	2	2 ^{1/2}	3	4	5	6	8	10	12



Threaded		Connection		Material		Body		Transmition Pressure		
		Threaded		GGG40		Globe		PN10 - PN16 - PN25		
		Available Diameters								
		mm	20	25	32	40	50	65	80	
		inch	3/4	1	1¼	1½	2	2½	3	

Victaulic		Connection		Material		Body		Transmission Pressure	
		Victaulic		GGG40		Globe		PN10 - PN16 - PN25	
		Available Diameters							
		mm	50	65	80	100	150	200	
		inch	2	2 1/2	3	4	6	8	



Angled		Connection		Material		Body		Transmition Pressure	
		Flanged / Threaded		GGG40		Globe		PN10 - PN16 - PN25	
		Available Diameters							
		mm	50	80	100	150			
		inch	2	3	4	6			

Sizes and Weights


Flanged	DN		D		L		H		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
	2	50	6,50	165	8,66	220	5,87	149	17,60	8,00
	2 ^{1/2}	65	7,28	185	8,66	220	6,06	154	21,60	9,80
	3	80	7,87	200	11,26	286	6,81	173	38,80	17,46
	4	100	8,66	220	12,99	330	6,81	173	46,47	29,08
	5	125	9,84	250	14,49	368	8,35	212	62,30	28,25
	6	150	11,22	285	15,51	394	12,80	325	114,40	51,90
	8	200	13,38	340	18,19	462	14,96	380	200,80	91,10
	10	250	15,94	405	21,46	545	19,09	458	332,90	151,00
	12	300	18,11	460	22,19	582	19,69	500	392,90	178,20



Threaded	DN		D		L		H		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
	3/4	20	0,90	23,0	5,2	132	2,0	50,0	2,2	1,00
	1	25	0,90	23,0	5,2	132	2,0	50,0	2,2	1,00
	1 ^{1/4}	32	1,35	34,0	6,8	173	3,6	92,3	6,3	2,85
	1 ^{1/2}	40	1,35	34,0	6,8	173	3,6	92,3	5,8	2,65
	2	50	1,65	41,5	7,3	186	4,4	112,0	9,0	4,10
	2 ^{1/2}	65	1,80	46,0	8,9	226	4,6	118,0	11,7	5,30
	3	80	2,05	52,5	12,5	318	5,0	127,0	26,4	12,00







Angled	DN		D		L		H		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
Threaded	2	50	4,4	112	6,05	154	6,05	154	9,47	4,3
	3	80	7,1	180	9,45	240	9,45	240	29,30	13,3
Flanged	2	50	4,40	112	7,44	189	7,44	189	19,07	8,65
	3	80	7,10	180	10,95	278	10,95	278	39,02	17,7
	4	100	7,48	190	12,00	305	12	305	60,19	27,3
	6	150	9,05	230	14,92	379	14,92	379	106,26	48,2

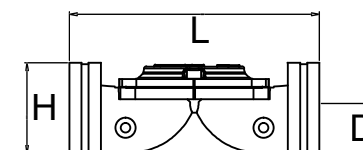

Victaulic	DN		D		L		H		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
	2	50	1,18	30	7,24	190	3,11	79,0	8,60	3,9
	2 ^{1/2}	65	1,46	37	8,90	218	3,74	95,0	9,92	4,5
	3	80	1,77	45	11,42	290	3,70	94,0	13,00	5,9
	4	100	2,26	57,5	12,48	317	4,19	106,5	13,6	6,2
	6	150	3,30	84	17,87	392	5,24	133,0	66,00	30
	8	200	4,53	115	21,40	544	13,10	332,0	143,30	65

Flanged

Nr.	Material Name	Type Of Material
1	Body	GGG40
2	Diaphragm	Natural Rubber
3	Spring Seat	Polyamide
4	Spring	SST 302
5	Cover	GGG40
6	Washer	8.8 Coated Steel
7	Bolt	8.8 Coated Steel
8	Lifting Eyebolts	8.8 Coated Steel
9	Nut	8.8 Coated Steel

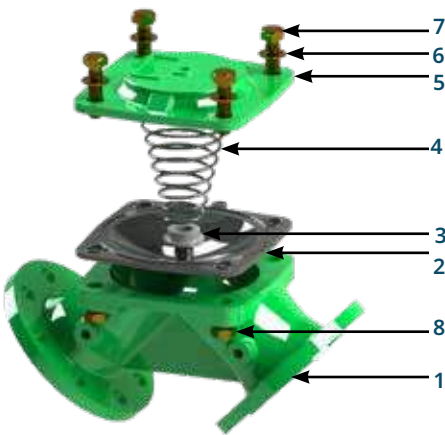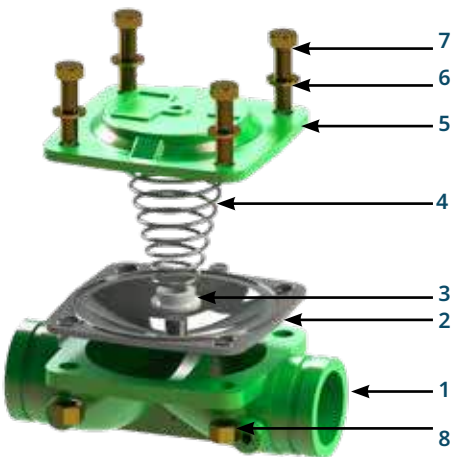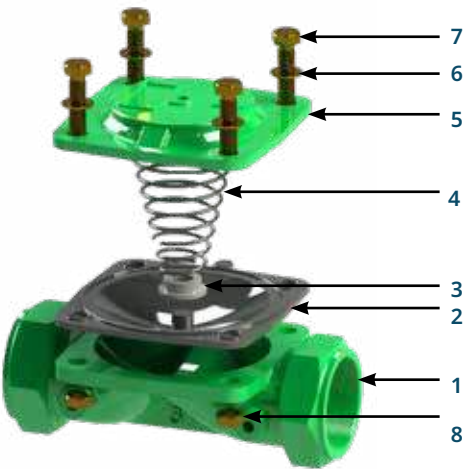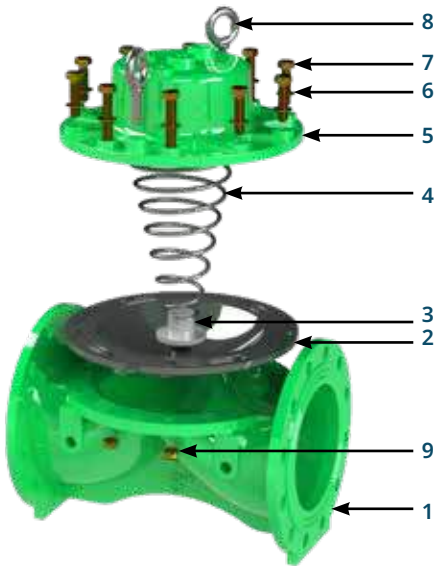


Threaded - Victaulic - Angled

Nr.	Material Name	Type Of Material
1	Body	GGG40
2	Diaphragm	Natural Rubber
3	Spring Seat	Polyamide
4	Spring	SST 302
5	Cover	GGG40
6	Washer	8.8 Coated Steel
7	Bolt	8.8 Coated Steel
8	Nut	8.8 Coated Steel


Technical Specifications

Operating Pressure	Standard	0,7 - 16 bar (10 - 240 psi)
	Low Pressure Range	0,5 - 10 bar (7,5 - 160 psi)
	High Pressure Range	0,7 - 25 bar (10 - 360 psi)
Temperature	Minimum Operating Temp.	- 10 °C (14 °F) DIN 2401/2
	Maximum Operating Temp.	80 °C (176 °F) DIN 2401/2
Connection	Flanged	DIN 2501, ISO 7005 - 2
	Threaded	ISO (BSP) , ANSI (NPT)
Covering	Standard	Epoxy
	Optional	Polyester
Hydraulic Connections	Standard	Reinforced Nylon (Air Brake) Hydraulic Tube SAE J 844
	Optional	Copper DIN1057
Actuator Type	With Single Control Chamber	Aperture With Diaphragm

Pressure Loss Chart

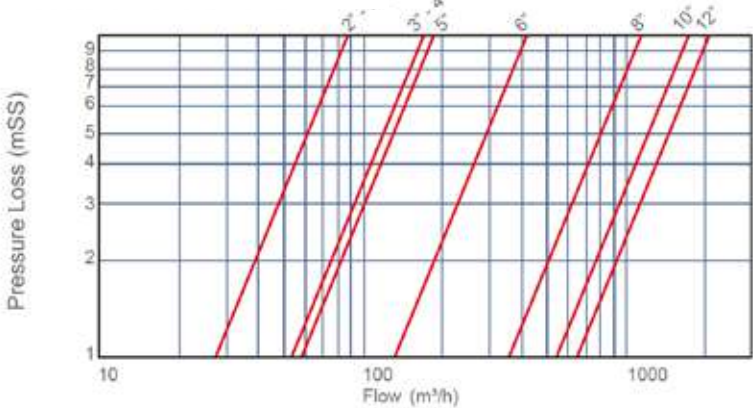

Cavitation Chart

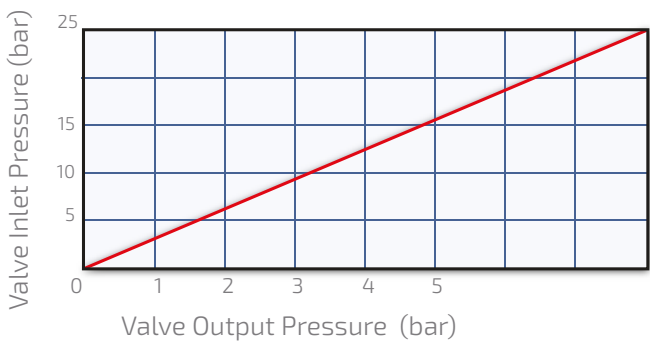

Hydraulic Performance

	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
Valve Diameter	2	50	2 1/2	65	3	80	4	100	5	125	6	150	8	200	10	250	12	300
Kv m3/h @ 1bar	88		88		174		187		187		419		1139		1698		2276	
Cv gmp @ 1psi	102		102		201		216		216		484		1316		1961		2629	

$Kv(Cv) = Q \cdot \sqrt{G/\Delta P}$

Kv : Valve flow coefficient (flow rate at 1 bar pressure loss m³/h @ 1 bar)


Cv : Valve flow coefficient (flow in pressure loss of 1 psi GPM @ 1 psi)

Q : Flow (m³/h, gpm)

Cv = 1,155Kv

ΔP : Pressure Loss (bar, psi)

G : The specific gravity of water(Water=1.0)

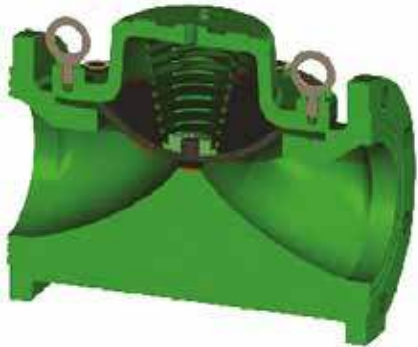

MANUALLY CONTROLLED VALVES


Agricultural

Manually Controlled Valves are hydraulic control valves which are operated by line pressure and provide 3-way mini valves for on-off operation. The valve has a minimum opening pressure of 0.7 bar. Thanks to its flexible diaphragm, it performs an easy and quick check operation in high pressure applications and is shut off without impact.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type

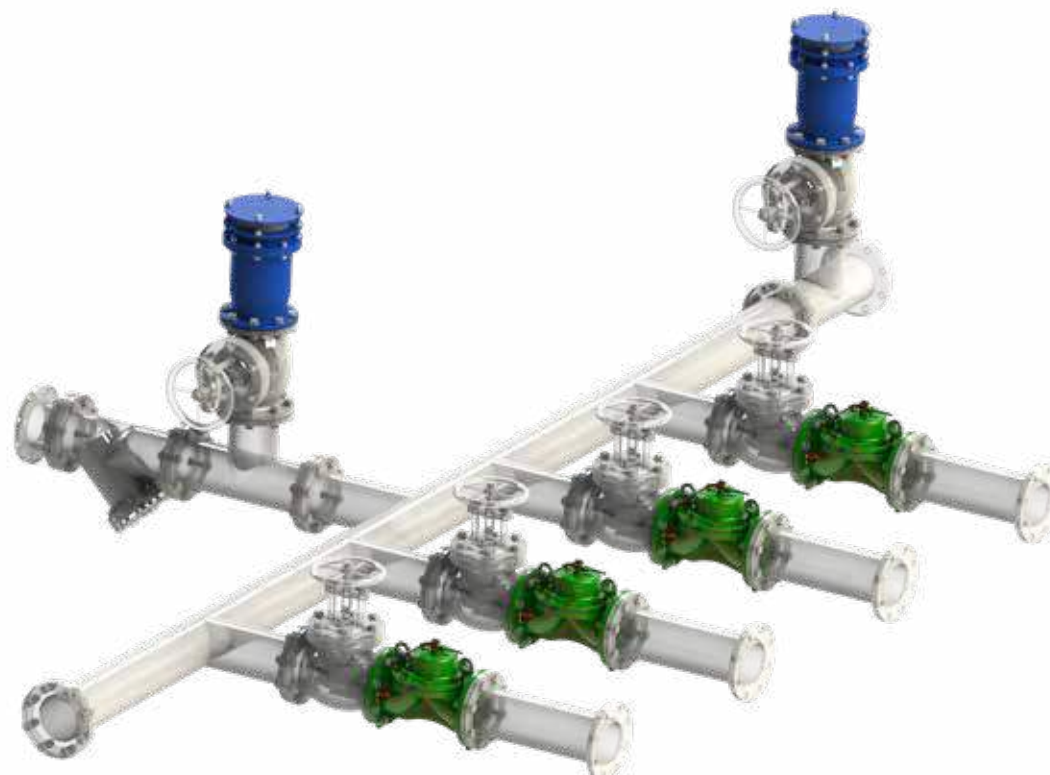

Agricultural

Pressure Reducing Control Valves are hydraulic control valves that reduce the input pressure value to the desired pressure value by means of a pressure reducer pilot mounted on it. The pressure reducer control valve constantly controls the output pressure value to be set without being influenced by the flow rate and inlet pressure values. When there is no flow in the system, the valve closes itself. When the valve inlet pressure value in the system falls below the set outlet pressure value, the valve opens itself. The valve can be used in horizontal or vertical position on the system.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure..... bar
Desired outlet pressure value..... bar

PRESSURE REDUCING CONTROL VALVE



SOLENOID CONTROLLED VALVES

Agricultural



The Solenoid Controlled Valve is the hydraulic control valve operated by line pressure and designed to ensure opening/closing process by means of built-in 3/2-way solenoid pilot valves controlled remotely with electric signal. Electric signal for solenoid pilot valves is ensured by means of a control device, time relay, main switch and PLC control units etc.


Opening/Closing process may be realized easily thanks to manual control on solenoid pilot valve. Depending on desire, 24V AC 50Hz/60Hz or 12V DC, 9V DC LATCH and 12V DC latch normally open (N.O.) or normally closed (N.C.) solenoid coils may be used on main valve.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Electric voltage value to be used volt

11

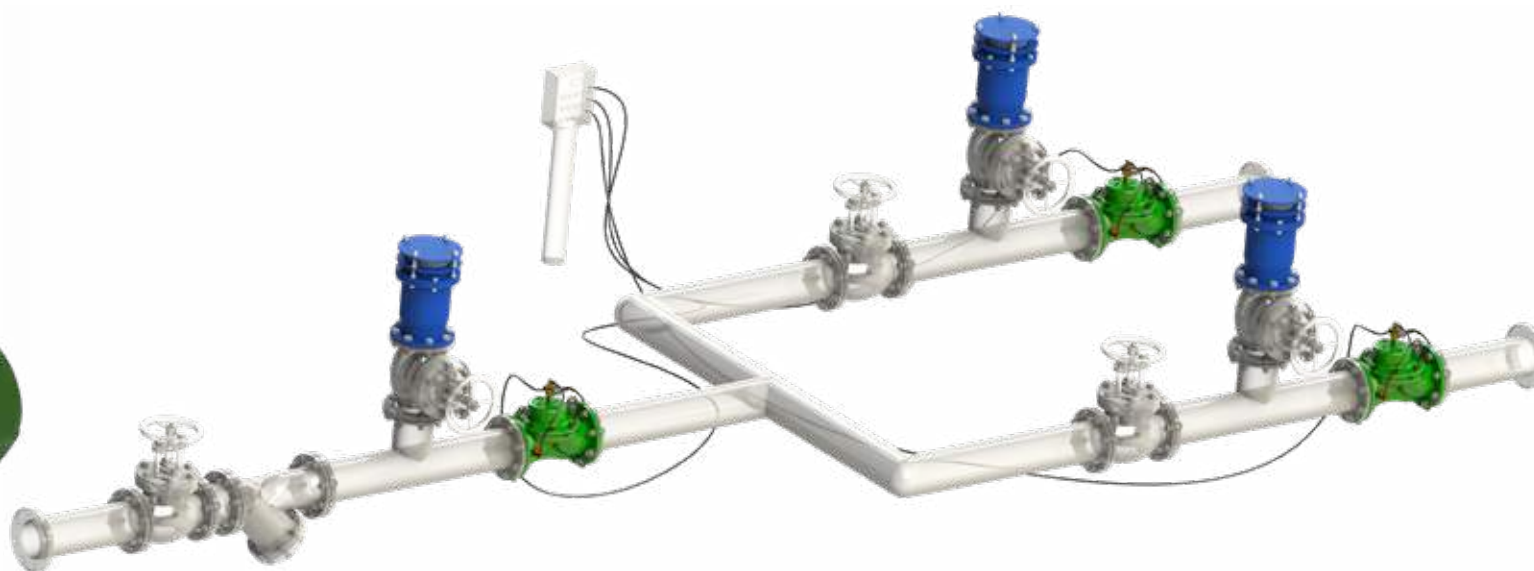

PRESSURE REDUCING & SUSTAINING CONTROL VALVE

Agricultural

The Pressure Reducing and Sustaining Control Valve is the control valve that reduces the output pressure to the desired value by holding the input pressure. There are two pilots on the valve. The pilot in the inlet direction is the pressure stabilization pilot and fixes the inlet pressure.

The other pilot ensures that the pressure reducer remains constant by reducing the pilot pressure and the output pressure to the desired value. The pressure reducing and stabilizing control valve allows the system to operate at normal values by reducing excessive flow in the downward slope direction and lowering the high pressure. The valve keeps constantly controlling the inlet pressure and outlet pressure without being influenced by the flow rate changes.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure..... bar
Desired outlet pressure value..... bar
Desired valve inlet pressure bar



PRESSURE REDUCING SOLENOID CONTROLLED VALVE

Agricultural




Solenoid Controlled Pressure Reducing Control Valve is a hydraulic control valve that reduces the input pressure value to the desired pressure value. The control of the main valve is effected by solenoid coils mounted on it.

The solenoid valve is provided with an electrical signal, a control device, a time relay, a switch, a PLC control unit, and control equipment. Thus, automation and control in application systems are easily achieved.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Maximum valve inlet pressure bar
- Minimum valve inlet pressure..... bar
- Desired outlet pressure value..... bar
- Electric voltage value to be used volt

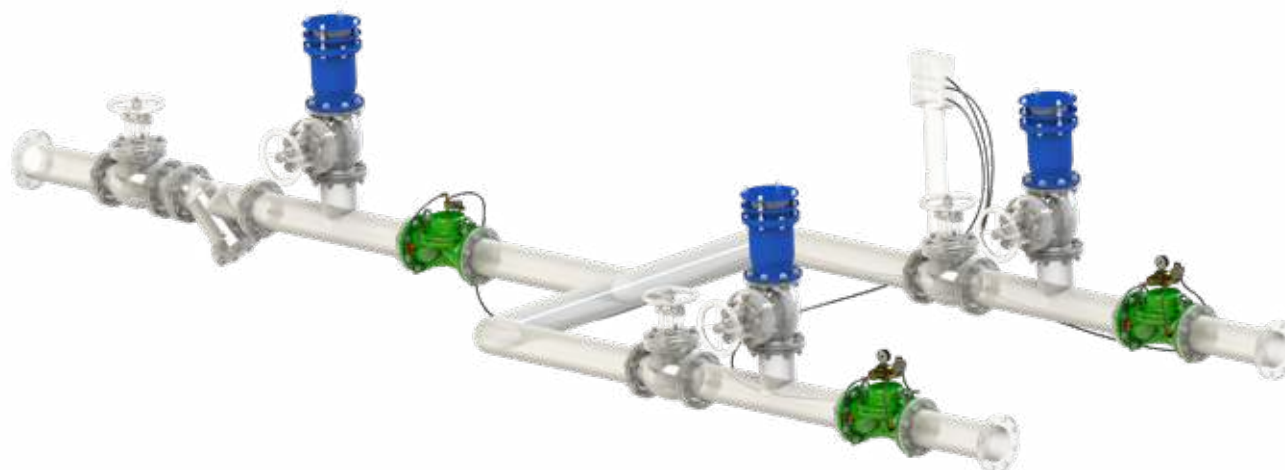

Agricultural

Pressure Sustaining Control Valve is a hydraulic control valve designed to protect the system by rapidly discharging the high pressure wave by sudden opening movement in water systems with excessive pressure increase. With the pilot on the valve, the input pressure is adjusted with the desired pressure. If for any reason the inlet pressure in the system rises above the set value, the valve is opened quickly to release the excess pressure to the outside and the system is protected.

Despite its sudden opening, due to the hydraulic principle of operation, the closing of the valve is slowed down so as not to create a ripple. It provides a completely leak-tight seal. It can also be used as a safety and warning valve at the exit points of the pressure reducing control valves alone at critical points in the water system.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Desired valve inlet pressure bar

PRESSURE SUSTAINING CONTROL VALVE



HYDRAULIC CHECK VALVE

Agricultural



Hydraulic Check Valve is hydraulically controlled check valve which operates with line pressure and prevents back-flow in system. When downstream pressure value exceeds upstream pressure value, valve is closed as wholly sealed without causing surge.


When upstream pressure value exceeds downstream pressure value, check valve is opened by itself slowly. So it damps pressure surges formed during start-up.

Order Information

Please provide the following information in order

- Maximum flow rate m^3/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type

15

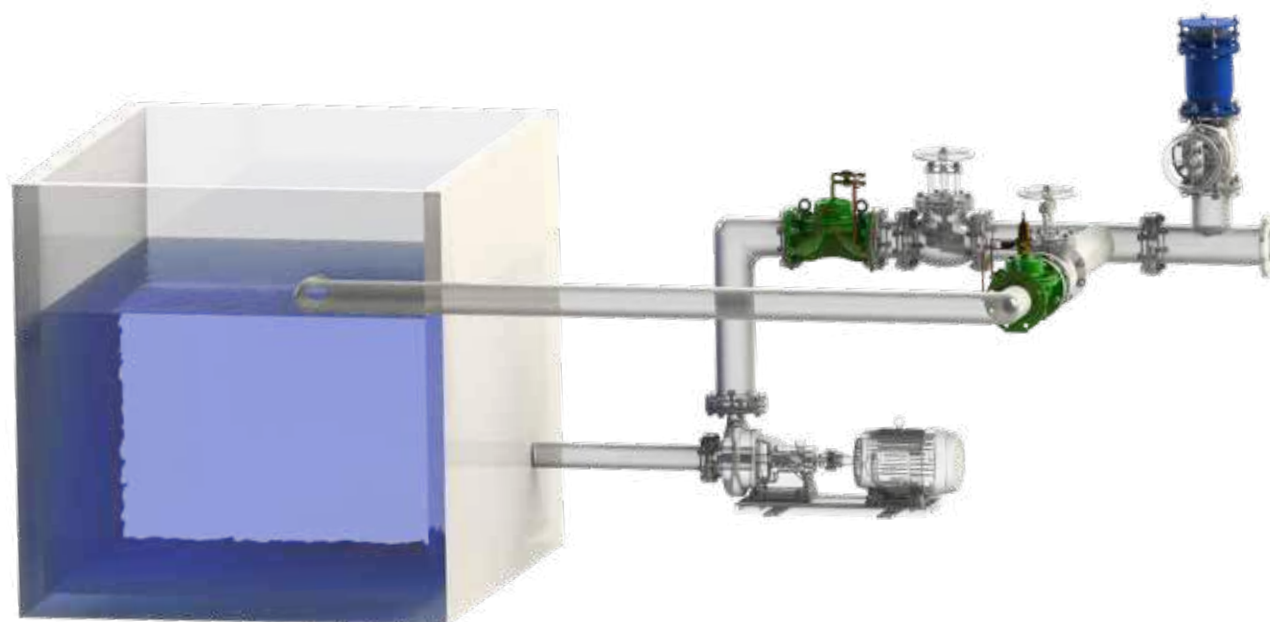

Agricultural

The Quick Pressure Relief Control Valve is the safety control valve designed to protect system by releasing pressure surges to atmosphere quickly caused from sudden changes in water speed because pumps put into/ out of service frequently in water network elevation lines.


When network pressure goes beyond set point, valve opens by itself quickly and protects system by releasing over pressure. When line pressure decreases to normal level, it is closed slowly and automatically as wholly sealed without causing surge.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Maximum valve inlet pressure bar
- Desired inlet pressure value..... bar

QUICK PRESSURE RELIEF CONTROL VALVE

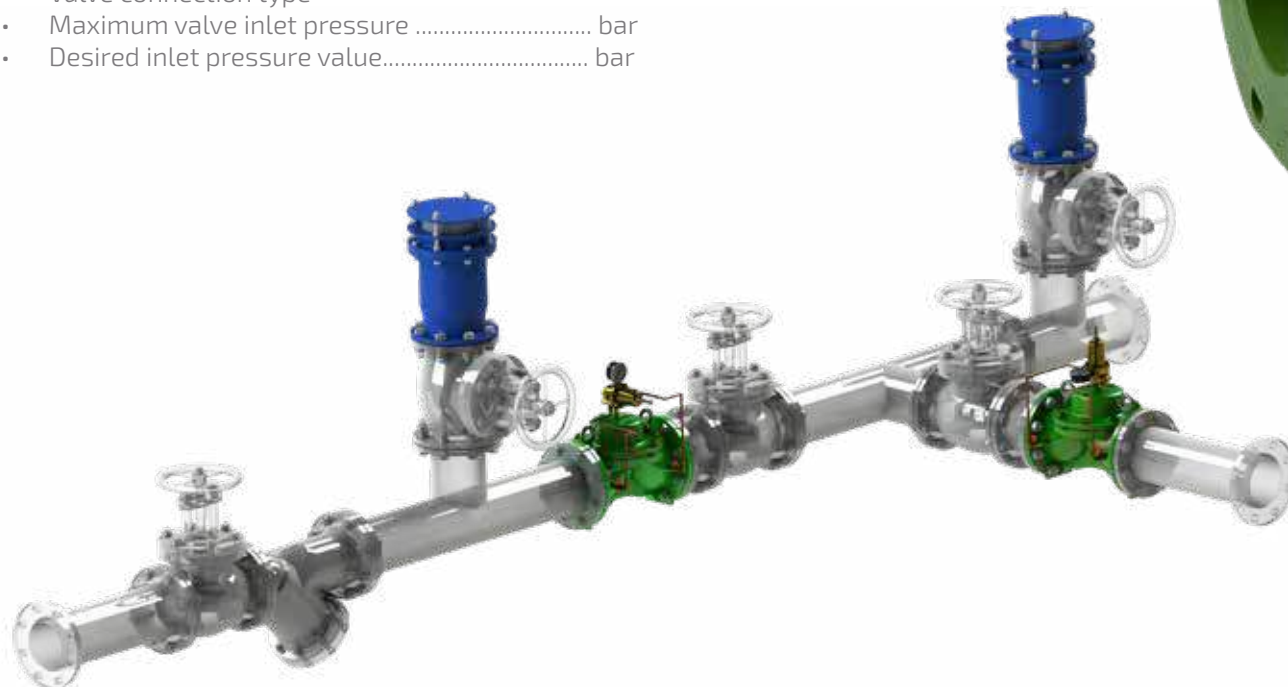

FLOAT LEVEL CONTROL VALVE

Agricultural




The Float Level Control Valve is the hydraulic control valve designed to control water level in reservoirs and tanks continuously. Main valve is controlled by 2-way modulating type float pilot valve manually.

Main valve mounted on reservoir and tank upstream is closed as fully sealed without causing surge when water level reaches to maximum level. Valve opening/closing speed may be adjusted in set value. It may be used in the system by mounting horizontal or vertical positions.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type

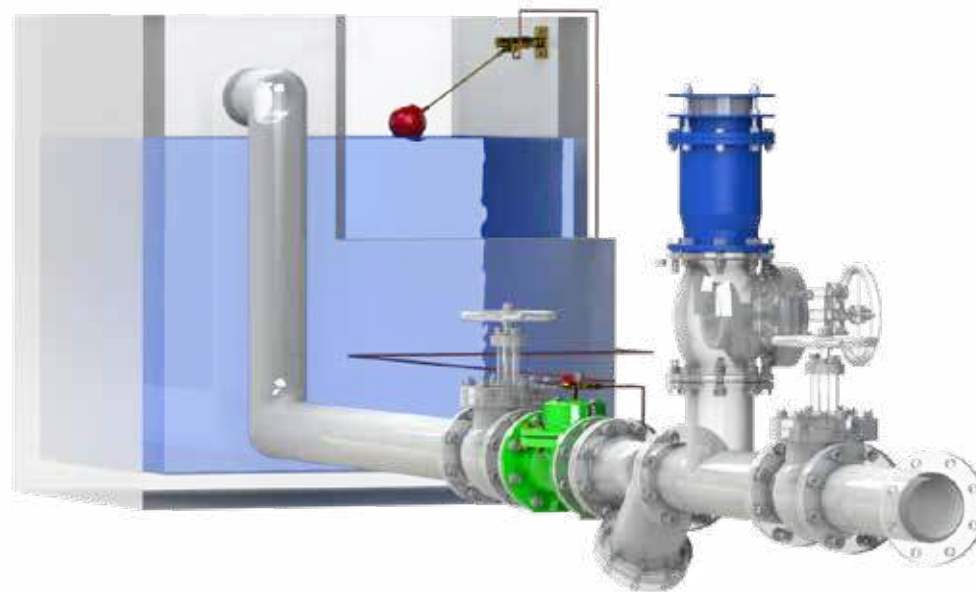

Agricultural


The Differential Float Level Control Valve is the hydraulic control valve designed to control water level in reservoirs and tanks continuously. Main valve is controlled by 2-way modulating type float pilot valve manually. Main valve mounted on reservoir and tank upstream is closed as fully sealed without causing surge when water level reaches to maximum level. Valve opening/closing speed may be adjusted in set value. It may be used in the system by mounting horizontal or vertical positions.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Desired level control range -m

DIFFERENTIAL FLOAT LEVEL CONTROL VALVE

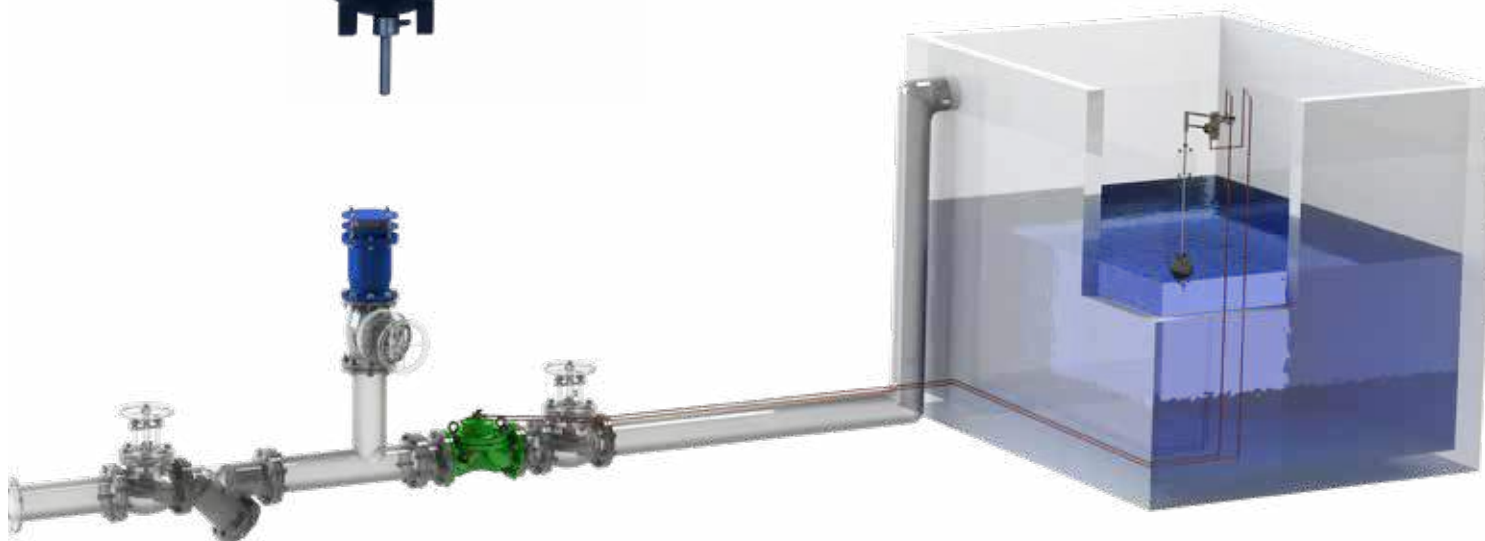

ELECTRIC FLOAT LEVEL CONTROL VALVE

Agricultural



Electric Float Level Control Valve is a valve that constantly controls water level by electric float placed in the tank. When the water level at the bottom falls below the desired value, the electric float switch sends a signal to the solenoid coil on the main valve.


This allows the valve to open itself fully and keep the reservoir constantly full. When the water level reaches the maximum level, the electric switch sends a signal again to the solenoid coil and the valve closes itself. The valve can be operated on the system horizontally or vertically.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Electric voltage value to be used volt

19

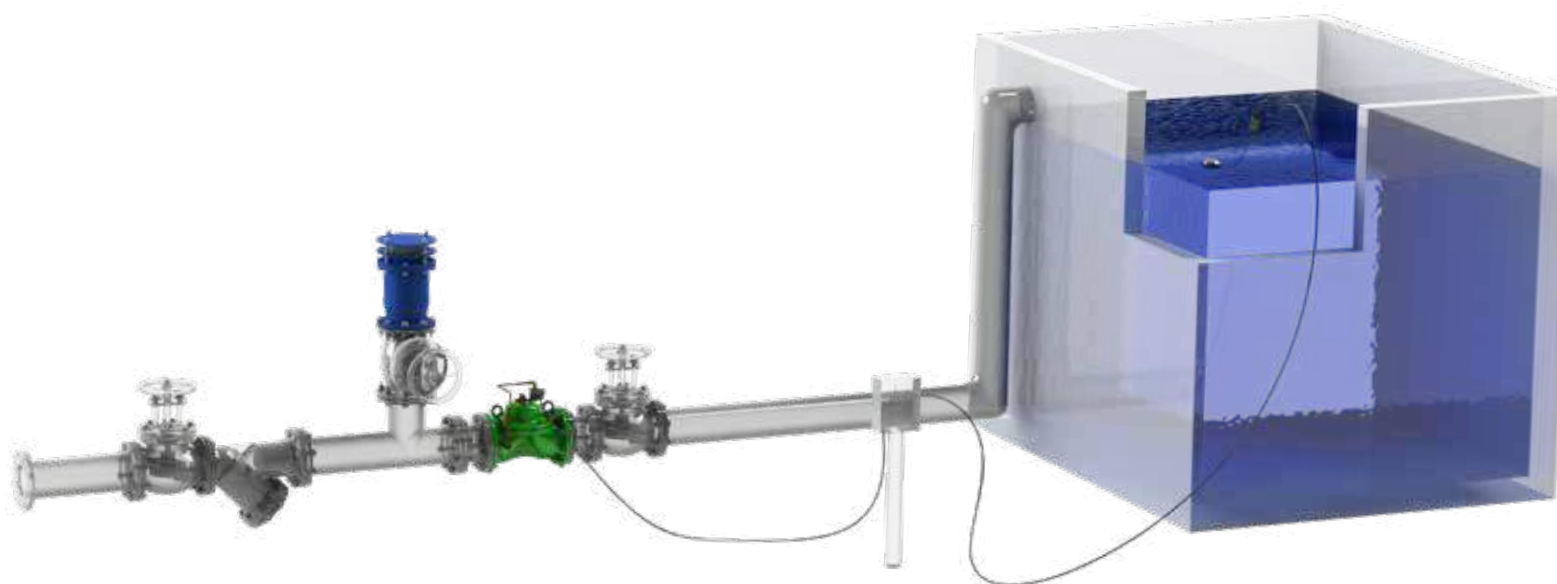


Agricultural

Pump Control Valve is a control valve designed for putting booster type pumps into/out of service automatically which is used water network elevating lines. When start button is pressed, pump control valve is opened by itself slowly in comparison with booster pump until pump rotation will reach working rotation. When "stop" button is pressed, control valve is closed slowly without causing surge in the first plan. When pump control valve was closed as fully sealed, it is disengaged from system by means of "Limit Switch" on it. In situations like energy interruption, works as a check valve to prevent back-flow to pump and eliminates use of an extra check valve in the system.


Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type

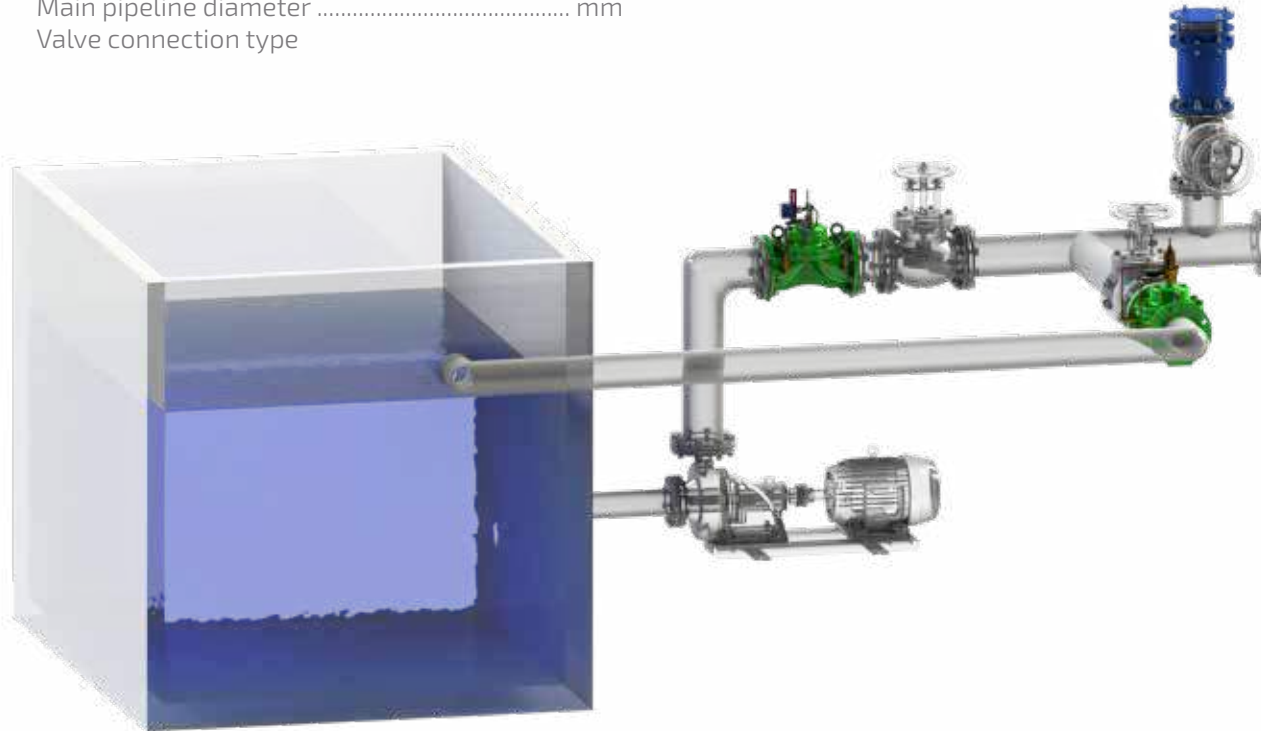

PUMP (Booster) CONTROL VALVE

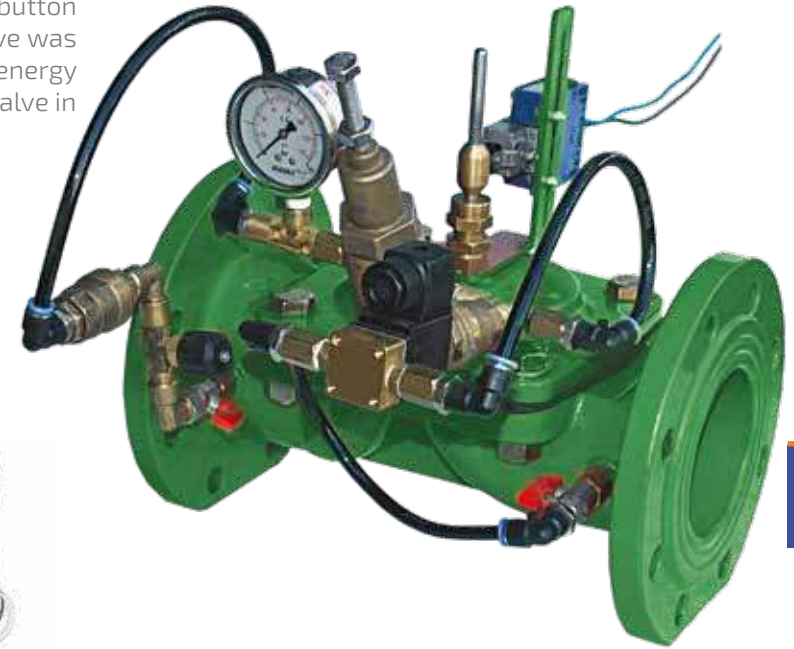

SURGE ANTICIPATING CONTROL VALVE


Agricultural

The Surge Anticipating Control Valve is the safety control valve designed to protect system in relatively longer water supply network elevating line by damping energy waves formed by energy interruptions in pumping systems and by releasing waterhammers which are caused from sudden changes in water flow rate to atmosphere automatically and quickly. Valve is opened quickly by sensing diminished pressure wave previously by means of pressure signal tube it owned. When line pressure reached normal level, it is closed slowly and automatically as wholly sealed

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type

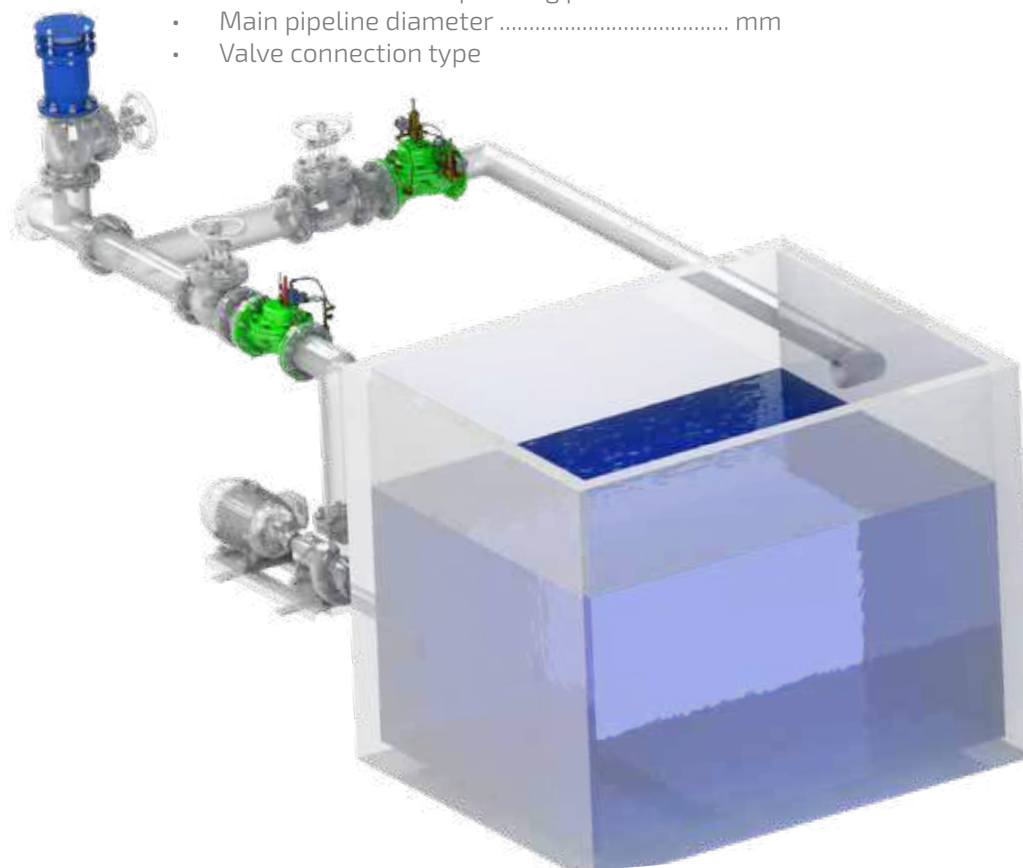

FLOW CONTROL VALVE

Flow control valves are hydraulic control valves designed to limit the amount of flow demanded. A pressure difference is created with the orifice at the valve inlet, and the flow control pilot installed in the control chamber detects the pressure difference and ensures that the control valve remains open at the desired flow rate. Flow control valve limits the amount of flow desired to be adjusted by keeping it constant without being affected by the inlet pressure and flow values.

It is also used to prevent the pump from overloading and cavitation. It avoids excessive water loss by preventing excessive flow during backwashing process in filtration systems. It avoids excessive water loss by limiting the excessive demands of consumers.



Y TYPE CONTROL VALVE



TYPHOON Y Type Automatic Hydraulic Control Valves have been designed in "Y" body model type, with their high modulation capacity, to work with minimum pressure loss, cavitation and noise in hard working conditions with high pressure differences.

TYPHOON Y Type Automatic Hydraulic Control Valves must close the flap with double chamber diaphragm actuator. It has double control chamber as standard. It can be used as a single chamber without using an extra control chamber. In addition, V-Port is added to the valve, providing excellent control in low flow applications. It operates in a controlled and smooth manner thanks to the valve shaft which is rigidly mounted on the valve body, and opens and closes fully sealed without causing any impact.

TYPHOON Y Type Automatic Hydraulic Control Valves can be obtained by adding various control equipments to the Basic valve body and valves that can perform different tasks.


TYPHOON Y Type Automatic Hydraulic Control Valves are used in drinking water promotion lines, agricultural irrigation, fire systems, filtration, industrial etc. It is designed to be used in areas.

Features

- Easy to use and maintain with its simple structure
- Lower costs
- Working in wide pressure range
- Perfect modulation even at low flow rates
- Impact-free opening and closing with flexible diaphragm
- Complete sealing with reinforced diaphragm and inner spring
- Long life with epoxy -Polyester coating
- Wide control application area with the use of different pilot valves
- Ability to work in horizontal and vertical positions in the application areas




Y TYPE CONTROL VALVE

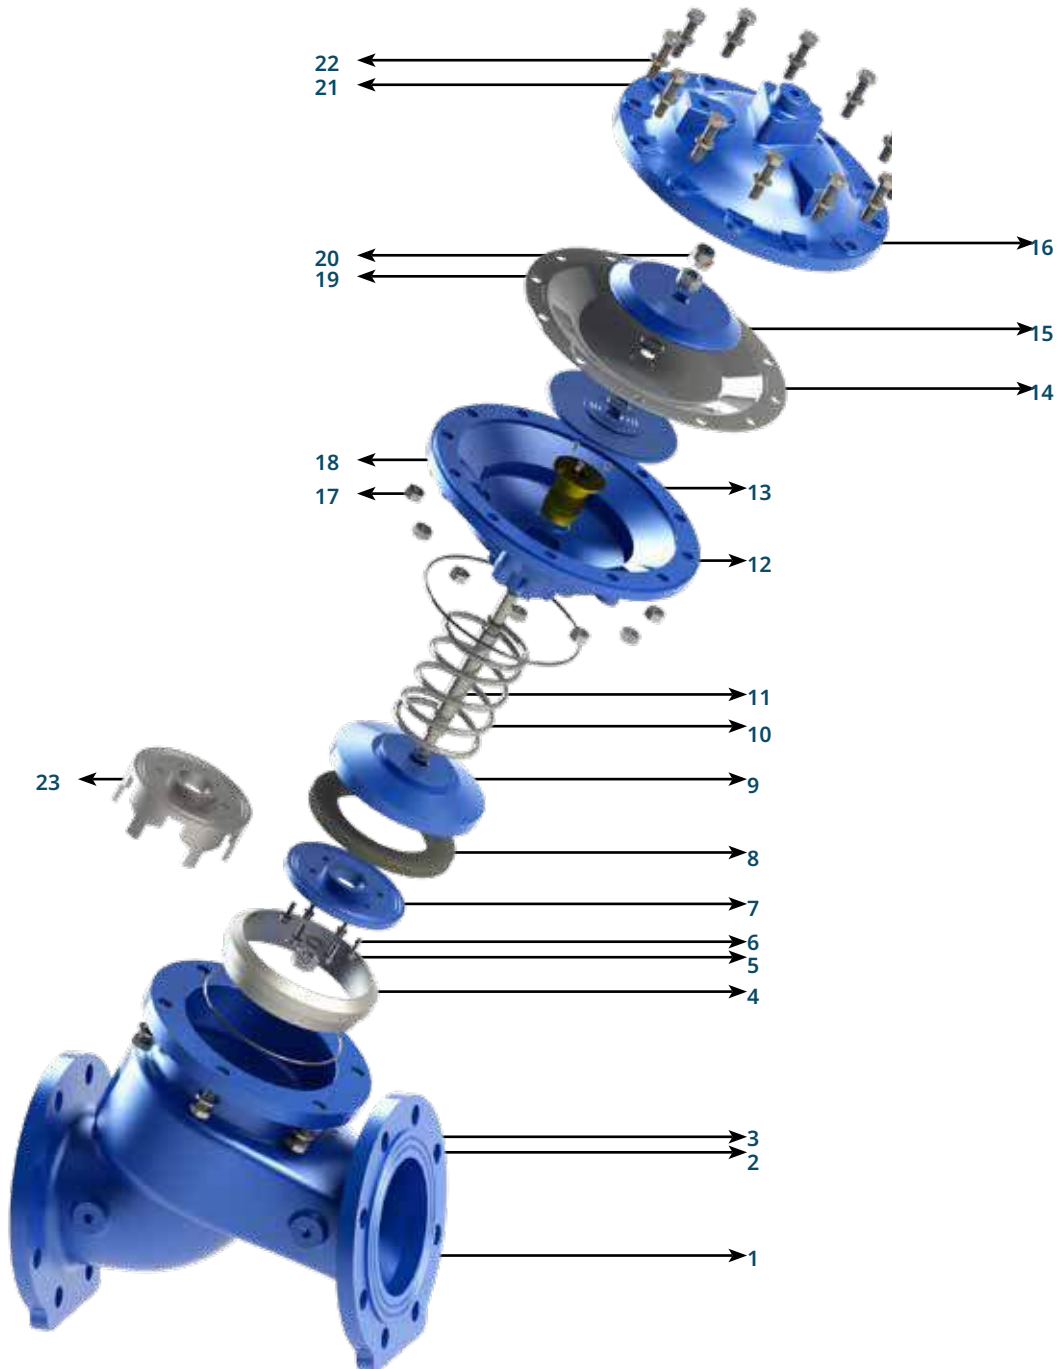

#	Material Name	Type of material
1	Body	GGG40
2	Bolt	A2
3	Washer	A2
4	Body Bushing	Stainless Steel
5	Washer	A2
6	Bolt	A2
7	Flap	GGG40
8	Sealing Rubber	Natural Rubber
9	Bowl	GGG40
10	Spring	AISI302
11	Shaft	AISI302
12	Bottom Cover	GGG40
13	Bottom Cap Bushing	Brass
14	Diaphragm	Natural Rubber
15	Diaphragm Support	GGG40
16	Top Cover	GGG40
17	Nut	A2
18	Bolt	A2
19	Nut	A2
20	Nut	A2
21	Bolt	A2
22	Washer	A2
23	V-Port (Optional)	Stainless Steel


Y TYPE CONTROL VALVE

Sizes and Weights

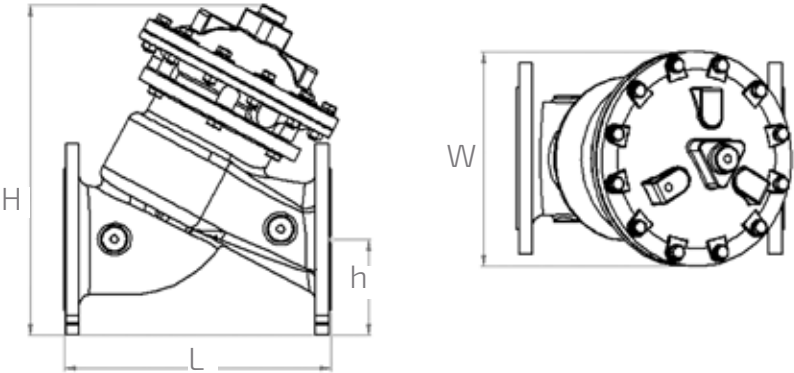

25

	DN		L		h		H		W		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
THREADED	1 1/2	40	7,09	180	1,83	46,50	9,60	244	6,50	165	23,15	10,50
	2	50	7,09	180	1,83	46,50	9,60	244	6,50	165	22,70	10,30
	2 1/2	65	7,09	180	1,83	46,50	9,60	244	6,50	165	22,04	10
	2	50	8,86	225	3,25	82,50	11,61	295	6,50	165	28,67	13
FLANGED	2 1/2	65	8,86	225	3,64	82,50	11,61	295	7,28	185	33,08	15
	3	80	11,86	300	3,94	100	15,61	385	8,27	210	66,15	30
	4	100	12,60	320	4,53	155	15,75	400	9,84	250	77,18	35
	5	125	13,07	332	4,92	125	16,22	412	9,84	250	85,98	39
	6	150	15,75	400	5,61	142,50	19,49	495	12,60	320	154,35	70
	8	200	19,88	505	6,69	170	22,83	580	16,34	415	264,60	120
	10	250	26,57	675	7,97	202,5	29,53	750	20,28	515	485	230
	12	300	30,51	775	9,05	230	34,37	873	24,21	615	772	350

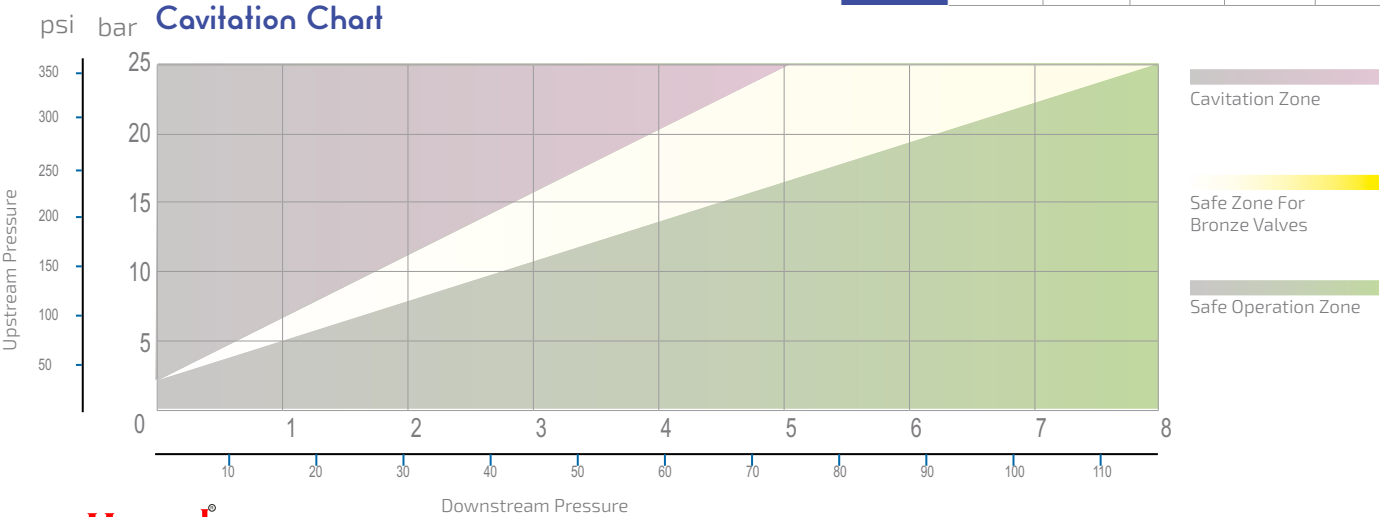

Y TYPE CONTROL VALVE


Usage With Single Chamber Actuator

The valve actuator is made with a single chamber by removing 2 blind plugs located under the bottom cover and inserting a blind plug into the port next to the bottom cover. In this case, the pressures are P1, P2, P3.

P1: Inlet pressure

P2: Outlet Pressure

P3: Actuator Pressure

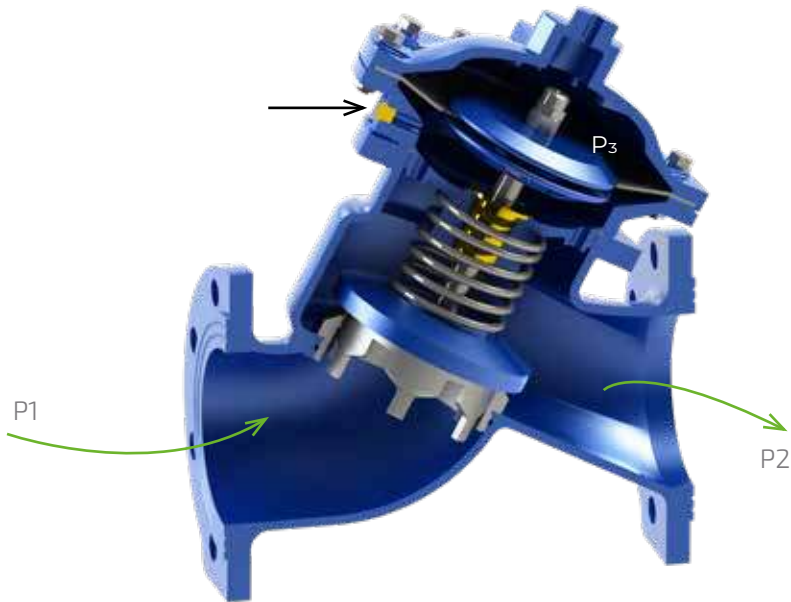

26

Usage with Double Chamber Actuators


The valve actuator is turned into double chamber by closing the blind plug with 2 port holes under the bottom cover and opening the port hole next to the bottom cover. In this case, the pressures are P1, P2, P3, P4.

P1: Inlet pressure


P2: Outlet Pressure

P3: Actuator Pressure

P4: External Pressure}

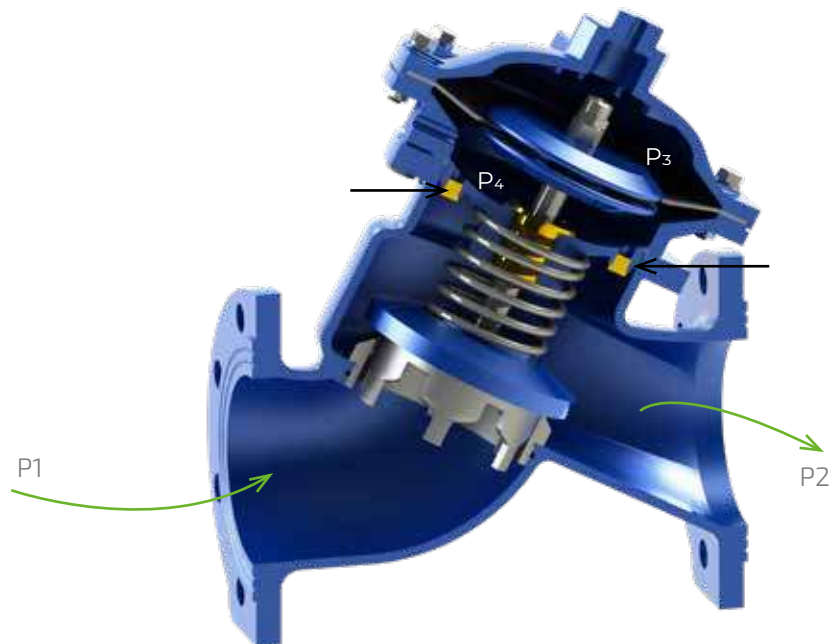

Y TYPE CONTROL VALVE

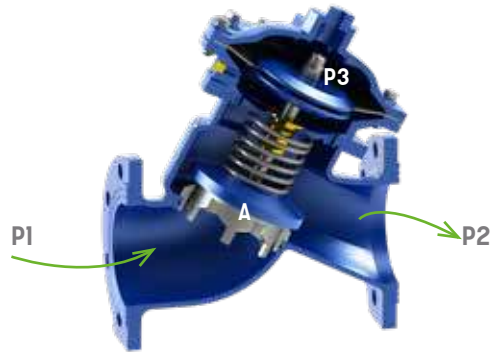

Working Principles

They are automatic control valves with double chamber diaphragm actuators, which are used to perform hydraulically desired operations with line pressure without the need for energy sources in the network line.

P1 : Inlet Pressure

P2 : Outlet Pressure

P3 : Actuator Pressure

P_{spring} : Spring Force

A : The Valve's Influence


Valve Closing Mode

When the pilots on the main control valve bring the inlet pressure (P1) above the diaphragm, the water creates hydraulic force. Though to this force, the valve flap fits into the body bushing and ensures the valve to be closed in a fully sealed manner.

If the forces are examined in closing mode ;

$$P_3 \times 3A + P_{spring} > P_1 \times A$$

Inequality is achieved. If there is no external influence on the area indicated by the P_3 pressure, the P_3 pressure will be equal to the maximum P_1 pressure.




Valve Opening Mode

The inlet pressure of the main control valve is provided to open the valve by overcoming the spring force that helps the closing process and the force created by the pressure P3 on the diaphragm.

If the forces are examined in opening mode ;

$$P_1 \times A > P_{spring} + P_3 \times 3A$$

Inequality is achieved. As the area indicated by the pressure P3 is evacuated, the differential pressure becomes 0. Thus, $P_1 \times A$ force is overcome by spring force and the valve is opened. Spring force determines the minimum opening pressure that enables the valve to open.




Modulation Mode

The pilots on the main control valve constantly control the pressure of the fluid and enable it to operate in modulation mode.

If the forces are examined in modulation mode ;

$$P_1 \times A + P_2 \times 3A = P_3 \times 3A + P_{spring} + P_2 \times A$$

Equality is achieved. The pilot valve, which enables the valve to operate in modulation mode, regulates the pressures of P_2 and P_3 , providing force equality. Thus, the valve operates in modulation mode.



Fire Systems

Pressure Reducing Control Valves are hydraulic control valves that reduce the input pressure value to the desired pressure value by means of a pressure reducer pilot mounted on it. The pressure reducer control valve constantly controls the output pressure value to be set without being influenced by the flow rate and inlet pressure values. When there is no flow in the system, the valve closes itself. When the valve inlet pressure value in the system falls below the set outlet pressure value, the valve opens itself. The valve can be used in horizontal or vertical position on the system.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure bar
Desired outlet pressure value bar

PRESSURE REDUCING CONTROL VALVE



HYDRAULIC CHECK VALVE


Fire Systems

Hydraulic Check Valve is hydraulically controlled check valve which operates with line pressure and prevents back-flow in system. When downstream pressure value exceeds upstream pressure value, valve is closed as wholly sealed without causing surge. When upstream pressure value exceeds downstream pressure value, check valve is opened by itself slowly. So it damps pressure surges formed during start-up.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type

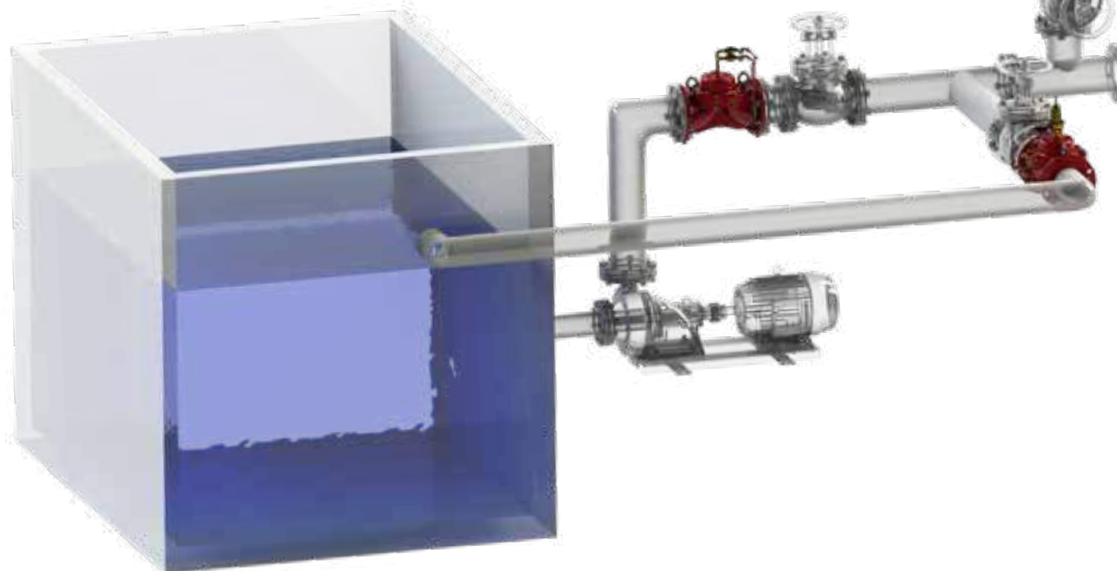

Fire Systems


The Quick Pressure Relief Control Valve is the safety control valve designed to protect system by releasing pressure surges to atmosphere quickly caused from sudden changes in water speed because pumps put into/ out of service frequently in water network elevation lines. When network pressure goes beyond set point, valve opens by itself quickly and protects system by releasing over pressure. When line pressure decreases to normal level, it is closed slowly and automatically as wholly sealed without causing surge.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type
- Desired inlet pressure value..... bar

**QUICK PRESSURE RELIEF
CONTROL VALVE**

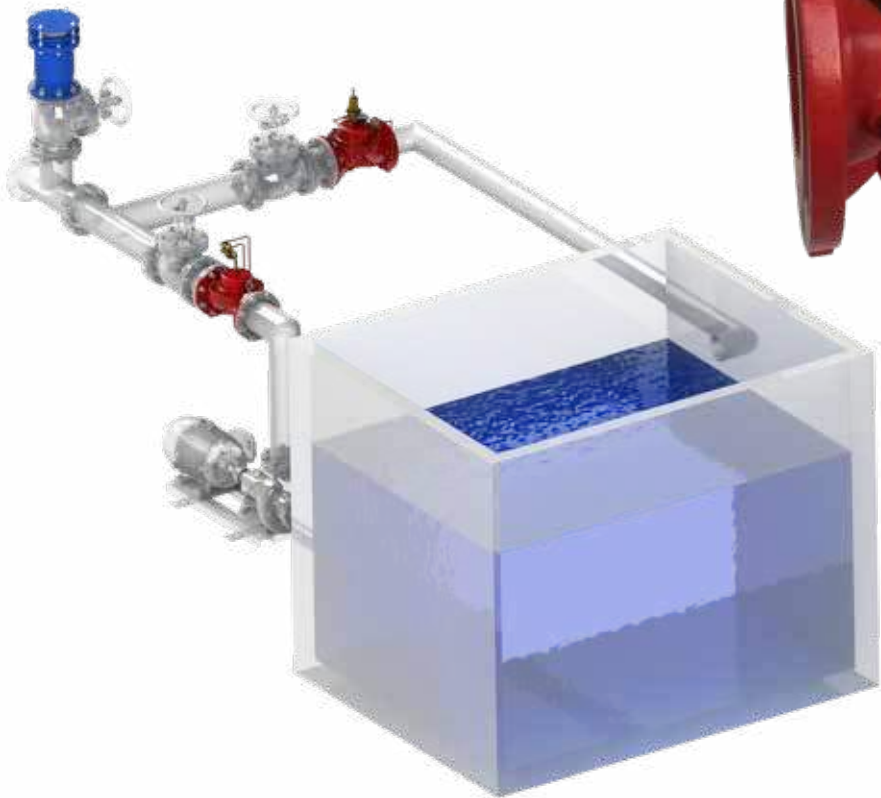

ELECTRIC FLOAT LEVEL CONTROL VALVE

Fire Systems



Electric Float Level Control Valve is a valve that constantly controls water level by electric float placed in the tank. When the water level at the bottom falls below the desired value, the electric floater sends a signal to the solenoid coil on the main valve. This allows the valve to open itself fully and keep the reservoir constantly full. When the water level reaches the maximum level, the electric switch sends a signal again to the solenoid coil and the valve closes itself. The valve can be operated on the system horizontally or vertically.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Electric voltage value to be used volt



Fire Systems


The Differential Float Level Control Valve is the hydraulic control valve designed to control water level in reservoirs and tanks continuously. Main valve is controlled by 2-way modulating type float pilot valve manually. Main valve mounted on reservoir and tank upstream is closed as fully sealed without causing surge when water level reaches to maximum level. Valve opening/closing speed may be adjusted in set value. It may be used in the system by mounting horizontal or vertical positions.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Desired level control range -m

DIFFERENTIAL FLOAT LEVEL CONTROL VALVE

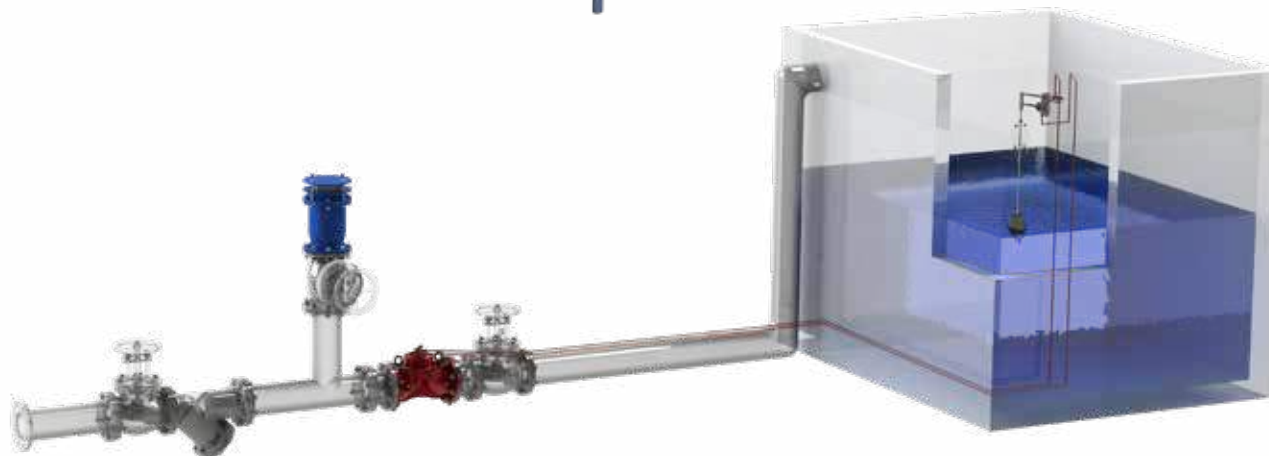

FLOAT LEVEL CONTROL VALVE


Fire Systems

The Float Level Control Valve is the hydraulic control valve designed to control water level in reservoirs and tanks continuously. Main valve is controlled by 2-way modulating type float pilot valve manually. Main valve mounted on reservoir and tank upstream is closed as fully sealed without causing surge when water level reaches to maximum level. Valve opening/closing speed may be adjusted in set value. It may be used in the system by mounting horizontal or vertical positions.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type

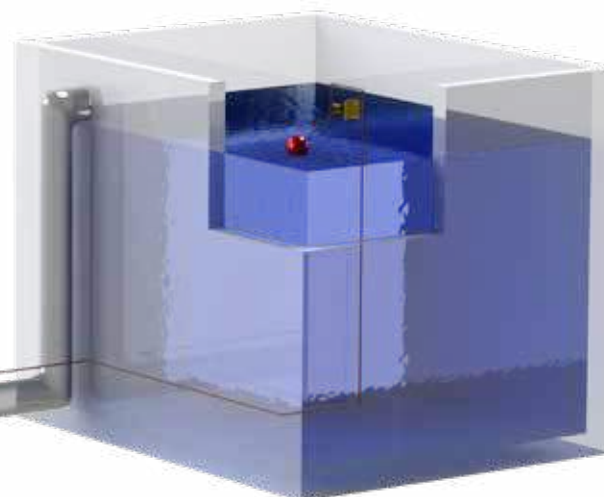

TYPHOON Plastic Hydraulic Valves are automatic control valves with diaphragm working with line pressure. Hydraulic Control Valves are used in agricultural irrigation, drinking water lines, filtration and industrial areas.

TYPHOON Plastic Valves are automatic control valves with diaphragm closure working with line pressure. Valve body and diaphragm design ensure smooth flow with minimum pressure loss. Since there is no bearing, bush and shaft in the valve body, valve life is longer. The only moving part of the valve is the diaphragm.

TYPHOON Plastic Hydraulic Control Valves are used in agricultural irrigation, drinking water lines, filtration and industrial areas.

Features

- Easy operation and maintenance with simple structure
- Lower costs
- Wide pressure range operation
- Perfect modulation even at low flow rates
- Flexible diaphragm to open and close without impact
- Fully sealed with reinforced diaphragm and internal spring
- Wide range of control applications with different pilot valves
- Ability to work in horizontal and vertical positions in application areas




HYDRAULIC CONTROL VALVES

Plastic

Model


Connection	Threaded	
Material	Glass Reinforced Polyamide	
Body	Globe	
Available Diameters	inch	mm
	3/4	25
	1	32
	1 1/2	40
	2	50
	2 1/2	65
Max. Operating Pressure	3"R	80R
	10 Bar	

35

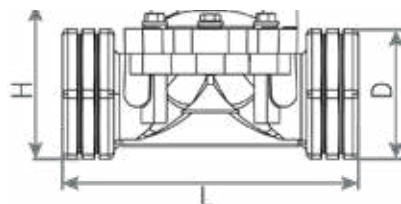

Dimensions and Weights


DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
3/4	20	1,73	44	5,51	140	2,36	62,50	0,66	0,30
1	25	1,73	44	5,51	140	2,36	62,50	0,66	0,30
1 1/2	40	2,48	63	7,91	201	4,28	100,00	2,54	1,15
2	50	2,95	75	8,07	211	4,33	105,50	2,65	1,20
2 1/2	65	3,66	93	8,64	219	4,64	112,50	3,09	1,40
3"R	80R	4,33	110	8,78	223	4,88	124,50	3,42	1,55

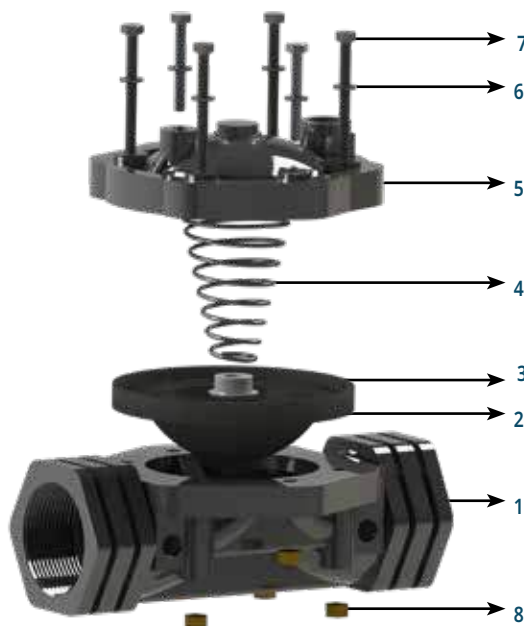

Main Parts

#	Material Name	Type of Material
1	Body	Glass Reinforced Polyamide
2	Diaphragm	Natural Rubber
3	Spring Seat	Polypropylene
4	Spring	SST 302
5	Cover	Glass Reinforced Polyamide
6	Washer	A2 Stainless Steel
7	Bolt	A2 Stainless Steel
8	Nut	Brass

Pressure Loss Chart

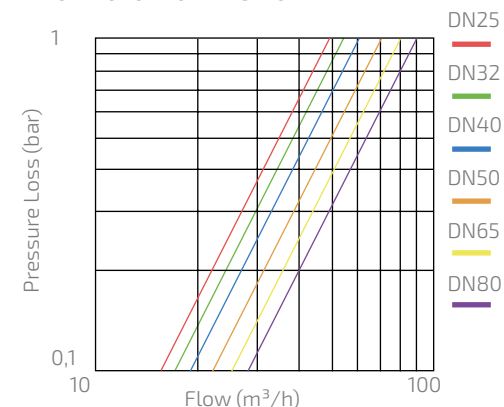

Hydraulic Performance

	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
Valve Diameter	3/4	25	1	32	1 1/2	40	2	50	2 1/2	65	3"R	80R
Kv m³/h@1bar	50		55		60		70		80		90	
Cv gmp@1psi	56		66		69		81		92		104	

$$Kv(Cv) = Q \cdot \sqrt{G/\Delta P}$$

Kv : Valve flow coefficient (flow rate at 1 bar pressure loss m³/h @ 1 bar)

Cv : Valve flow coefficient (flow in pressure loss of 1 psi GPM @ 1 psi)

Q : Flow (m³/h, gpm)

Cv = 1,155Kv

ΔP : Pressure Loss (bar, psi)

G : The specific gravity of water(Water=1.0)

Working Principles

It is a fully automatic hydraulic control valve designed to perform the hydraulically desired modulation processes with the line pressure without the need for different energy sources such as electricity, pneumatic or mechanical in the main valve mains line.


Valve Closing Mode

Pilot valves connected to the main valve create a hydraulic force on the valve diaphragm when the water pressure at the valve inlet reaches the actuator (control reservoir) of the valve. This hydraulic force that is created combines the diaphragm of the valve with the extra force exerted by the internal spring to ensure a tight seal.




Valve Opening Mode

When the path of the pilot valve on the main valve in the closed position is set to the discharge position, the pressurized water in the control chamber on the diaphragm of the main valve is discharged. When the line pressure reaches the spring force, the valve diaphragm applies a hydraulic force to the diaphragm to bring the valve into the full open position.

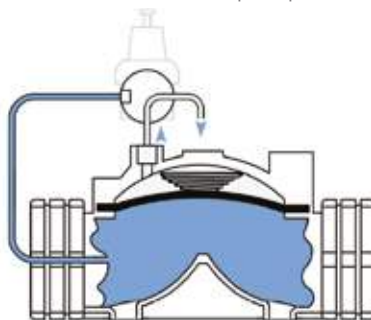

Modulation Mode

The pilot valves that connect the actuator to the main valve allow the main valve to operate in the modulated position. The valve in the actuator of the main valve (control reservoir), according to the flow quantity or pressure conditions to be adjusted, ensures that the fluid continuously operates in the modulated position by controlling the pressure.

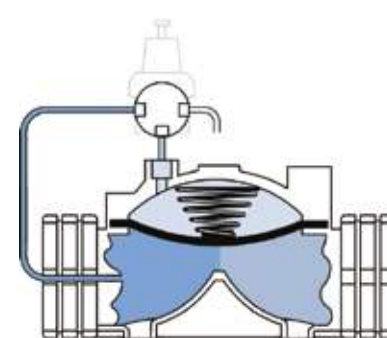

HYDRAULIC CONTROL VALVES


Plastic

Large Body / Flanged - Threaded

Model

Connection	Flanged - Threaded	
Material	Glass Reinforced Polyamide	
Body	Globe	
Available Diameters	inch	mm
	3	80
	4	100
	5	125
	6	150 (Flanged)
Max. Operating Pressure	10 Bar	

Pressure Loss Chart

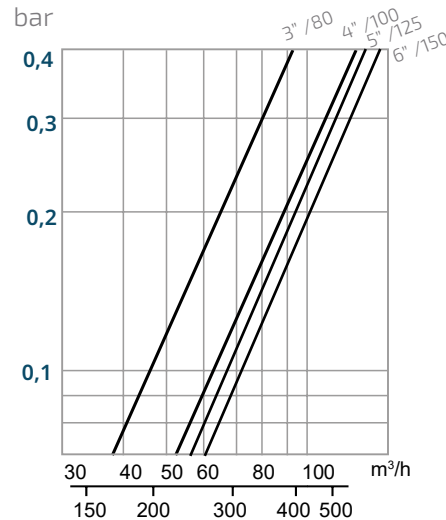


Main Parts

#	Material Name	Type of Material
1	Body	Glass Reinforced Polyamide
2	Flange Adapter	Glass Reinforced Polyamide
3	Flange	Glass Reinforced Polyamide
4	Diaphragm	Natural Rubber
5	Spring Seat	Polypropylene
6	Spring	SST302
7	Cover	Glass Reinforced Polyamide
8	Bolt	8.8 Coated Steel
9	Nut	8.8 Coated Steel
10	Rondela	8.8 Coated Steel




37

Dimensions and Weights

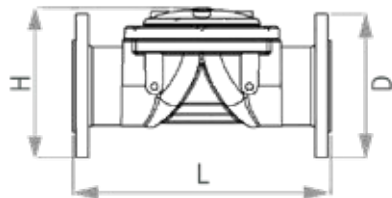

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
3	80	7,87	200	14,57	370	8,66	220	14,52	6,60
4	100	9,00	227	14,57	370	9,17	233	16,28	7,40
5	125	10,11	257	13,35	390	9,96	253	16,53	7,5
6	150	11,02	280	15,55	395	10,43	265	16,76	7,6

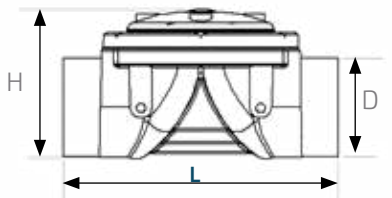

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
3	80	4,72	120	11,58	294	7,05	179	10,25	4,65
4	100	4,72	120	13,23	336	7,28	185	9,70	4,40

Hydraulic Performance

	inch	mm	inch	mm	inch	mm	inch	mm
Valve Diameter	3	80	4	100	5	125	6	150
Kv m³ / h @1bar	166		208		215		220	
Cv gmp @1psi	193		242		248		260	

$$Kv(Cv) = Q \cdot \sqrt{G/\Delta P}$$

Kv : Valve flow coefficient (flow rate at 1 bar pressure loss m³/h @ 1 bar)

Cv : Valve flow coefficient (flow in pressure loss of 1 psi GPM @ 1 psi)

Q : Flow (m³/h, gpm)

Cv = 1,155Kv

ΔP : Pressure Loss (bar, psi)

G : The specific gravity of water(Water=1.0)


Model

Connection	Threaded	
Material	Glass Reinforced Polyamide	
Body	Angled Globe	
Available Diameters	inch	mm
	2	50
	2 1/2	65
	3"R	80R
Max. Operating Pressure	10 Bar	



Main Parts

#	Material Name	Type of Material
1	Body	Glass Reinforced Polyamide
2	Diaphragm	Natural Rubber
3	Spring Seat	Polypropylene
4	Spring	SST 302
5	Cover	Glass Reinforced Polyamide
6	Bolt	A2 Stainless Steel
7	Washer	A2 Stainless Steel
8	Nut	Brass

Regular / Angled

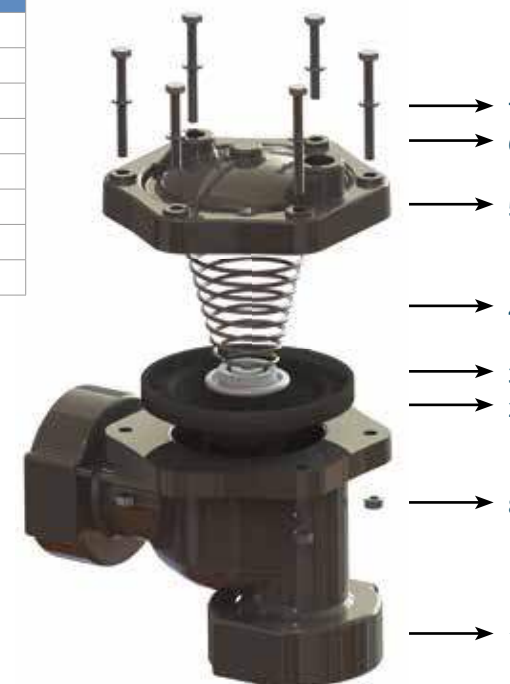

Pressure Loss Chart

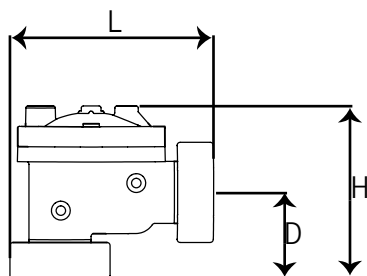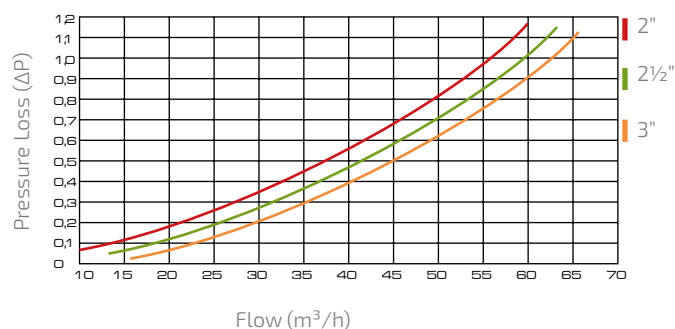

Dimensions and Weights

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
2	50	3,4	86	8	203	6,77	172	2,86	1,30
2 1/2	65	3,4	86	8	203	6,77	172	2,86	1,20
3"R	80R	3,4	86	8	203	6,77	172	2,86	1,06

Hydraulic Performance

	inch	mm	inch	mm	inch	mm
Valve Diameter	2	50	2 1/2	65	3"R	80R
Kv m³ / h @1bar	51,0		56,0		66,0	
Cv gmp @1psi	58,9		64,7		76,2	

$$Kv(Cv) = Q \cdot \sqrt{G/\Delta P}$$

Kv: Valve flow coefficient (flow rate at 1 bar pressure loss m³/h @ 1 bar)

Cv: Valve flow coefficient (flow in pressure loss of 1 psi GPM @ 1 psi)

Q: Flow (m³/h, gpm)

Cv = 1,155Kv

ΔP: Pressure Loss (bar, psi)

G : The specific gravity of water(Water=1.0)

HYDRAULIC CONTROL VALVES

Plastic

Angled Large Body / Flanged - Threaded




Main Parts

#	Material Name	Type of Material
1	Body	Glass Reinforced Polyamide
2	Diaphragm	Naturel Rubber
3	Spring Wedge	Polypropylene
4	Spring	SST 302
5	Cover	Glass Reinforced Polyamide
6	Washer	8.8 Coated Steel
7	Bolt	8.8 Coated Steel
8	Nut	8.8 Coated Steel
9	Flange	Glass Reinforced Polyamide
10	Adapter	Glass Reinforced Polyamide

Model

Connection	Flanged - Threaded	
Material	Glass Reinforced Polyamide	
Body	Angled Globe	
Available Diameters	inch	mm
	3	80
	4	100
Max. Operating Pressure	6	150
	10 Bar	

39

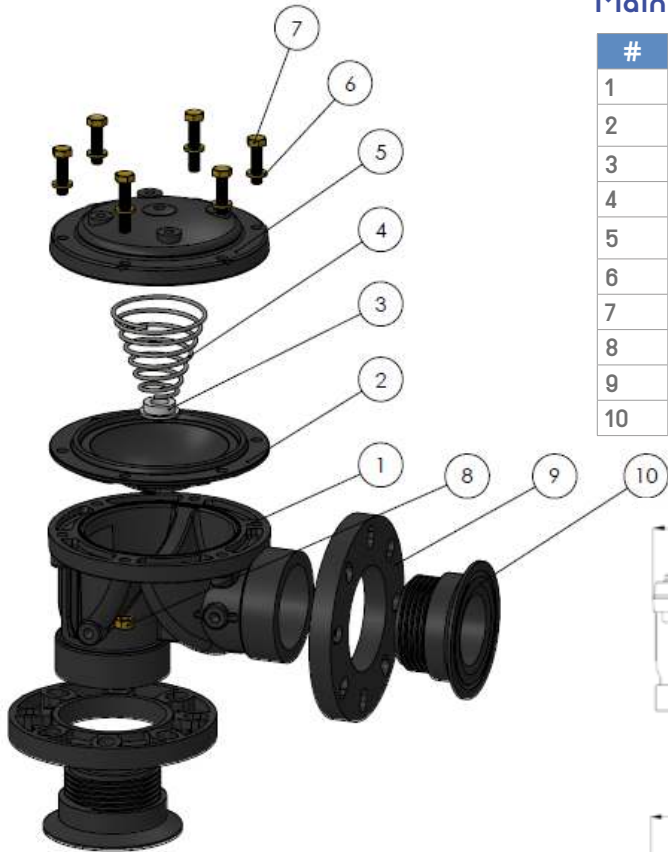

Dimensions and Weights

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
3	80	3,9	99	10,9	277	8,78	223	11,13	5,05
4	100	3,9	99	10,9	277	8,78	223	10,8	4,90

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
3	80	5,08	129	13,42	341	9,96	253	15,43	7
4	100	5,35	136	14,84	377	10,28	261	17,19	7,8
6	150	6,38	162	16,18	411	11,14	283	17,64	8

$$Kv(Cv) = Q \cdot \sqrt{G/\Delta P}$$

Kv : Valve flow coefficient (flow rate at 1 bar pressure loss m³/h @ 1 bar)

Cv : Valve flow coefficient (flow in pressure loss of 1 psi GPM @ 1 psi)

Q : Flow (m³/h, gpm)


Cv = 1,155Kv

ΔP : Pressure Loss (bar, psi)

G : The specific gravity of water(Water=1.0)

HYDRAULIC CONTROL VALVES

Manual Flow Lever

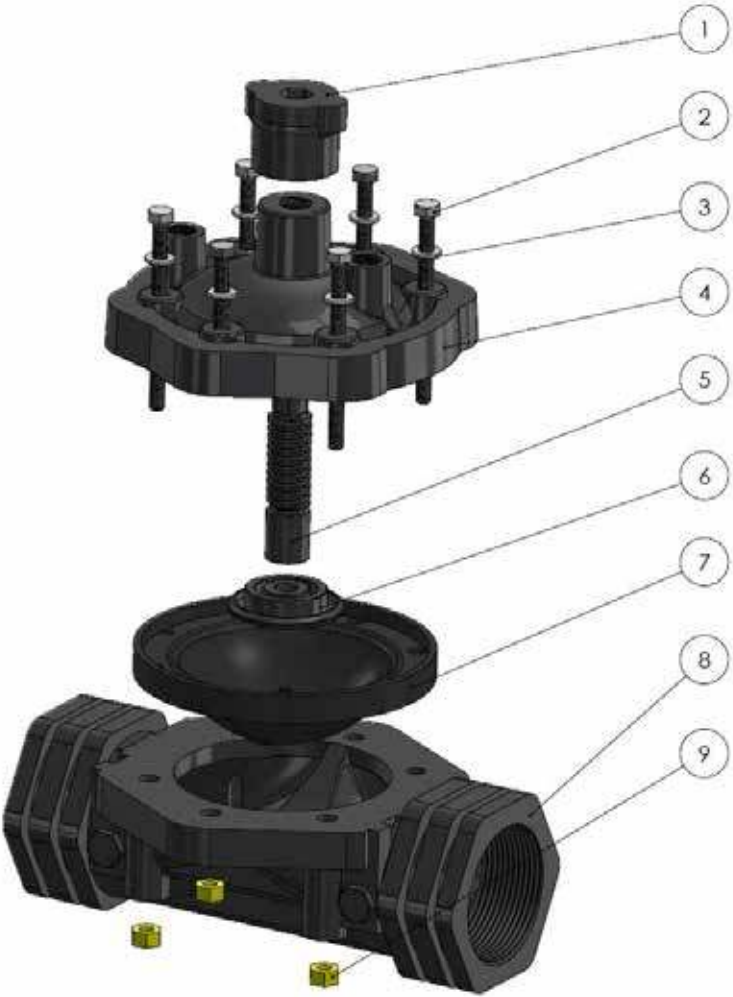

The flow rate in the line can be reduced by means of the flow lever on the cover.

#	Material Name	Type of Material
1	Flow Cover	Polypropylene
2	Bolt	Stainless Steel
3	Rondela	Stainless Steel
4	Cover	GRP
5	Flow Shaft	Polypropylene
6	Spring Printing Stamp	Polypropylene
7	Diaphragm	Natural Rubber
8	Body	GRP
9	Nut	Rice

Available Diameters	
Gear	3/4"
	1"
	1 1/2"
	2"
	2 1/2"
	3"R
Flanged	3"L
	4"L
	DN80
Angle Gear	DN100
	2"
	2 1/2"
	3"
Angle Flange	DN80
	DN100

HYDRAULIC CONTROL VALVES


Plastic

2 Way Solenoid Usage


It is controlled by a 2-way solenoid valve connected to the main valve. The normally closed valve switches to the open position when signalled or manually intervened

41


Valve Opening Mode

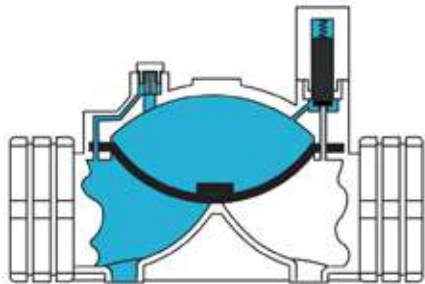

Valve Closing Mode

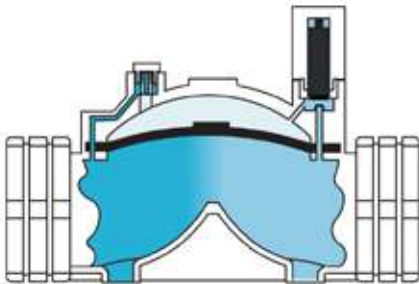

Pressure Loss Table

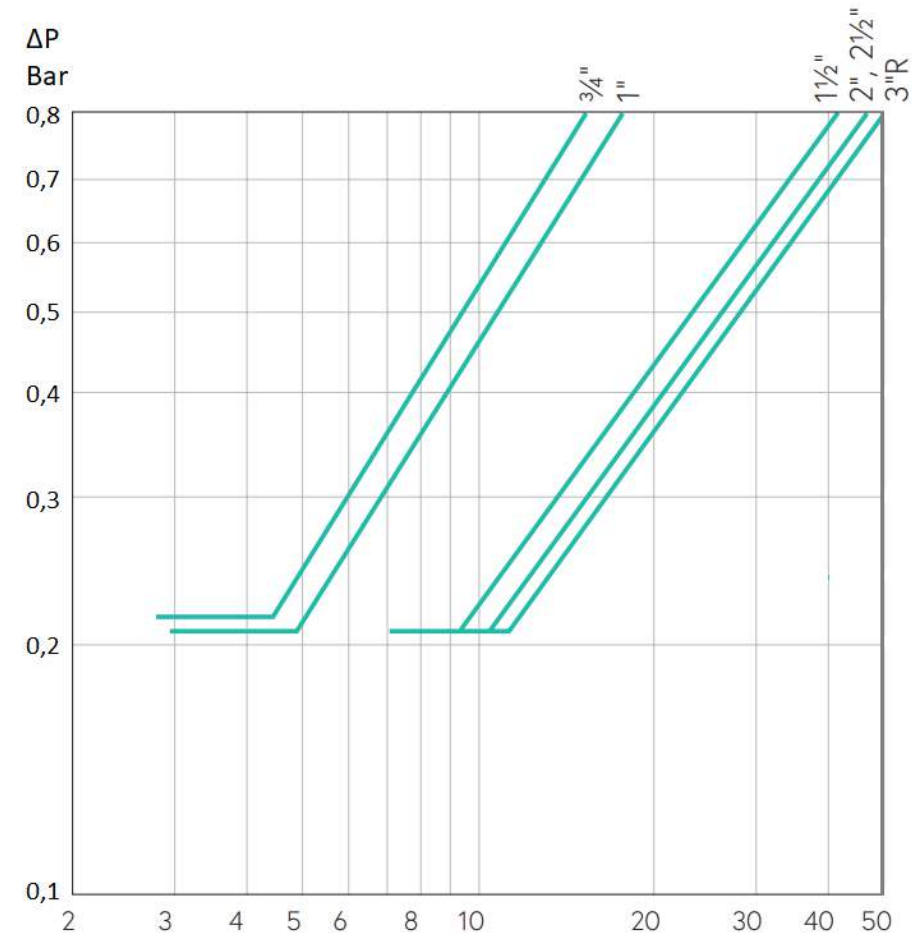

PRESSURE REDUCING SOLENOID CONTROL VALVE



Solenoid Controlled Pressure Reducing Control Valve is a hydraulic control valve that reduces the input pressure value to the desired pressure value. The control of the main valve is effected by solenoid coils mounted on it. The solenoid valve is provided with an electrical signal, a control device, a time relay, a switch, a PLC control unit, and control equipment. Thus, automation and control in application systems are easily achieved.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" – 2" – 2 1/2" – 3"R – 3"-4"
DN80 – DN100 – DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure..... bar
Desired outlet pressure value..... bar
Electric voltage value to be used..... volt

PRESSURE REDUCING CONTROL VALVE

Plastic

Pressure Reducing Control Valves are hydraulic control valves that reduce the input pressure value to the desired pressure value by means of a pressure reducer pilot mounted on it. The pressure reducer control valve constantly controls the output pressure value to be set without being influenced by the flow rate and inlet pressure values. When there is no flow in the system, the valve closes itself. When the valve inlet pressure value in the system falls below the set outlet pressure value, the valve opens itself. The valve can be used in horizontal or vertical position on the system.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" – 2" – 2 1/2" – 3"R – 3"-4"
DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure..... bar
Desired outlet pressure value..... bar



PRESSURE REDUCING & SUSTAINING CONTROL VALVE

The Pressure Reducing and Sustaining Control Valve is the control valve that reduces the output pressure to the desired value by holding the input pressure. There are two pilots on the valve. The pilot in the inlet direction is the pressure stabilization pilot and fixes the inlet pressure. The other pilot ensures that the pressure reducer remains constant by reducing the pilot pressure and the output pressure to the desired value. The pressure reducing and stabilizing control valve allows the system to operate at normal values by reducing excessive flow in the downward slope direction and lowering the high pressure. The valve keeps constantly controlling the inlet pressure and outlet pressure without being influenced by the flow rate changes.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" - 2" - 2 1/2" - 3"R - 3"-4"
DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Minimum valve inlet pressure..... bar
Desired outlet pressure value..... bar
Desired valve inlet pressure bar



QUICK PRESSURE RELIEF CONTROL VALVE

Plastic

The Quick Pressure Relief Control Valve is the safety control valve designed to protect system by releasing pressure surges to atmosphere quickly caused from sudden changes in water speed because pumps put into/ out of service frequently in water network elevation lines. When network pressure goes beyond set point, valve opens by itself quickly and protects system by releasing over pressure. When line pressure decreases to normal level, it is closed slowly and automatically as wholly sealed without causing surge.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" – 2" – 2 1/2" – 3"R – 3"-4"
DN80 – DN100 – DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Desired valve inlet pressure bar





The Solenoid Controlled Valve is the hydraulic control valve operated by line pressure and designed to ensure opening/closing process by means of built-in 3/2-way solenoid pilot valves controlled remotely with electric signal. Electric signal for solenoid pilot valves is ensured by means of a control device, time relay, main switch and PLC control units etc. Opening/Closing process may be realized easily thanks to manual control on solenoid pilot valve. Depending on desire, 24V AC 50Hz/60Hz or 12V DC, 9V DCLATCH and 12V DC latch normally open (N.O.) or normally closed (N.C.) solenoid coils may be used on main valve.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" - 2" - 2 1/2" - 3"R - 3"-4"
DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Electric voltage value to be used volt



PRESSURE SUSTAINING CONTROL VALVE

Plastic



Pressure Sustaining Control Valve is a hydraulic control valve designed to protect the system by rapidly discharging the high pressure wave by sudden opening movement in water systems with excessive pressure increase. With the pilot on the valve, the input pressure is adjusted with the desired pressure. If for any reason the inlet pressure in the system rises above the set value, the valve is opened quickly to release the excess pressure to the outside and the system is protected. Despite its sudden opening, due to the hydraulic principle of operation, the closing of the valve is slowed down so as not to create a ripple. It provides a completely leak-tight seal. It can also be used as a safety and warning valve at the exit points of the pressure reducing control valves alone at critical points in the water system.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" – 2" – 2 1/2" – 3"R – 3"-4"
DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type
Maximum valve inlet pressure bar
Desired valve inlet pressure bar



FLOAT LEVEL CONTROL VALVE

The Float Level Control Valve is the hydraulic control valve designed to control water level in reservoirs and tanks continuously. Main valve is controlled by 2-way modulating type float pilot valve manually. Main valve mounted on reservoir and tank upstream is closed as fully sealed without causing surge when water level reaches to maximum level. Valve opening/closing speed may be adjusted in set value. It may be used in the system by mounting horizontal or vertical positions.

Pressure Range: PN 10
Diameters : 3/4" 1"-1 1/2" - 2" - 2 1/2" - 3"R - 3"-4"
DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type



MANUALLY CONTROLLED VALVE

Plastic



Manually Controlled Valves are hydraulic control valves which are operated by line pressure and provide 3-way mini valves for on-off operation. The valve has a minimum opening pressure of 0.7 bar. Thanks to its flexible diaphragm, it performs an easy and quick check operation in high pressure applications and is shut off without impact.

Pressure Range: PN 10

Diameters : 3/4" 1"-1 1/2" - 2" - 2 1/2" - 3"R - 3"-4"

DN80 - DN100 - DN150 Flanged

Order Information

Please provide the following information in order

Maximum flow rate m³/h

Maximum mains / operating pressure bar

Main pipeline diameter mm

Valve connection type



TYPHOON Y Type Plastic Automatic Hydraulic Control Valves are designed in "Y" body model type, with high modulation capacity, to work with minimum pressure loss, cavitation and noise under difficult working conditions with high pressure differences.

TYPHOON Y Type Plastic Automatic Hydraulic Control Valves are close the flap with double chamber diaphragm actuator. It has double control chamber as standard. It can be used as a single chamber without using an extra control chamber. Through to the valve shaft, which is rigidly mounted on the valve body, it operates in a controlled and properly opens and closes fully sealed without causing impact.

TYPHOON Y Type Plastic Automatic Hydraulic Control Valves provide maximum performance under difficult conditions with glass reinforced nylon body structure. It is easy to assemble and disassemble with its simple and reliable structure. It has high chemical and corrosion resistance.

TYPHOON Y Type Automatic Hydraulic Control Valves can be obtained by adding various control equipments to the Basic valve body and valves that can make different tasks.

Order Information

Please provide the following information in order

Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type


Features

- Easy to use and maintain with its simple structure
- Lower costs
- Working in wide pressure range
- Perfect modulation even at low flow rates
- Impact-free opening and closing with flexible diaphragm
- Fully sealing with reinforced diaphragm and inner spring
- High diaphragm resistance
- Wide control application area with different pilot mounts
- Ability to work in horizontal and vertical positions



Y TYPE CONTROL VALVE


Plastic

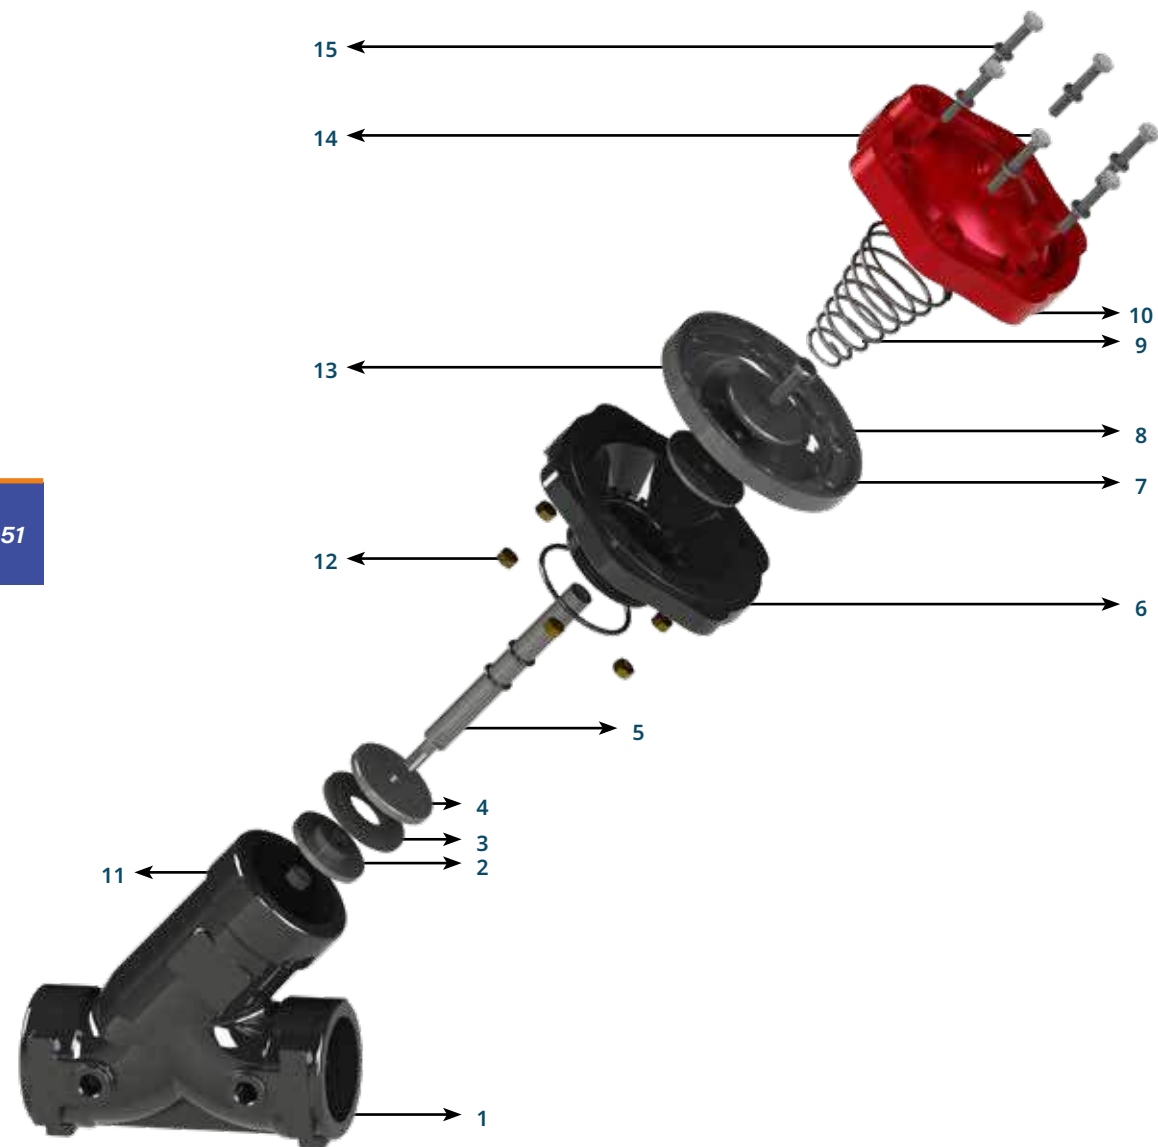

#	Material Name	Type Of Material
1	Body	Glass Fiber Reinforced Polyamide
2	Flap	Stainless Steel
3	Sealing Rubber	EPDM
4	Bowl	Stainless Steel
5	Shaft	Stainless Steel
6	Bottom Cover	Glass Fiber Reinforced Polyamide
7	Diaphragm	Natural Rubber
8	Diaphragm Support	Stainless Steel
9	Spring	Stainless Steel
10	Top Cover	Glass Fiber Reinforced Polyamide
11	Nut	Stainless Steel
12	Nut	Brass
13	Bolt	Stainless Steel
14	Bolt	Stainless Steel
15	Washer	Stainless Steel

Dimentions and Weights

DN		L		h		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	Lbs	Kg
2	50	6,49	165	1,49	38	8,86	225	3,86	1,75
3/4	20	5,31	135	1,02	26	5,23	133	2,09	0,95
1	25	5,31	135	1,02	26	5,23	133	2,20	1,00
1 1/4	32	5,31	135	1,14	29	5,23	133	2,31	1,05
1 1/2	40	8,78	165	1,49	38	8,86	225	3,86	1,75
2	50	6,49	165	1,49	38	8,86	255	3,86	1,75

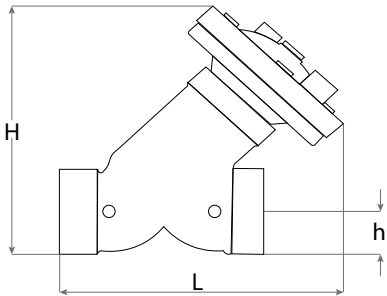


Working Temperature: Maximum 80°C
Working Pressure: Maximum 10 Bar




Y TYPE CONTROL VALVE

Plastic

Pressure Loss Chart

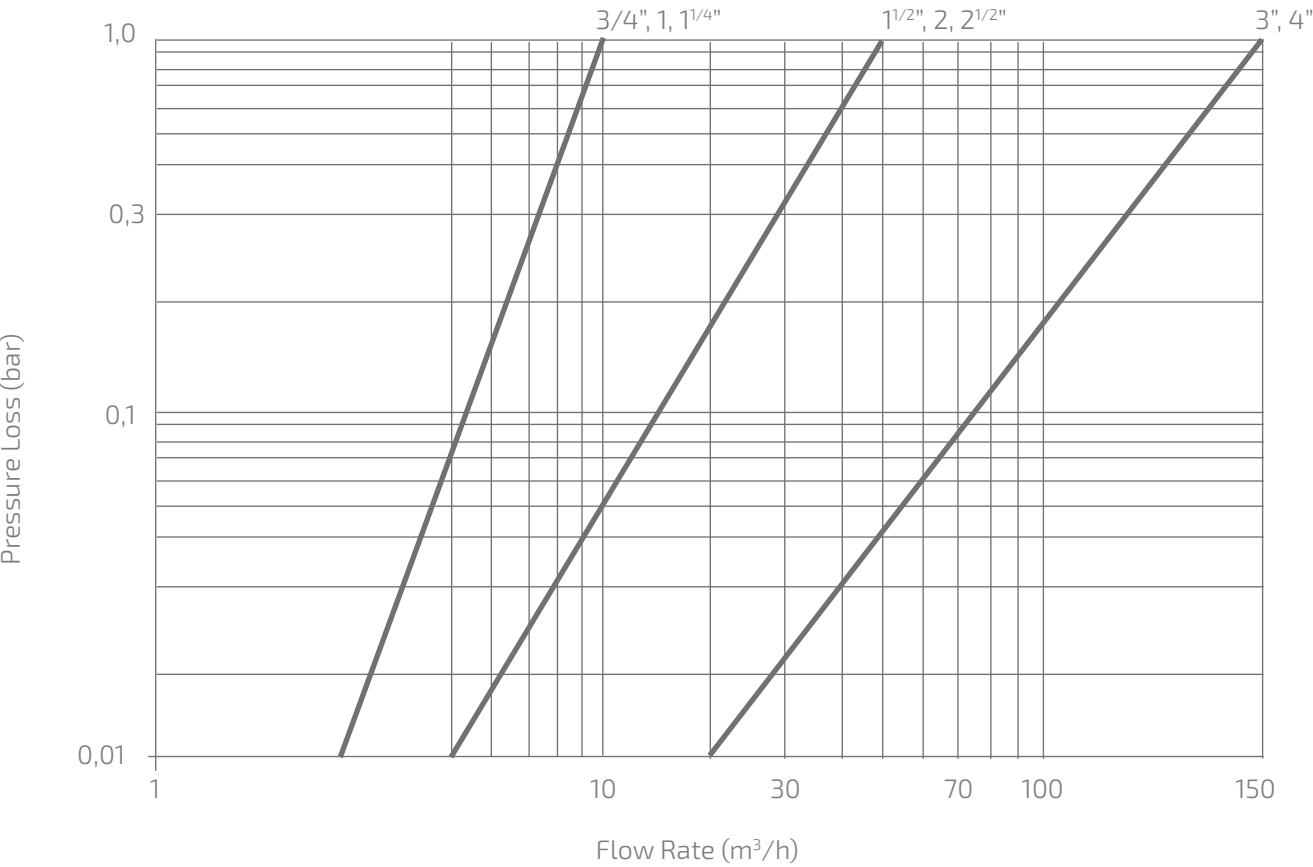

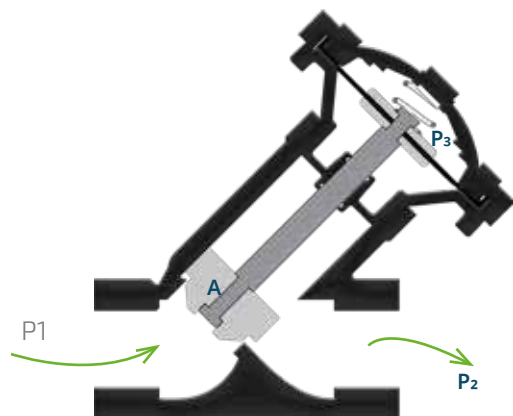

Working Principles

They are automatic control valves with double chamber diaphragm actuators, which are used to perform hydraulically desired operations with line pressure without the need for energy sources in the network line.

P1 : Inlet Pressure
P2 : Outlet Pressure
P3 : Actuator Pressure

P_{spring} : Spring Force
A : The Valve's Influence

Valve Closing Mode

When the pilots on the main control valve bring the inlet pressure (P1) above the diaphragm, the water creates hydraulic force. Though to this force, the valve flap fits into the body bushing and ensures the valve to be closed in a fully sealed manner.

If the forces are examined in closing mode ;

$$P_3 \times 3A + P_{spring} > P_1 \times A$$

Inequality is achieved. If there is no external influence on the area indicated by the P_3 pressure, the P_3 pressure will be equal to the maximum P_1 pressure.

Valve Opening Mode

The inlet pressure of the main control valve is provided to open the valve by overcoming the spring force that helps the closing process and the force created by the pressure P3 on the diaphragm.

If the forces are examined in opening mode ;

$$P_1 \times A > P_{spring} + P_3 \times 3A$$

Inequality is achieved. As the area indicated by the pressure P3 is evacuated, the differential pressure becomes 0. Thus, $P_1 \times A$ force is overcome by spring force and the valve is opened. Spring force determines the minimum opening pressure that enables the valve to open.


Modulation Mode

The pilots on the main control valve constantly control the pressure of the fluid and enable it to operate in modulation mode.

If the forces are examined in modulation mode ;

$$P_1 \times A + P_2 \times 3A = P_3 \times 3A + P_{spring} + P_2 \times A$$

Equality is achieved. The pilot valve, which enables the valve to operate in modulation mode, regulates the pressures of P_2 and P_3 , providing force equality. Thus, the valve operates in modulation mode.



Y TYPE CONTROL VALVE



Plastic - Serie 2



#	Material Name	Type Of Material
1	Flow Rate Clamp	Polypropylene
2	Bolt	Stainless Steel
3	Cover	GRP
4	Flow Shaft	Polypropylene
5	Aperture Support	Stainless Steel
6	Diaphragm	Natural Rubber
7	Mil	Stainless Steel
8	Bottom Cover	Polypropylene
9	Dish	Polypropylene
10	Sealing Rubber	EPDM
11	Body	GRP
12	Nut	Stainless Steel

55

Connection	DN		L		h		H	
	inch	mm	inch	mm	inch	mm	inch	mm
Threaded	3/4"	20	6,50	165	1,02	26,0	6,30	160
	1"	25	6,50	165	1,02	26,0	6,30	160
	1 1/4"	32	6,50	165	1,18	30,0	6,46	164
	1 1/2"	40	8,78	223	1,46	37,0	8,94	227
	2"	50	8,78	223	1,57	40,0	9,06	230
	2 1/2"	65	8,98	228	1,89	48,0	9,37	238
	3"	80	11,81	300	2,40	61,0	11,61	295
Flanged	4"	100	12,60	320	2,89	73,5	12,00	305
	2"	50	11,28	261	3,25	82,5	10,63	270
	2 1/2"	65	11,28	267	3,64	92,5	11,02	280
	3"	80	15,59	396	3,84	97,5	12,99	330
Victaulic	4"	100	15,59	396	4,47	113,5	13,62	346
	3"	80	11,81	300	2,05	52,0	11,22	285
	4"	100	11,81	300	2,26	57,5	11,42	290

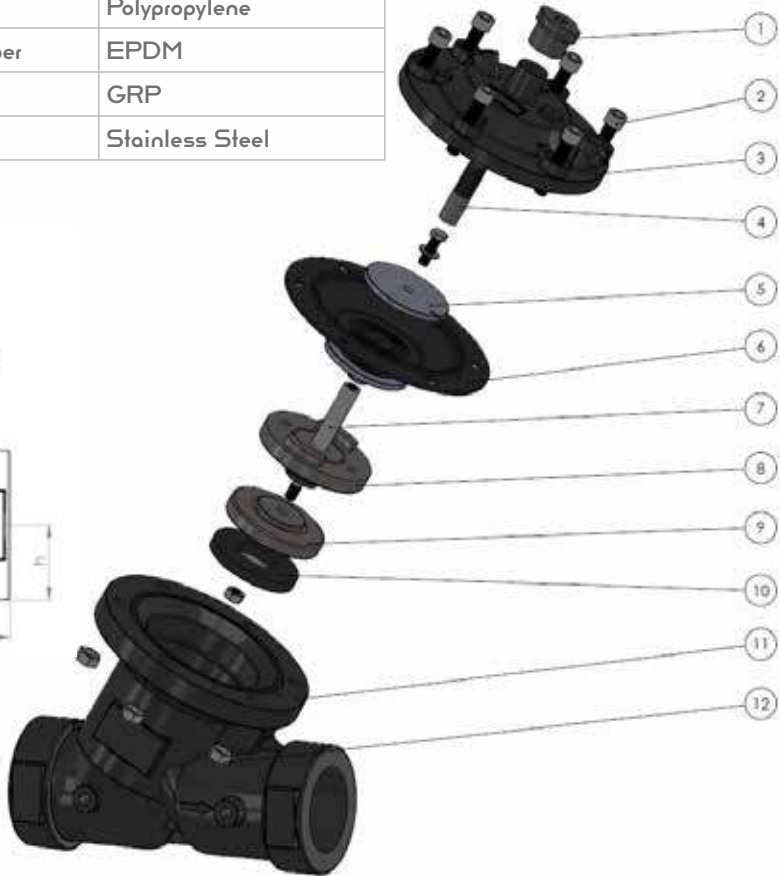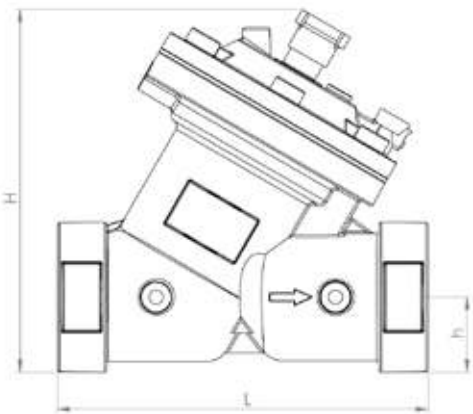


Foot Valve is used to prevent back flow that occurs when the pump is turned off. It reacts quickly with its flap system. It provides a silent, non-impact and leak-proof closure.

With its filter function, it prevents the entry of foreign / harmful particles into the system and prevents the parts inside from being damaged.

Order Information

Please provide the following information in order



Maximum flow rate m³/h
Maximum mains / operating pressure bar
Main pipeline diameter mm

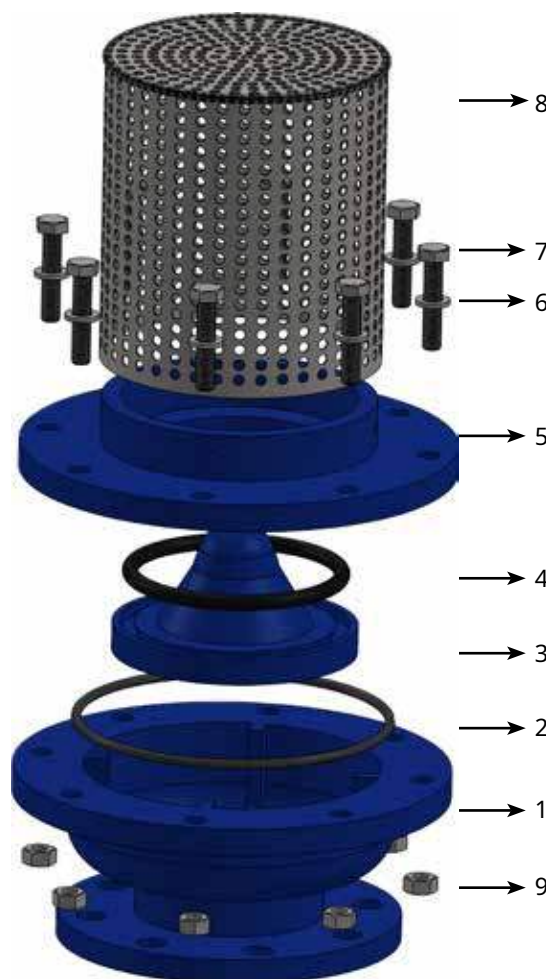

#	Material Name	Type of Material
1	Body	GGG40
2	Oring	NBR
3	Flap	GGG40
4	Oring	NBR
5	Cover	GGG40
6	Washer	8.8 Coated Steel
7	Bolt	8.8 Coated Steel
8	Filter	AISI 302
9	Nut	8.8 Coated Steel

FOOT VALVE

Sizes										Weight	
DN		D		D1		D2		H			
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2	50	6,50	165	9,84	250	7,24	184	10,98	279	38,39	17,45
2 1/2	65	7,28	185	9,84	250	7,24	184	10,98	279	41,25	18,75
3	80	7,87	200	11,02	280	8,58	218	13,11	333	51,59	23,45
4	100	8,66	220	11,02	280	8,58	218	13,11	333	51,92	23,60
5	125	9,84	250	12,60	320	10,00	254	14,09	358	72,38	32,90
6	150	11,22	285	13,39	340	10,79	274	15,67	398	98,34	44,70
8	200	13,39	340	16,14	410	13,07	332	20,47	520	165,00	75,00
10	250	15,94	405	18,11	460	13,86	352	21,89	556	209,00	95,00
12	300	18,11	460	20,47	520	15,98	406	25,83	656	240,24	109,20
16	400	22,83	580	25,20	640	20,87	530	28,58	726	374,00	170,00
20	500	28,15	715	30,51	775	20,87	530	30,31	770	583	265,00

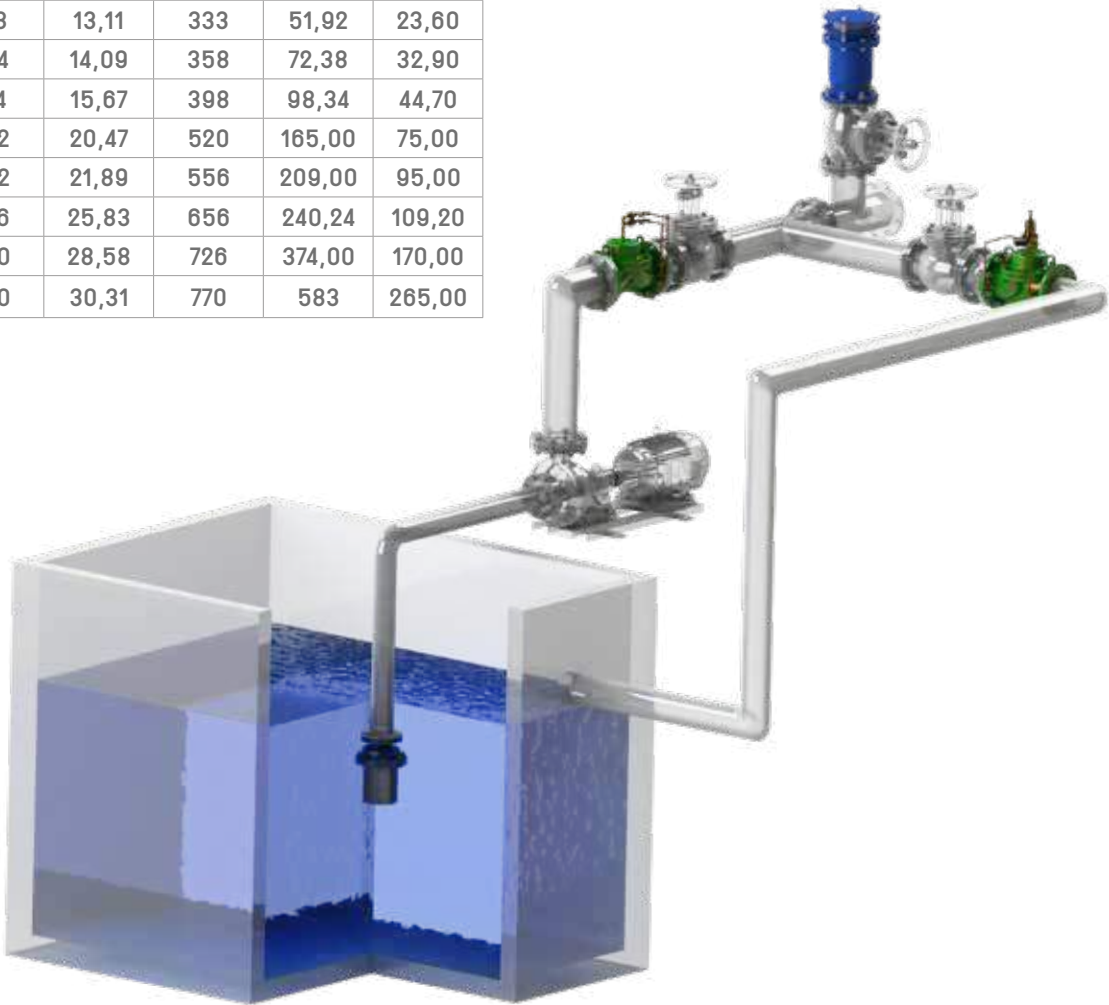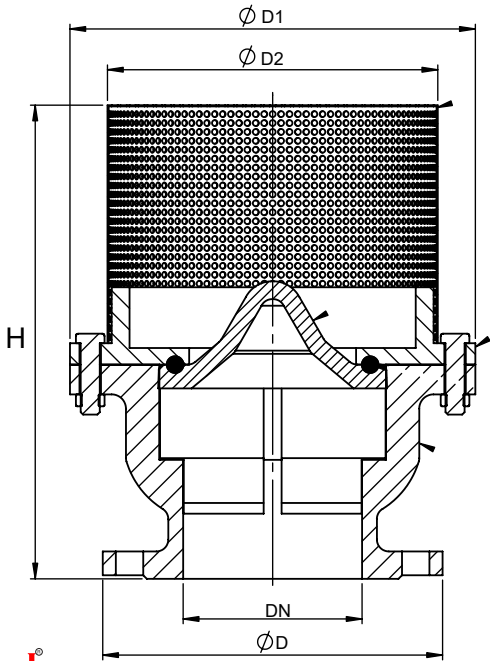

It is called the Air Valve which determines the air - water balance in the system. During the filling of the pipeline; The air in the line evacuates the air in the system quickly. Due to various reasons, it allows small quantities of air to accumulate in the pipeline during operation, under pressure.

During the evacuation of the pipeline, air is sucked into the pipe to prevent vacuum formation, and cavitation hazards are prevented by balancing the system pressure with the atmospheric pressure.

Plastic Air Valves are three types;

1. Single Effect (Kinetic) Plastic Air Valve ½" - ¾" - 1" and 2"
2. Double Effect (Automatic) Plastic Air Valve ½" - ¾" and 1"
3. Tripple Effect (Combination) Plastic Air Valve 2"

Order Information

Please provide the following information in order

Maximum mains / operating pressure bar


Main pipeline diameter mm

Valve connection type



Plastic Air Valves Usage Locations;

1. In agricultural irrigation, (every 400-500 mt on straight lines on the main line, at the beginning of the slope, 400-500 mt at the upward inclines at the peak points, before the beginning of the deflection and before the end of the line and before the irrigation valve (At the points indicated in the figure)
2. In filtration systems, (Disc Filter, Hydrocyclone, Gravel Tank, Automatic Horizontal Filters, etc.).
3. Factory installations in industrial areas, In treatment systems and so on.

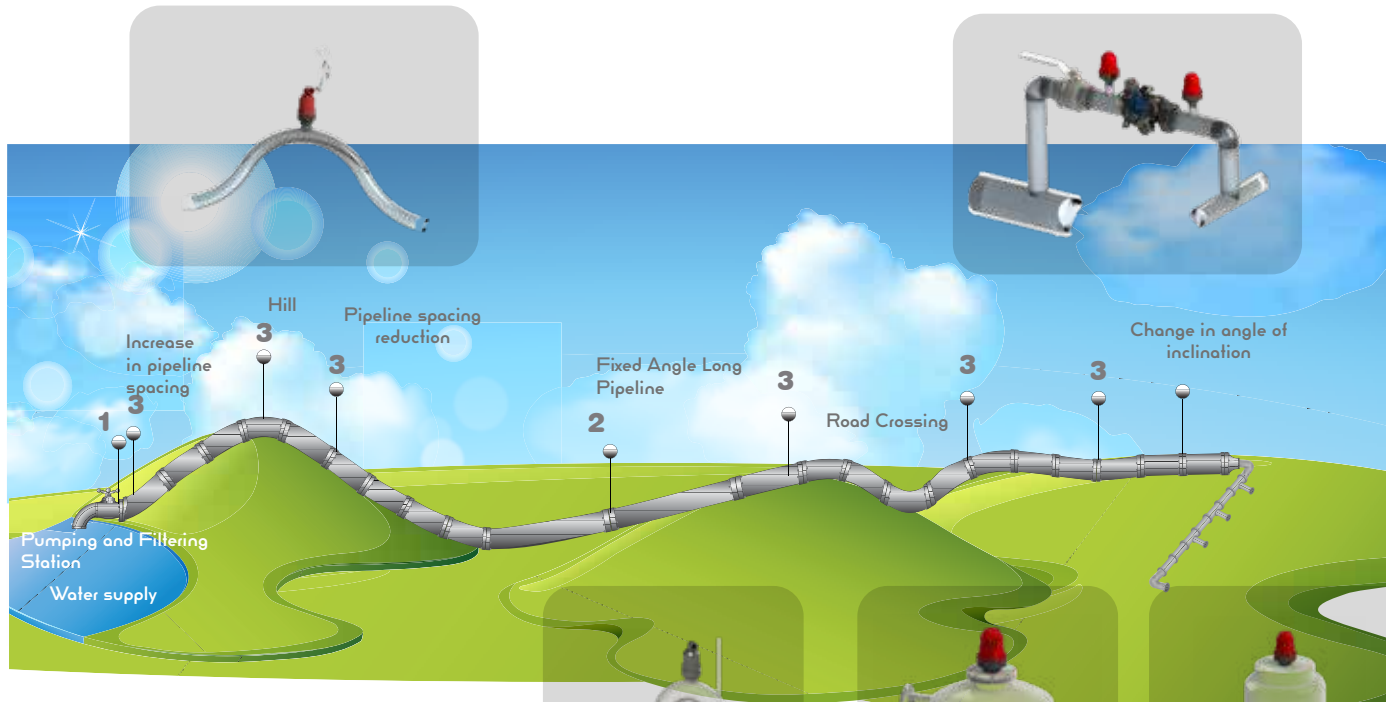

Models

1. Single Effect (Kinetic) Air Valves
2. Double Effect (Automatic) Air Valves
3. Tripple Effect (Combination) Air Valves



Hydrasyclon




Gravel Tank



Disk Filter System

DOUBLE EFFECT (Automatic) AIR VALVES

1/2" - 3/4" - 1" Double Effect (Automatic) Air Valve

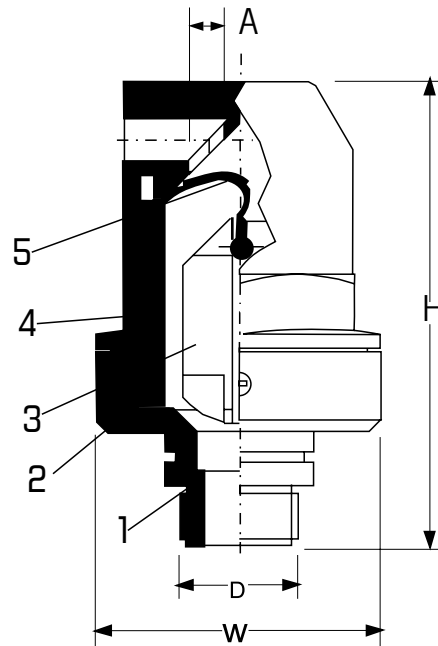

#	Material Name	Type Of Material
1	Body	Glass Reinforced polyamide
2	O-Ring	NBR
3	Float	Polipropen
4	Cover	Glass Reinforced polyamide
5	Float Tire	EPDM

#	Unit	1/2"	3/4"	1"
H	Height (mm)	112	112,75	136,57
W	Width (mm)	58,88	58,88	85,65
D	Connection Diameter	1/2" BSP	3/4" BSP	1" BSP
A	Evacuation Mouthpiece	25mm2	25mm2	25mm2
-	Weight (kg)	0,140	0,141	0,304




TRIPPLE EFFECT (Combination) AIR VALVES

2" Tripple Effect (Combination) Air Valve

#	Material Name	Type Of Material
1	Body	Glass Reinforced polyamide
2	O-Ring	NBR
3	Cover	Glass Reinforced polyamide
4	Float	Polipropen
5	Fork Rubber	EPDM
6	Float Fork	Glass Reinforced polyamide
7	Float Seal	EPDM


#	Unit	2"
H	Height (mm)	243
W	Width (mm)	103
D	Connection Diameter	2" BSP
a	Evacuation Mouthpiece	7mm2
-	Weight (kg)	0,695
A	Kinetic Nozzle Area	855mm2

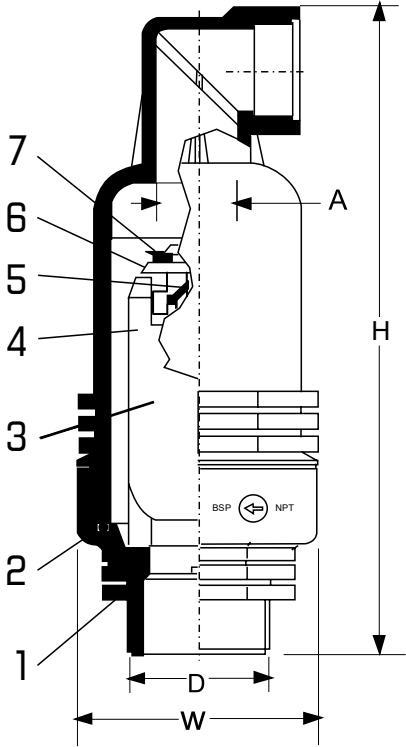

Discharge Mode

Open Position

Provides rapid evacuation of the high amount of air in the pipeline from the system during the first start of the system

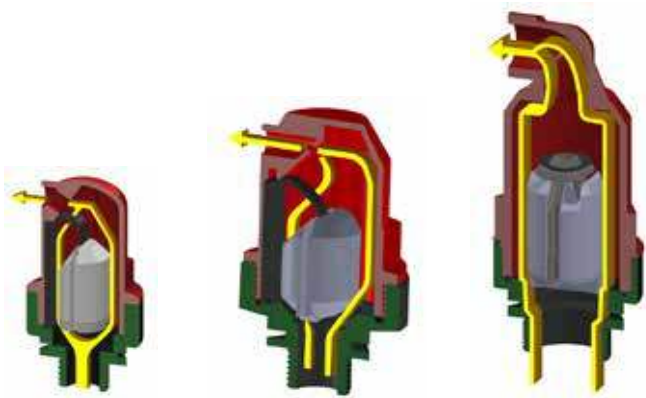

Closed Position


When the water reaches the air valve, the float lifts up and closes the outlet of the air valve



Pressure Stabilization Mode


Open Position

During drawing or evacuating the water from the pipeline. The pressure in the line is lower than atmospheric pressure. This condition called vacuum effect, and its causes collapse and cavitation damage in pipes. The float goes down (Open position) and avoids this problem by letting air flow from the outside to the pipeline.

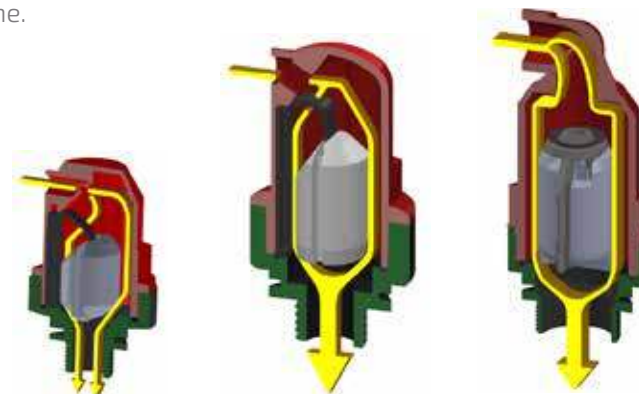

Closed Position


When the system is in service, that is, when the pipeline is under pressure, the low amount of air is dragged with water and collected in certain places such as high parts of the line. The high pressure accumulated air is evacuated with water and the float is partially opened (Modulation position). After evacuation, the float rises again and closes the air valve outlet (Closed position).

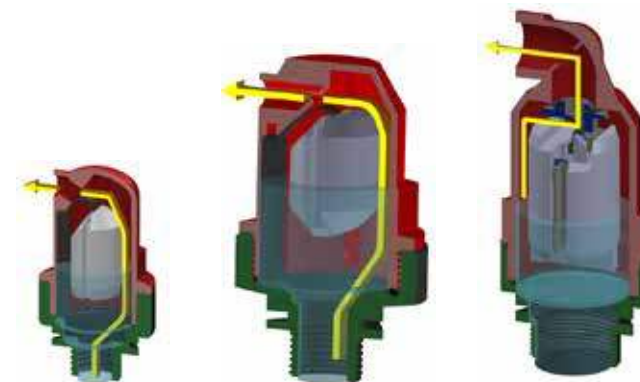


2" Tripple Effect (Combination) Air Valve

1/2" - 3/4" - 1" Double Effect (Automatic) Air Valve


■ Air intake

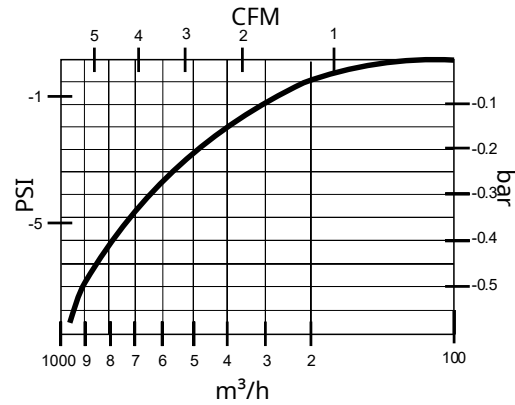


■ Air Discharge

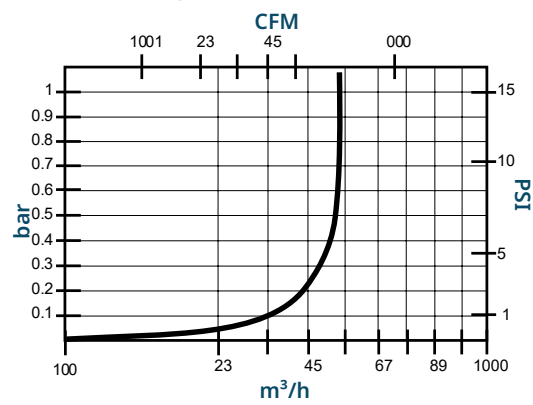


■ Air intake

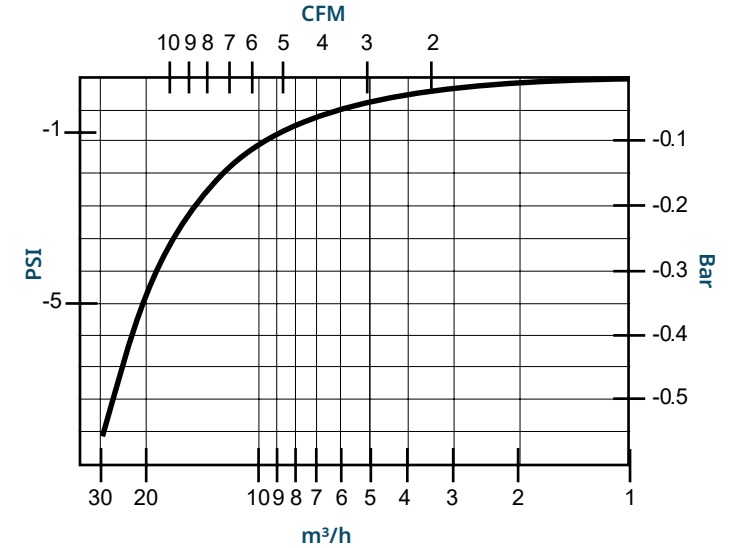

■ Air Discharge

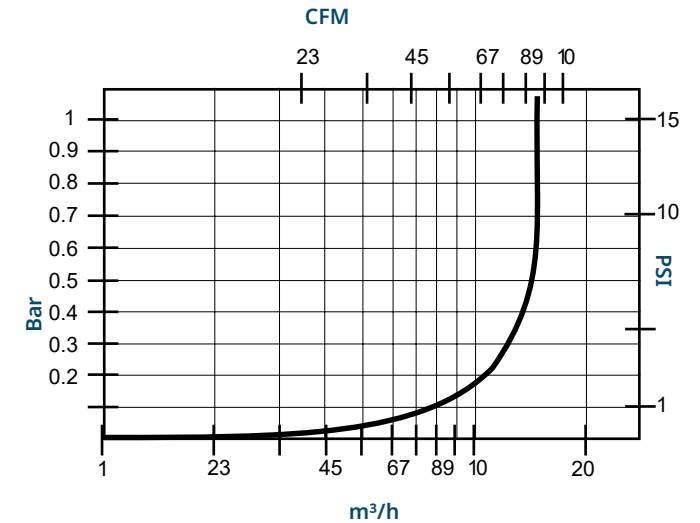


■ Air Discharge -Automatic Valve

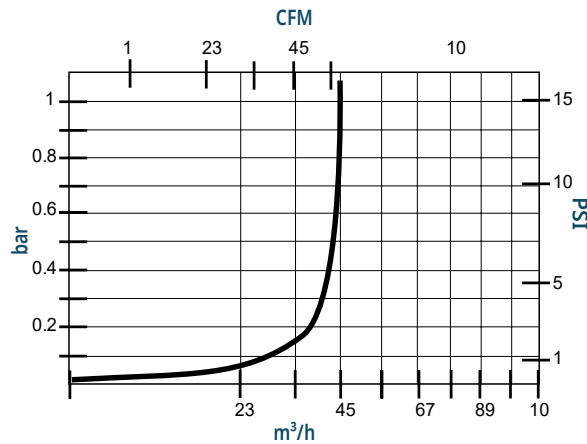

SINGLE EFFECT (KINETIC)
AIR VALVES

1/2" - 3/4" - 1" Single Effect (Kinetic) Air Valve

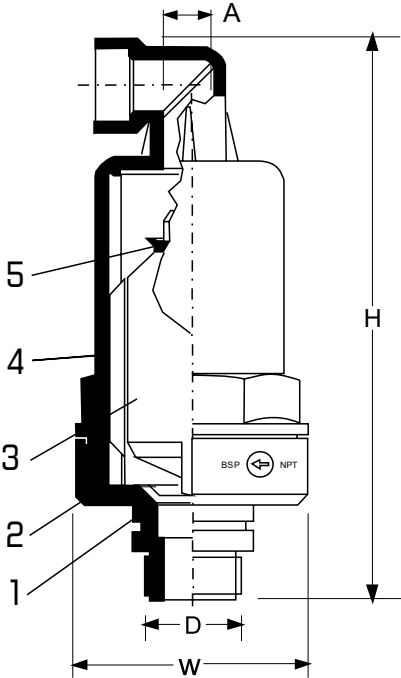

#	Material Name	Type of Material
1	Body	Glass Reinforced polyamide
2	O-Ring	NBR
3	Float	Polipropylene
4	Cover	Glass Reinforced polyamide
5	Float Tire	EPDM

#	Unit	1/2"	3/4"	1"
H	Height (mm)	111,98	112,12	191,60
W	Width (mm)	58,88	58,88	85,65
D	Connection Diameter	1/2"BSP	3/4"BSP	1"BSP
A	Evacuation mouthplace	314 mm2	314 mm2	314 mm2
-	Weight (kg)	0,138	0,141	0,364




SINGLE EFFECT (KINETIC) AIR VALVES

2" Single Effect (Kinetic) Air Valve

#	Material Name	Type of Material
1	Body	Glass Reinforced polyamide
2	O-Ring	NBR
3	Float	Polipropylene
4	Cover	Glass Reinforced polyamide
5	Float Tire	EPDM


#	Unit	2"
H	Height (mm)	243
W	Width (mm)	103
D	Connection Diameter	2"BSP
A	Evacuation mouthplace	855 mm2
-	Weight (kg)	0,672

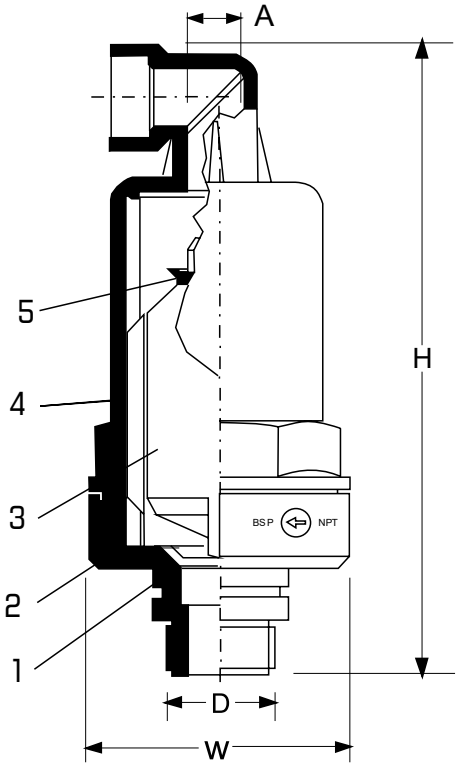

Discharge Mode


Open Position

Provides rapid evacuation of the high amount of air in the pipeline from the system during the first start of the system

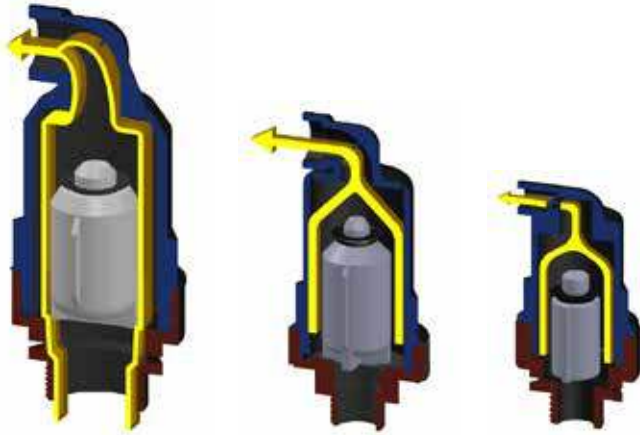

Closed Position


When the water reaches the air valve, the float lifts up and closes the outlet of the air valve

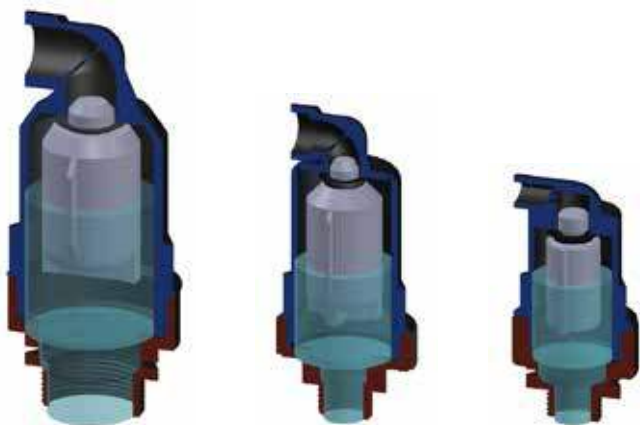

Pressure Stabilization Mode


Open Position

During drawing or evacuating the water from the pipeline. The pressure in the line is lower than atmospheric pressure. This condition called vacuum effect, and its causes collapse and cavitation damage in pipes. The float goes down (Open position) and avoids this problem by letting air flow from the outside to the pipeline.



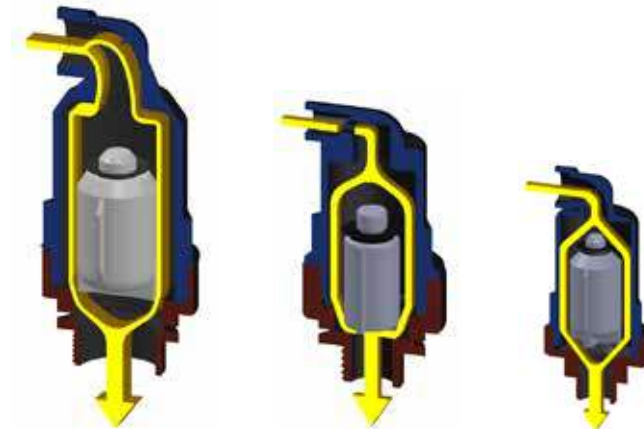


AIR VALVES

2" Single Effect (Kinetic) Air Valve

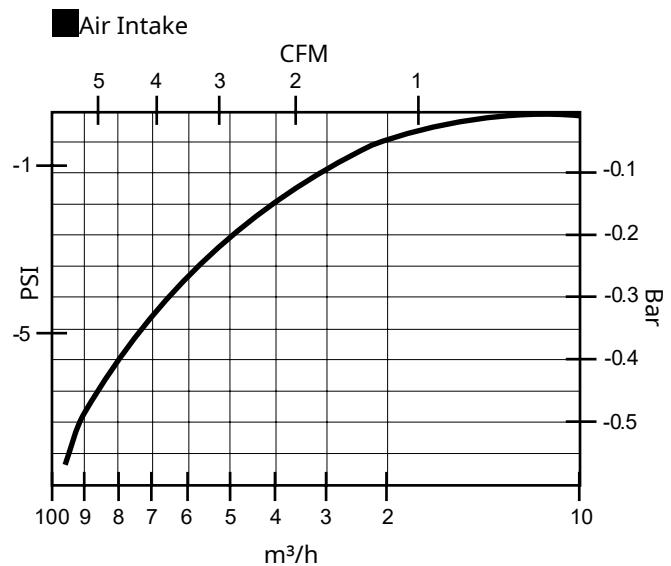

1/2" - 3/4" - 1" Single Effect (Kinetic) Air Valve

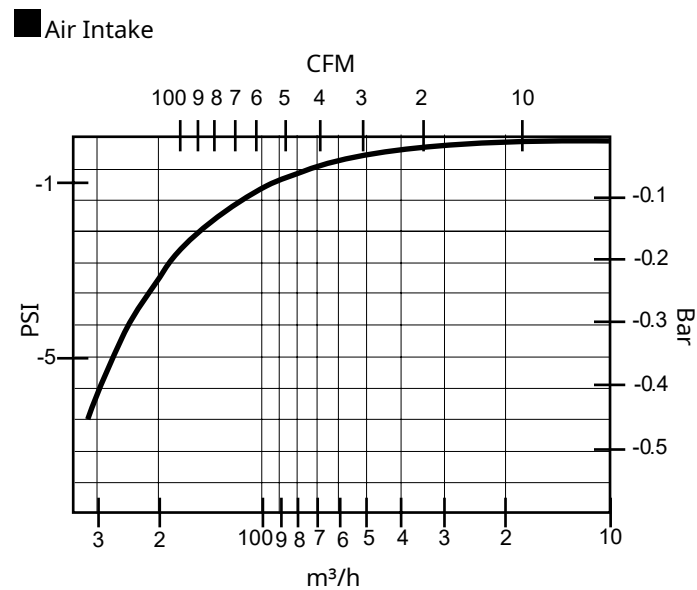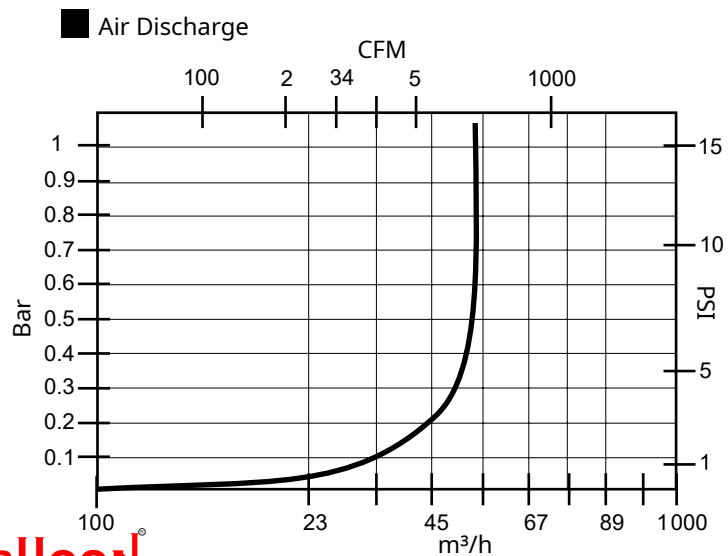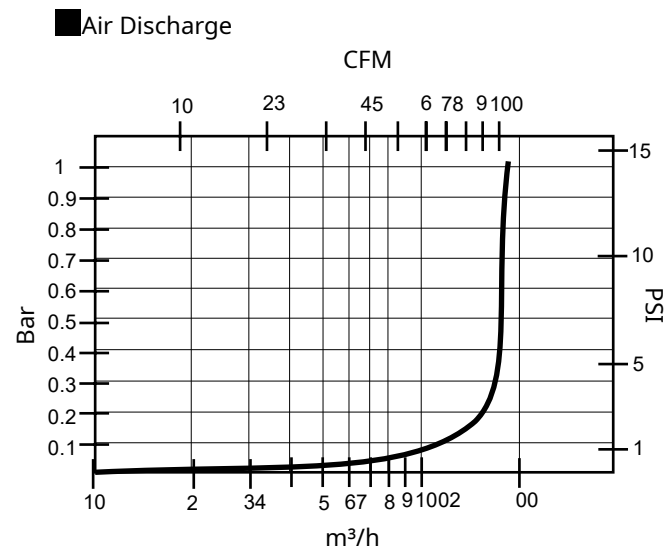

NON SLAM DYNAMIC AIR RELEASE VALVES

In a Non Slam Dynamic Air Release Valve; Air and water situated in the suction pipe begins to move at a high speed. When the water reaches the air release valve at a high speed the valve will suddenly close which will cause an impact on the system. Non slam dynamic air valves slow down the high speed evacuation gradually. It does not reflect this problem on to the system.

In the case of a column break, the water columns are separated from each other to create a low pressure between them. During this time, the air sucks in high volume in normal suction cups.

However, in our suction cup, there is a non-impact suction such as a pulse. Thus, moments are reduced while the columns are separated from each other. The momentum is lost and the columns return again. Standard suction cups will blow air out quickly. Thus, the collision speed and impact of the columns increase. Unwrapped opening and closing suspends the water columns and reduces the energy of the columns as a pillow acts as the columns are opened and closed with some vacuum and air remaining. This solves the pulse problem


Order Information

Please provide the following information in order

Maximum mains / operating pressure bar
Main pipeline diameter mm
Valve connection type




#	Material Name	Type of Material
1	Top Cover	ST-37
2	Cover	ST-37
3	Top Body	GGG40
4	Stud Bolt	8.8 Stainless Steel
5	Valve	Stainless Steel
6	Nut	8.8 Stainless Steel
7	Body	GGG40
8	Filter	Stainless Steel
9	3rd Float	HDPE
10	Bolt	8.8 Stainless Steel
11	2nd Float	HDPE
12	1st Float	HDPE
13	Washer	Stainless Steel

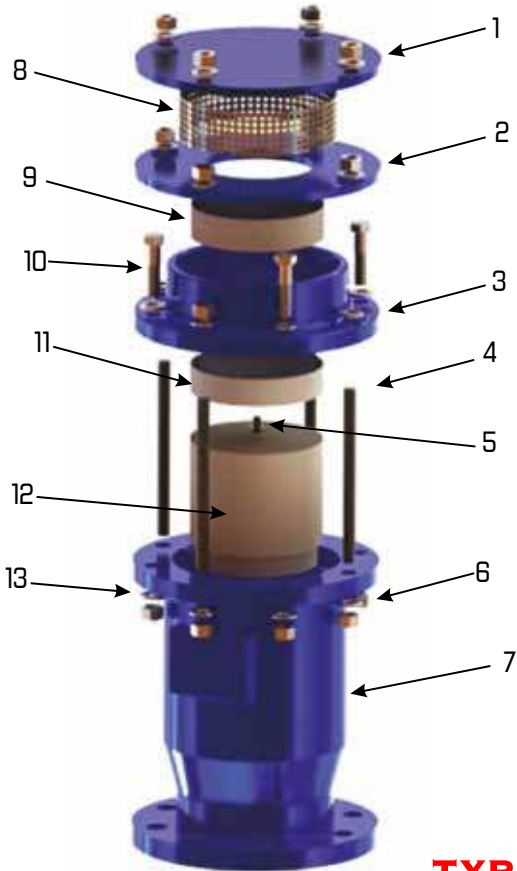


NON SLAM DYNAMIC AIR RELEASE VALVES

Nominal Air Release Capacity of Non-Pulse Dynamic Air Release Valve

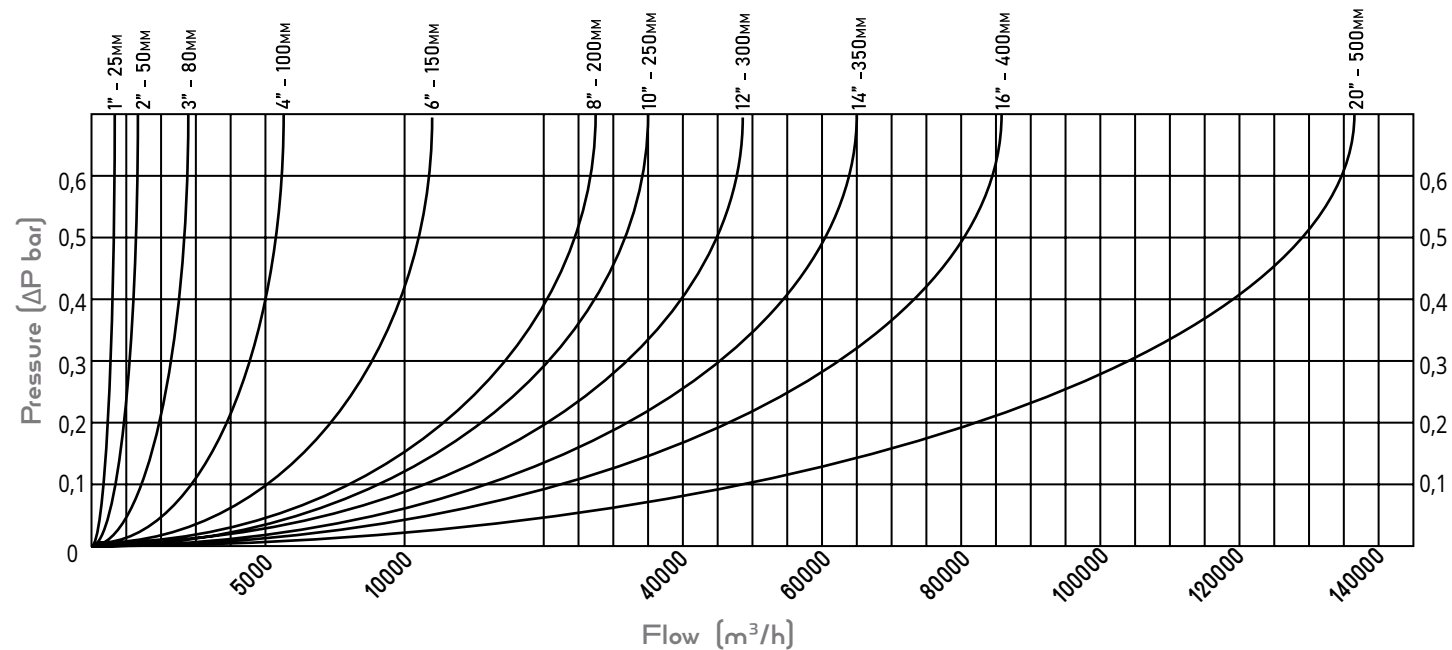


Nominal Air Intake Capacity of Non-Pulse Dynamic Air Relief Valve

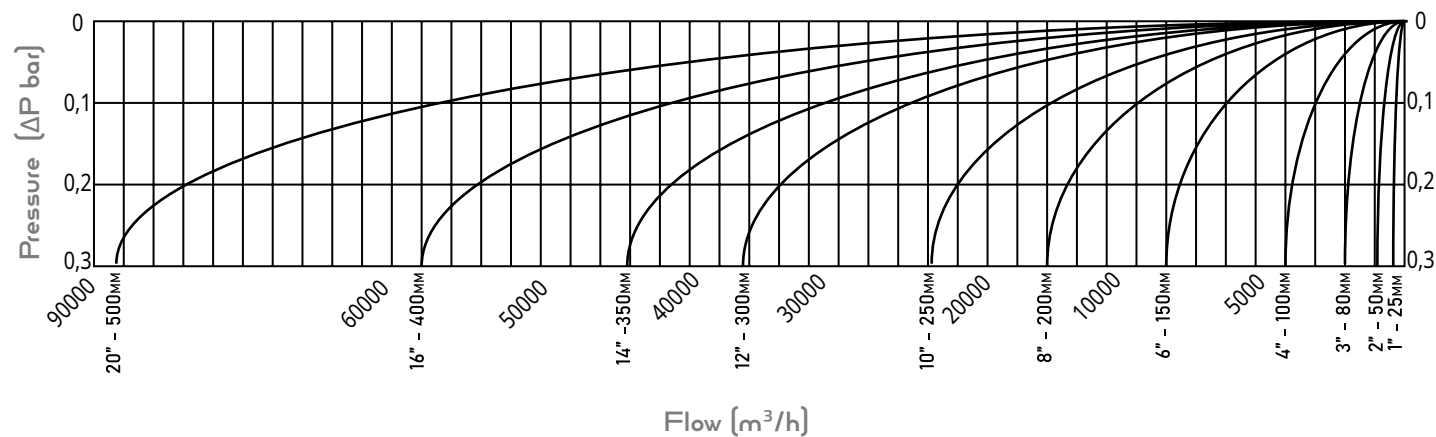

NON SLAM DYNAMIC AIR RELEASE VALVES


Flanged

DN		D		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2	50	6,50	165	8,11	206	12,91	328	32,30	14,650
2 1/2	65	7,28	185	8,11	206	12,91	328	33,00	14,950
3	80	7,87	200	9,45	240	14,88	378	47,40	21,500
4	100	8,66	220	10,24	260	15,75	400	57,20	25,950
6	150	11,22	285	11,81	300	17,68	449	100,50	45,600
8	200	13,39	340	11,81	300	18,03	458	132,60	60,150
10	250	15,95	405	17,91	455	24,88	632	271,20	123,000
12	300	18,11	460	18,70	475	25,20	640	436,80	198,150

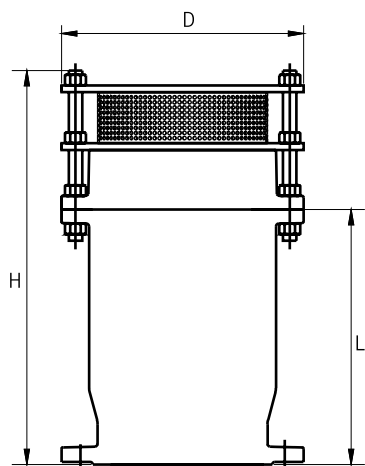

Threaded

DN		D		H		Weight	
inch	mm	inch	mm	inch	mm	lbs	kg
1"	25	4,50	115	10,16	258	12,10	5,50
1 1/2"	40	4,50	115	10,16	258	13,23	6,00
2"	50	6,50	165	13,80	350	27,60	12,50



Full Open

Allows air to be absorbed or discarded at low pressure differentials



Air Release

System air bubbles Away from the system.



Non Slam Closed

High air pumping slows down intake and suction speeds.



Full Closed

System is sealed Fully closed when running It happens

1" SINGLE CHAMBER & SINGLE FUNCTION AIR VALVES

The 1" Air Release Valves are designed to perform single specified function:

The Discharge of pressurized air pockets during the operation.

The 1" Air Valves that are installed especially in the pump stations decrease overall pumping costs by discharging small pressurized air pockets that are slowing down the water flow.

Order Information

Please provide the following information in order

Maximum mains / operating pressure bar


Main pipeline diameter mm

Valve connection type

71



#	Material Name	Type of Material
1	Flanged	GGG40
2	Body	GGG40
3	O-Ring	NBR
4	Floater Ball	HDPE
5	Floater Pin	Brass
6	Orifice	Brass
7	Sealed Rubber	EPDM
8	Cover	GGG40
9	Inbus Bolt	Brass
10	Bolt	Stainless Steel

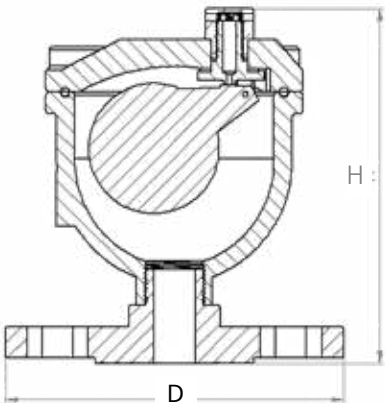

Size (inch - DN)		D		H		Weight
		PN 10/16 inch	PN 10/16 mm	PN10/16 inch	PN10/16 mm	
1"	Threaded	5,59	142	6,456	164,0	6,38
DN40	Flanged	5,91	150	7,697	195,5	7,00
DN50	Flanged	6,50	165	7,697	195,5	7,50
DN65	Flanged	7,28	185	7,697	195,5	9,70
DN80	Flanged	7,87	200	7,697	195,5	10,00
DN100	Flanged	8,66	220	7,697	195,5	11,00
DN150	Flanged	11,22	285	7,697	195,5	13,00

DOUBLE CHAMBER AIR RELEASE VALVES



Order Information


Please provide the following information in order

Maximum mains / operating pressure bar

Main pipeline diameter mm


Valve connection type

#	Material Name	Type of Material
1	Body	GGG40
2	Side Cover	GGG40
3	Washer	Stainless Steel
4	Nut	Stainless Steel
5	Floater Pin	Brass
6	Orifices	Brass
7	Sealed Rubber	EPDM
8	Orifice Cover	Brass
9	Floater Ball	PE-ABS-PC
10	Nut	Stainless Steel
11	Floater	Polietilen 6
12	O-Ring	NBR
13	O-Ring	NBR
14	Bottom Sheet	ST37
15	Filter	AIS 302
16	Top Sheet	ST37
17	Stud Bolt	Stainless Steel
18	Blind Nut	Stainless Steel

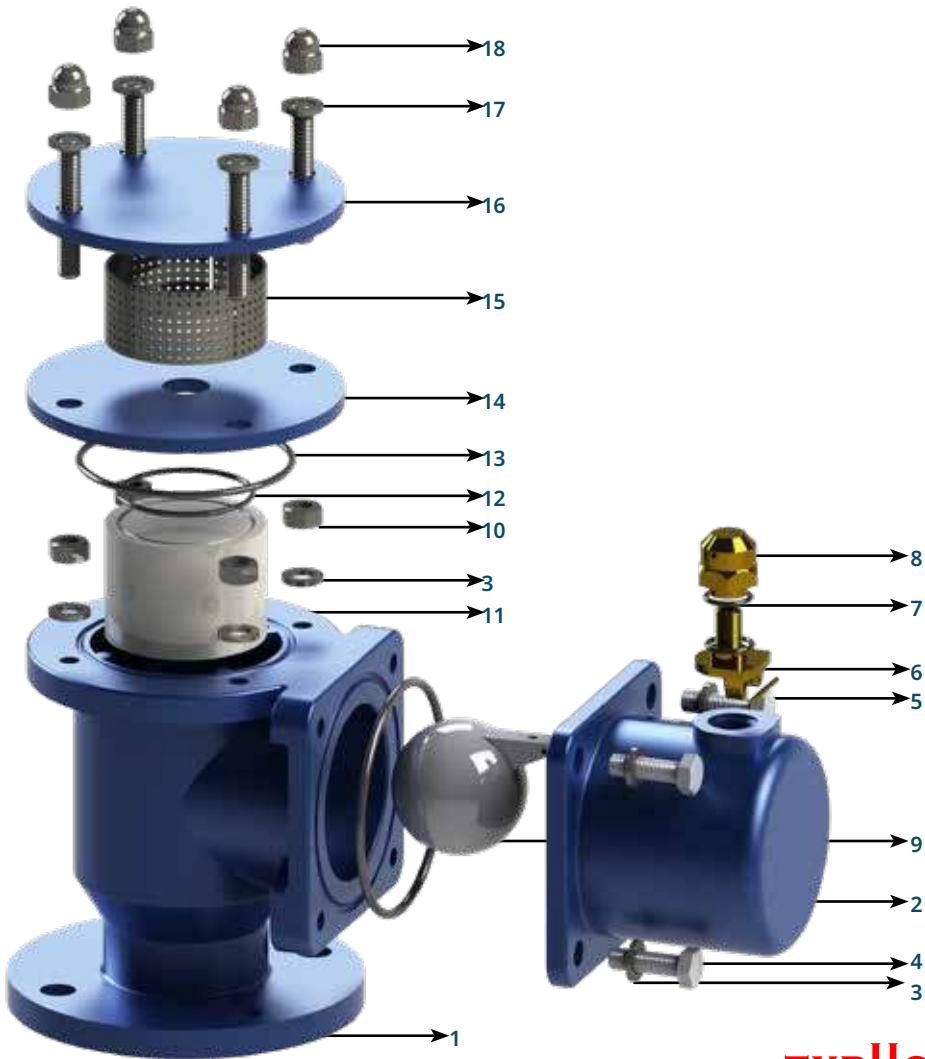


DOUBLE CHAMBER AIR RELEASE VALVES

Nominal Air Release Capacity of Non-Pulse Dynamic Air Release Valve

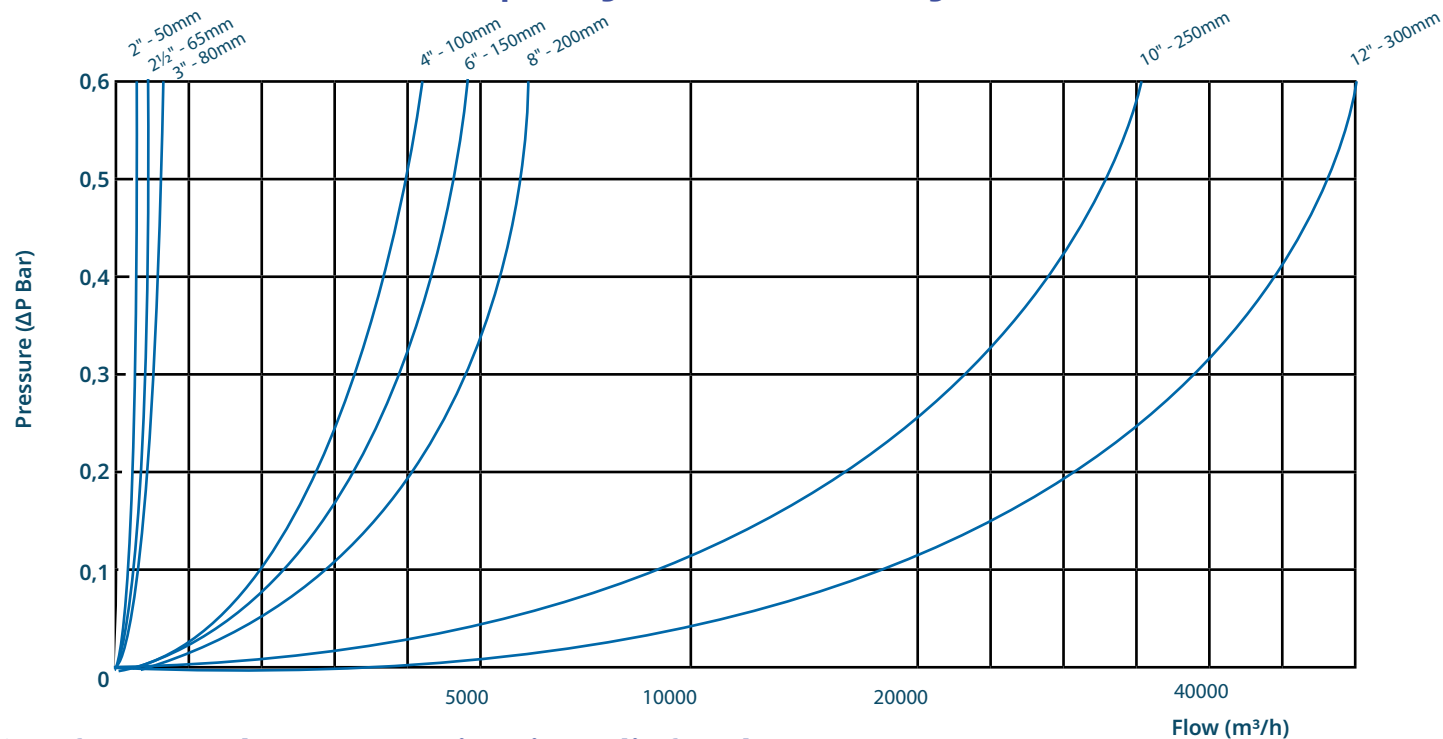



Nominal Air Intake Capacity of Non-Pulse Dynamic Air Relief Valve

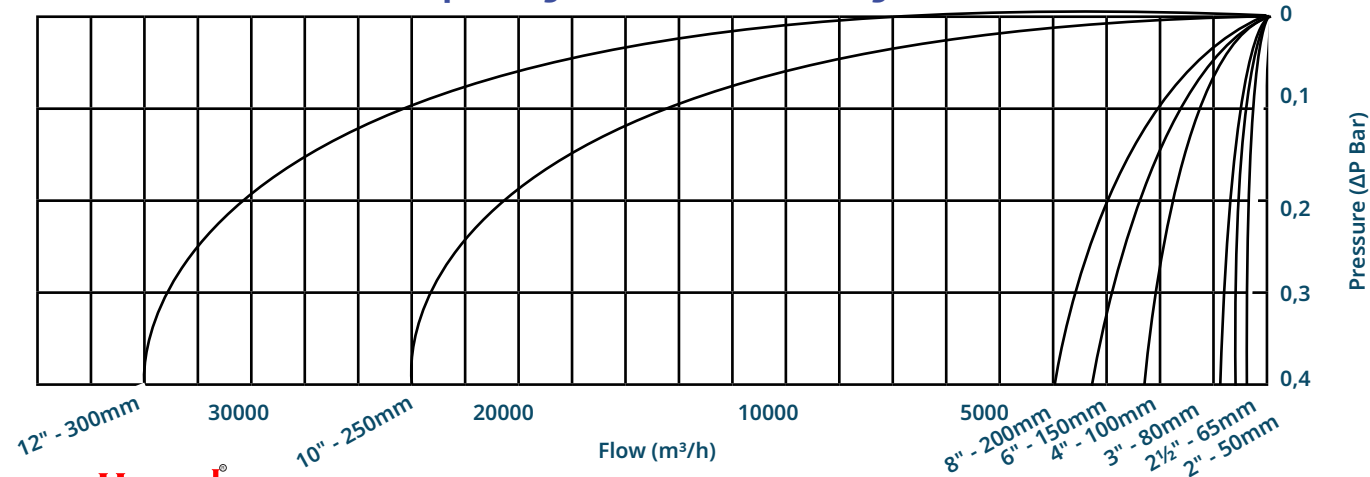

DOUBLE CHAMBER AIR RELEASE VALVES

Dimensions and Weights

DN		W		L		H		Weight	
inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
2"	50	6,496	165	11,378	289	11,06	281	31,90	14,5
2 1/2"	65	7,283	185	11,772	299	11,06	281	33,44	15,2
3"	80	7,874	200	13,150	334	13,31	338	57,64	26,2
4"	100	8,661	220	13,543	344	13,31	338	60,72	27,6
6"	150	11,220	285	16,102	409	15,20	386	83,60	38,0
8"	200	13,386	340	18,267	464	15,20	386	121,00	55,0
10"	250	15,950	405	22,440	570	26,97	685	286,60	130,0
12"	300	18,110	460	23,820	605	23,23	590	440,90	200,0

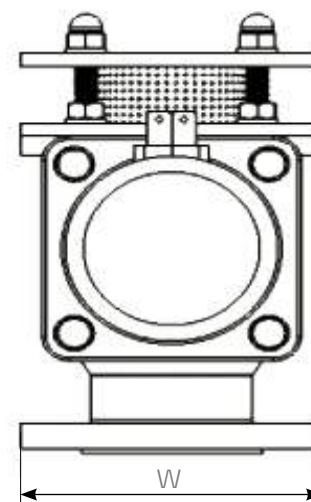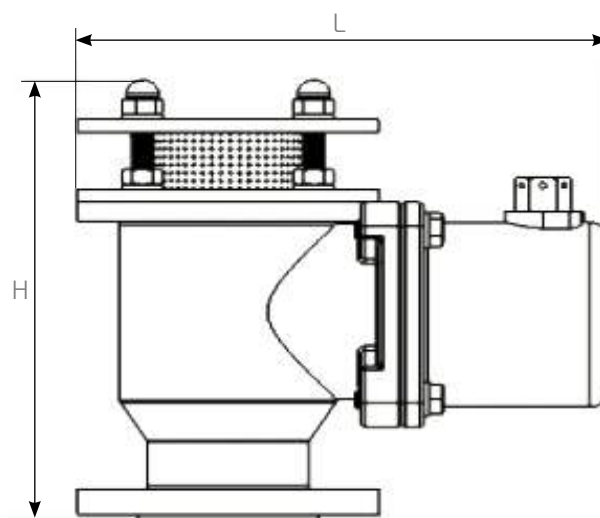

SINGLE CHAMBER KINETIC VACUUM AIR VALVES

TYPHOON Single Chamber Air Release and Vacuum Valves are designed to perform two functions:

1. The venting of large volumes of air on the start-up of the system, while pipelines are filled.
2. The intake of large volumes of air on shut-of the system, while pipelines are being drained.


Operations

1. System is turned-on by a valve opening or a pump start:
 - a. Water moves along the pipeline, pushing air.
 - b. The air is vented through the air valve.
 - c. Water flows inside the air valve, causing the float to rise and seal the outlet.
2. System is turned-off by a valve closing, pump shut-off or by an electricity failure:
 - a. Water drains and the level of water in the pipeline drops, causing vacuum inside the system.
 - b. The float drops and opens the outlet of the valve.
 - c. Air is let in the system.




SINGLE CHAMBER KINETIC VACUUM AIR VALVES

Size (inch-DN)			L		H		Weight
inch	DN	Connection	inch	mm	inch	mm	kg
2	50	Flanged	6,496	165	110,83	281,5	11
2 1/2	60	Flanged	7,283	185	11,122	282,5	12
3	80	Flanged	7,784	200	12,460	316,5	17
4	100	Flanged	8,661	220	13,327	338,5	20
6	150	Flanged	11,220	285	15,216	386,5	35
8	200	Flanged	13,386	340	15,216	386,5	46
10"	250	Flanged	17,52	445	26,97	685	120
12"	300	Flanged	20,55	522	23,23	590	190

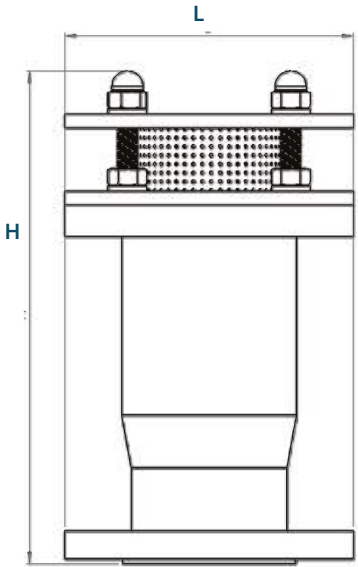

#	Material Name	Type of Material
1	Valve Body	GGG40
2	O-Ring	NBR
3	Floater	Polyethylene
4	O-Ring	NBR
5	Bottom Flange	ST37
6	Filter	Stainless Steel
7	Washer	Stainless Steel
8	Nut	Stainless Steel
9	Top Flange	ST37
10	Stud Bolt	Stainless Steel
11	Capped Nut	Stainless Steel

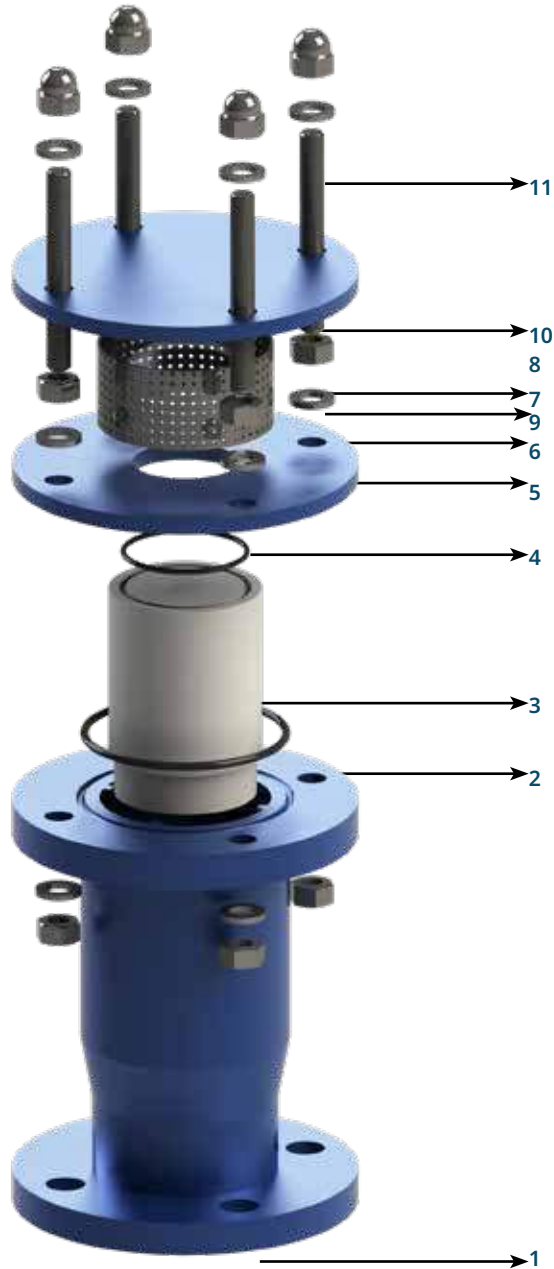

SEWAGE AIR RELEASE VALVE



During the first start-up of the system, it allows the high amount of air in the pipeline to be quickly evacuated from the system. When the water reaches the waste water suction cup sphere, the double acting plastic suction cup float attached to the sphere lifts up and closes the outlet of the suction pad. Thus, due to the compressed air trapped inside, the waste water is closed before reaching the plastic suction cup. The sealing elements of the plastic suction pad continue to fulfill their function.

During the withdrawal or evacuation of the water in the pipeline, the pressure in the line is lower than atmospheric pressure. This situation, called vacuum effect, causes collapse and cavitation damage in pipes. The float attached to the waste water suction sphere goes down and prevents this problem by providing air flow to the pipeline from outside.

When the system is in service, that is, when the pipeline is under pressure, the low amount of air is dragged with water and collects in certain parts of the line. The accumulated compressed air is evacuated together with the water and the float connected to the sphere is partially opened. After evacuation, the float rises again and closes the suction cup outlet.

Thanks to the design of the waste water suction cup, it can work smoothly in the sewer networks by preventing the problems of standard suction pads such as clogging and damage in waste water. It is long-lasting thanks to the fact that its existing parts are stainless and can be easily cleaned with the ball valve on it.

Order Information

Please provide the following information in order


Maximum mains / operating pressure bar

Main pipeline diameter mm


Valve connection type

SEWAGE AIR RELEASE VALVE

Size inch / DN	D		W1		W2		H1		H2		Weight	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
DN50	6,50	165	10,75	273	12,05	306	5,94	151	30,04	763	45,41	20,60
DN80	7,87	200	10,75	273	12,05	306	5,94	151	30,04	763	47,61	21,60
DN100	8,66	220	10,75	273	12,05	306	5,94	151	30,04	763	48,94	22,20
DN150	11,22	285	10,75	273	12,05	306	5,94	151	30,04	763	56,22	25,50
DN200	13,39	340	10,75	273	12,05	306	5,94	151	30,04	763	61,73	28,00

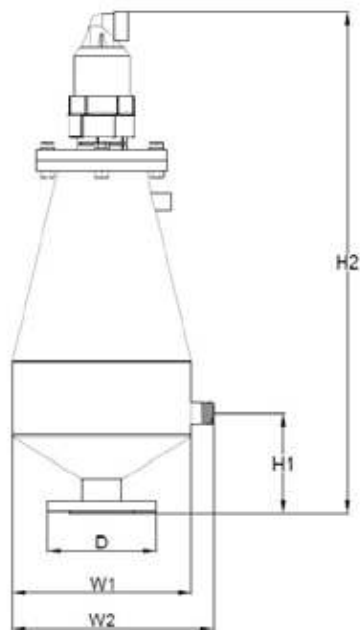


#	Material Name	Type of Material
1	Body	ST 37
2	Sewage - Air Release Valve Globe	Stainless Steel
3	Shaft	Stainless Steel
4	Nut	8.8 Coated Steel
5	Cover	ST37
6	Bolt	8.8 Coated Steel
7	Washer	8.8 Coated Steel
8	2" Double CHamber Air Valve	Plastic

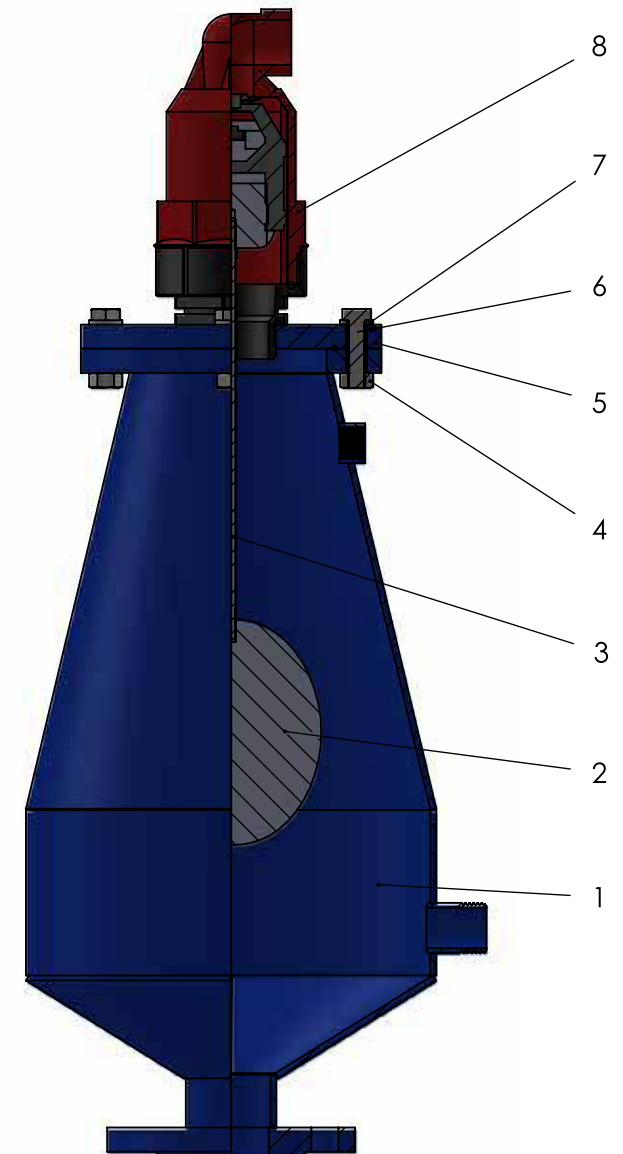

PLASTIC SEWAGE AIR RELEASE VALVE

79

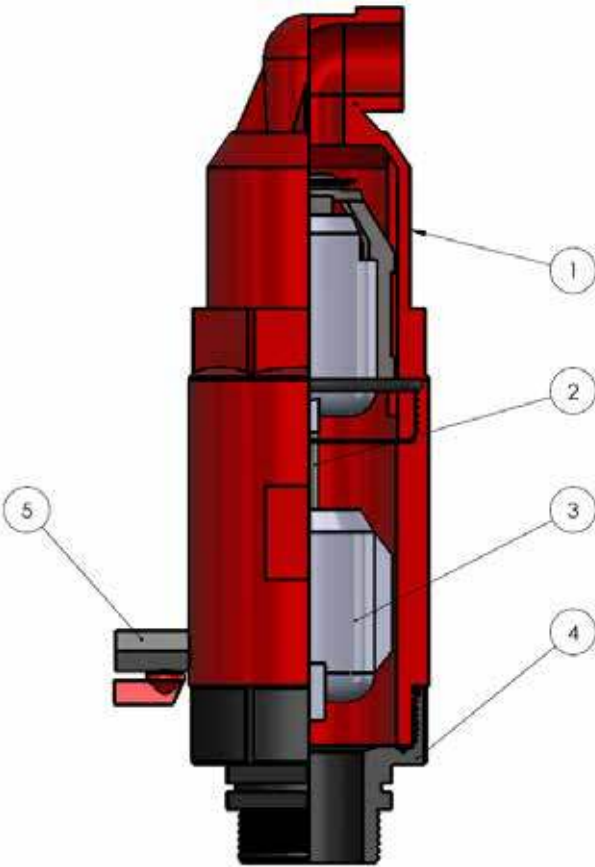

#	Material Name	Type of Material
1	Plastic Combination / Automatic Air Release Valve	Plastic
2	Mil	Stainless Steel
3	Floater	Polypropylene
4	Cover	GRP
5	Mini Ball Valve	Galvanised



Model	D (mm)		W (mm)		H (mm)	
	inch	mm	inch	mm	inch	mm
2" Combination [3 Functions]	2"	50	5,12	130	14,17	360
2" Automatic [2 Functions]	2"	50	5,12	130	9,84	250

STRAINER

YType strainer is mounted in front of pump counter control valve and sensitive devices. The main function of the valve is to hold particles such as leaves, wood, chips, pebbles in the water. These particles which can disrupt costly equipment are collected in the filter of the strainer.

If the pressure difference between the inlet and outlet manometers is high, harmful particles can be discharged by opening the drain plug.


Thanks to its Y-Type design, it has a large dirt holding capacity and low pressure loss

Nominal Size


DN50 - 65 - 80 - 100 - 150 - 200

Nominal Pressure

PN10 - 16 - 25

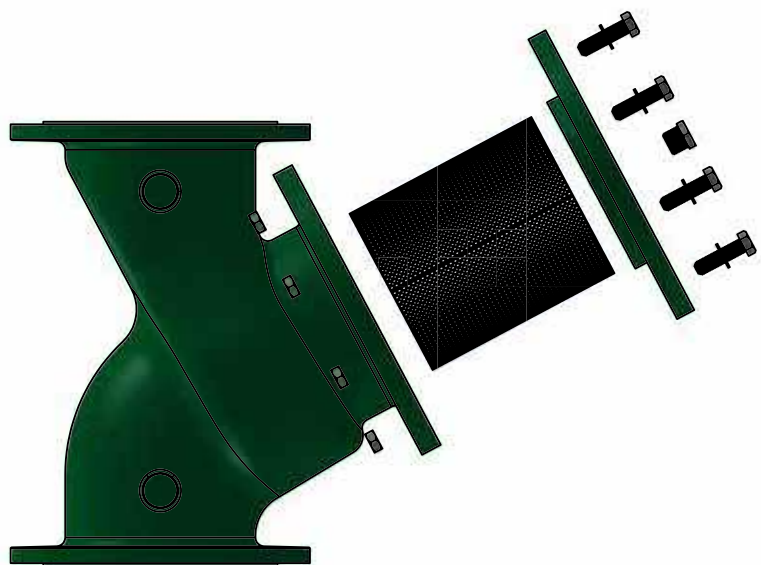

STRAINER

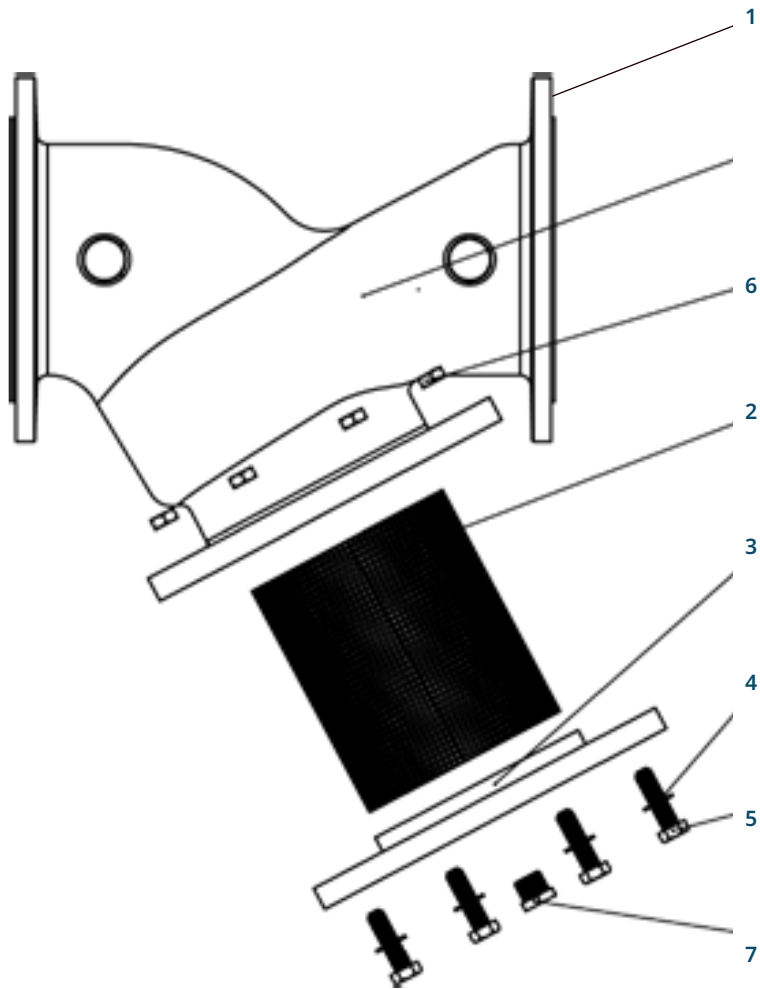

#	Material Name	Type of Material
1	Body	GGG40
2	Filter	AIS 302
3	Cover	GGG40
4	Washer	A2
5	Bolt	A2
6	Nut	A2
7	Blind cap	A2

BACK FLUSHING CONTROL VALVES

Back Flushing Control Valves are 3-way control valves that operate with line pressure or an external pneumatic pressure in filtration systems. The valve operates in the filtration and back flushing mode in coordination with the filter elements in the system. The diaphragm valve assembly of the valve works in two directions. The valve opens the evacuation path by changing the direction of the valve as it moves into the back flushing mode in the filtration mode. In this way, the cleanliness of the filter elements is best cleared by preventing contamination of clean water with dirty water in the system.

Order Information

Please provide the following information in order




Maximum flow rate m³/h

Maximum mains / operating pressure bar

Main pipeline diameter mm

Valve connection type

Models	H		B		L		Weight	
	inch	mm	inch	mm	inch	mm	lbs	kg
Victaulic 3x2	9,68	246	4,49	114	11,42	290	35,16	15,95
Victaulic 4x3	9,68	246	5,04	128	12,48	317	33,44	17,25
Flanged 3x2	9,68	246	4,49	114	11,42	290	57,64	22,45
Flanged 4x3	9,68	246	5,04	128	12,48	317	60,72	25,00
Victaulic-Threaded 2x2	7,48	190	3,54	90	7,08	180	83,6	3,80

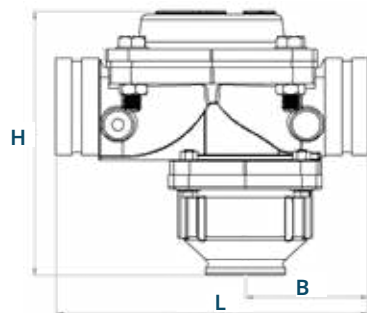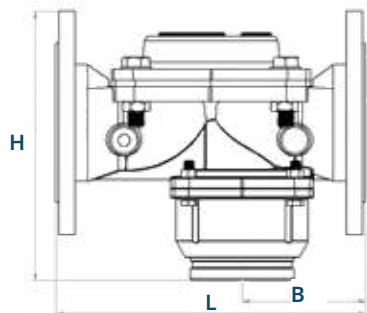

BACK FLUSHING CONTROL VALVES

Hydraulic Performance

Model		57/58	
Size		3x2	4x3
In filtration mode recommended max. stream	m³/h	90	160
	gpm	400	705
Back wash mode Recommended Max. stream	m³/h	40	90
	gpm	180	400
In filtration mode flow rate factor	Kv (metric)	130	160
	Cv (US)	150	185
Back rinse mode flow rate factor	Kv (metric)	58	70
	Cv (US)	67	81

Operating Pressure Range

Standard model: 0.7 - 10 bar / 10 - 150 psi


High-Pressure Model: 1 - 16 bar / 15 - 250 psi

Maximum operating temperature: 60°C (140°F)

Flushing Mode


Filtration Mode

—————

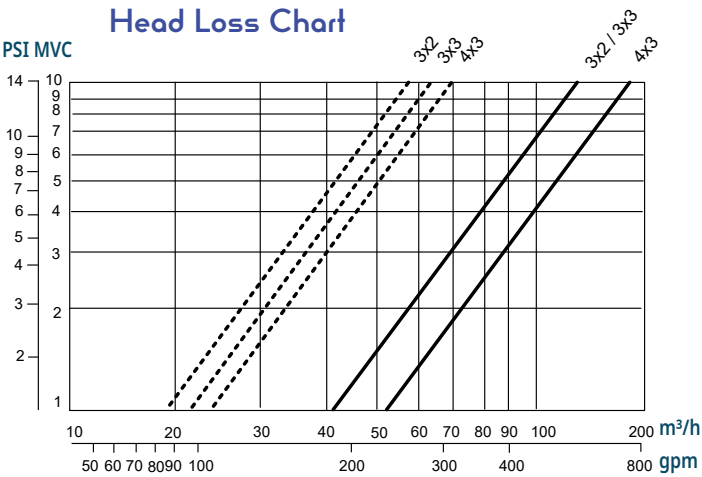


BACK FLUSHING CONTROL VALVES

#	Material Name	Type of Material
1	Bolt	8.8 Coated Steel
2	Cover	GG25 - GGG40
3	Diaphragm Wedge	Brass
4	Diaphragm	Natural Rubber
5	Body	GG25 - GGG40
6	Nut	8.8 Coated Steel
7	Nut	8.8 Coated Steel
8	Disk	HDPE
9	Rubber	EPDM
10	Washer (A)	HDPE
11	Bottom Cover	GG25-GGG40
12	Bolt	8.8 Coated Steel
13	Nut	8.8 Coated Steel
14	Washer	Brass
15	Washer	Coated Steel
16	Washer	Coated Steel
17	Shaft	Coated Steel
18	O-Ring	NBR
19	O-Ring	NBR
20	Material Adapter	HDPE
21	Rubber Container	Stainless Steel
22	Washer (B)	Stainless Steel
23	Nut	8.8 Coated Steel

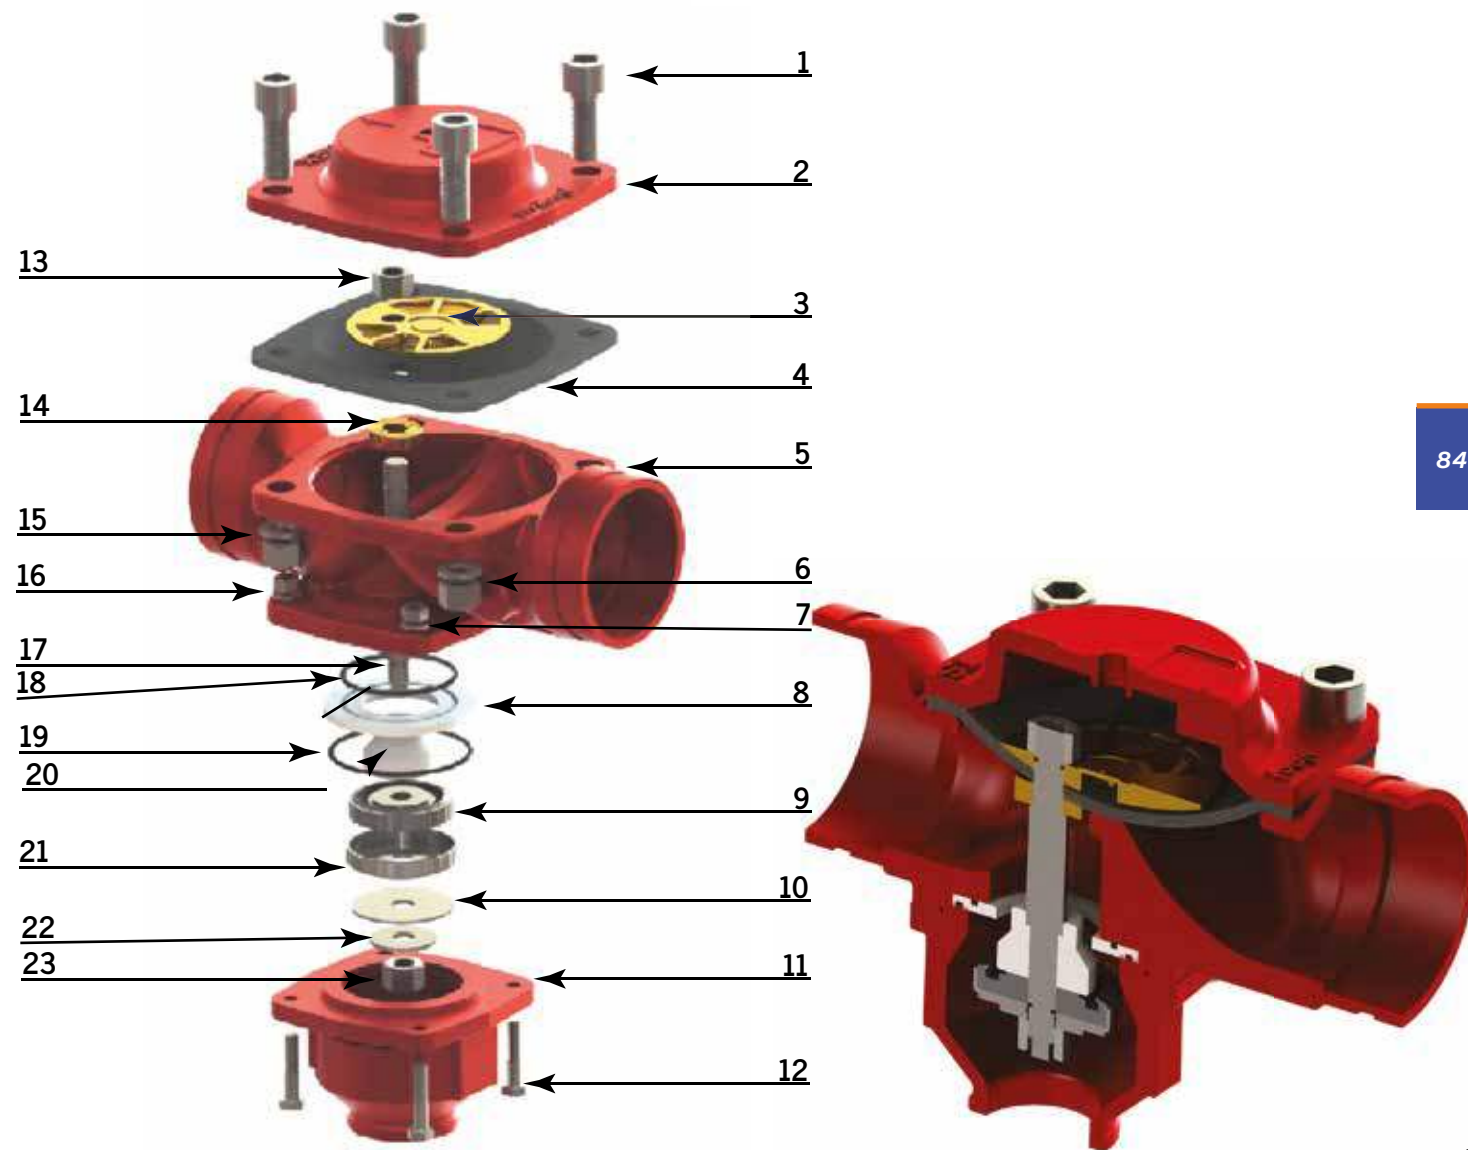

BACK FLUSHING CONTROL VALVES

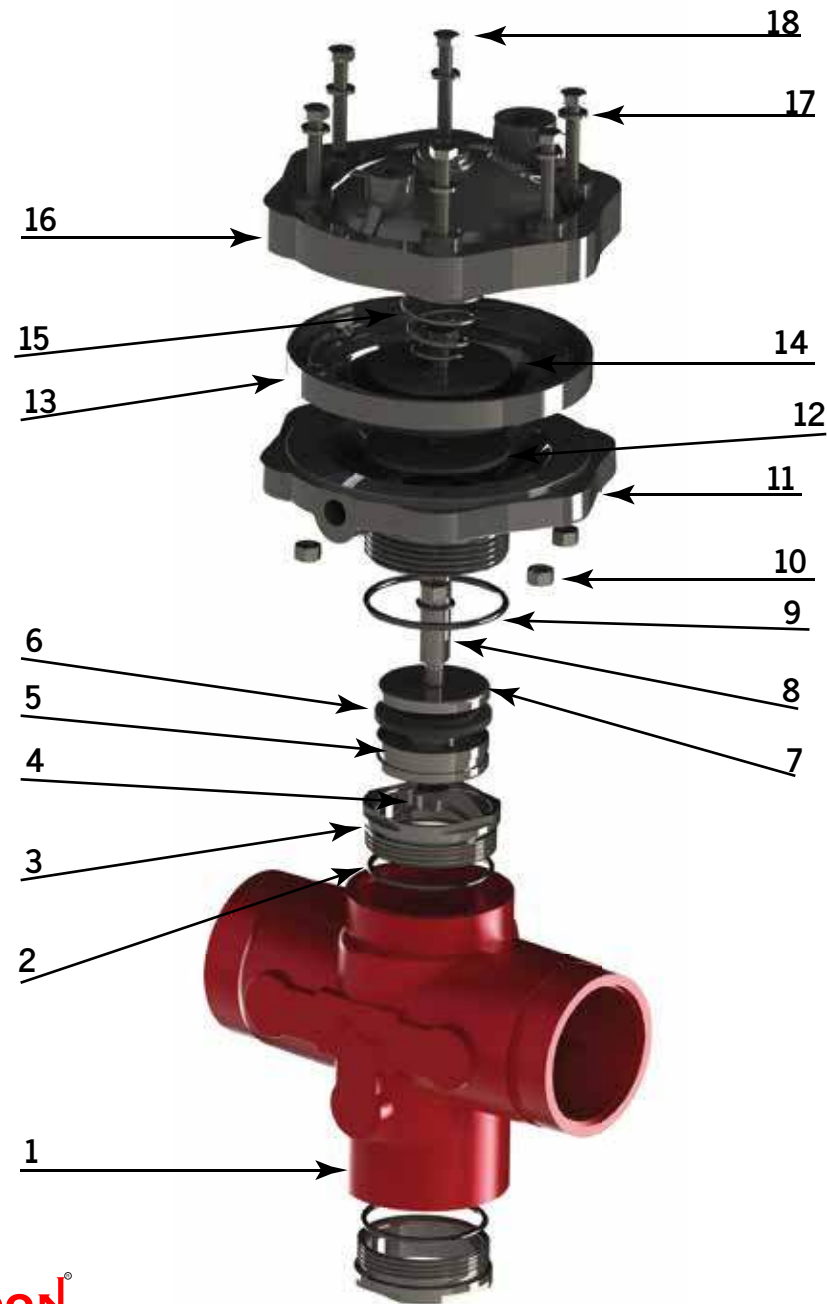

#	Material Name	Type of Material
1	Body	GGG40
2	O-Ring	NBR
3	Bearings	Stainless Steel
4	Nut	8.8 Coated Steel
5	Bottom Dish	Stainless Steel
6	Rubber	EPDM
7	Top Dish	Stainless Steel
8	Shaft	Stainless Steel
9	O-Ring	NBR
10	Nut	8.8 Coated Steel
11	Bottom Cover	Glass Reinforced polyamide
12	O-Ring	NBR
13	Diaphragm	Natural Rubber
14	Diaphragm Discs	Stainless Steel
15	Coil	Stainless Steel
16	Cover	Glass Reinforced polyamide
17	Washer	8.8 Coated Steel
18	Bolt	8.8 Coated Steel

BACK FLUSHING CONTROL VALVES


Back Flushing Control Valves are 3-way control valves that operate with line pressure or an external pneumatic pressure in filtration systems. The valve operates in the filtration and back flushing mode in coordination with the filter elements in the system. The diaphragm valve assembly of the valve works in two directions. The valve opens the evacuation path by changing the direction of the valve as it moves into the back flushing mode in the filtration mode. In this way, the cleanliness of the filter elements is best cleared by preventing contamination of clean water with dirty water in the system.

Order Information

Please provide the following information in order

- Maximum flow rate m³/h
- Maximum mains / operating pressure bar
- Main pipeline diameter mm
- Valve connection type


Head Loss Chart

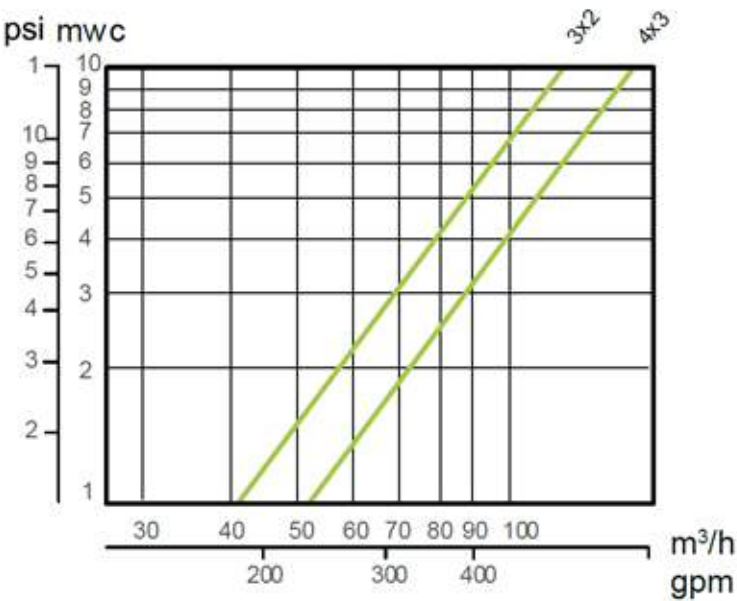

Flushing Mode -----
Filtration Mode _____


BACK FLUSHING CONTROL VALVES

Plastic

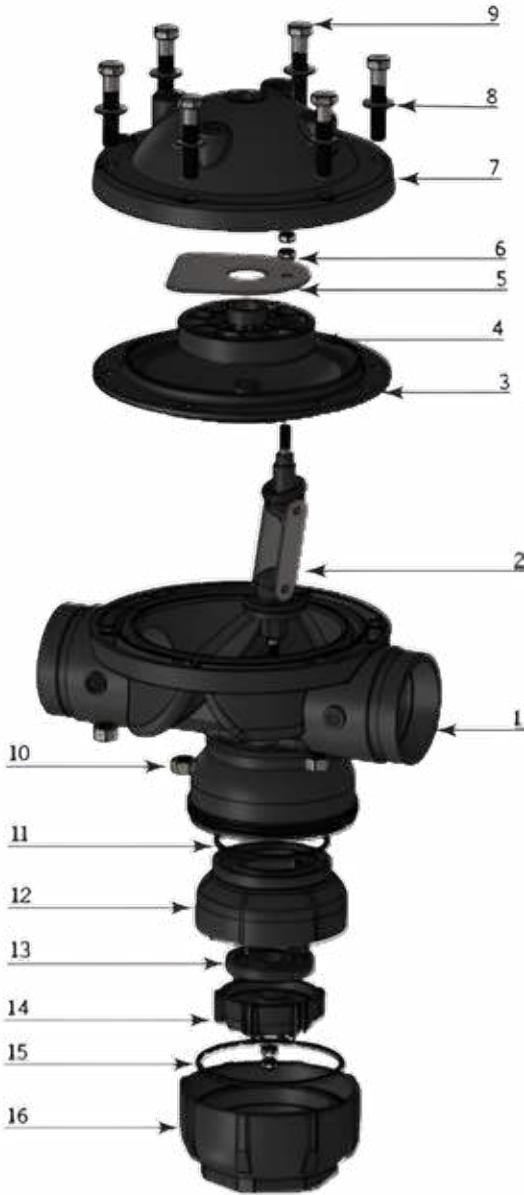


#	Material Name	Type of Material
1	Body	Glass Reinforced polyamide
2	Jolint	Stainless Steel
3	Diaphragm	Natural Rubber
4	Diaphragm Support	Glass Reinforced polyamide
5	Diaphragm Support Plate	Stainless Steel
6	Nut	8.8 Coated Steel
7	Bonnet	Glass Reinforced polyamide
8	Washer	8.8 Coated Steel
9	Bolt	8.8 Coated Steel
10	Nut	8.8 Coated Steel
11	O-Ring	NBR
12	Seat	Glass Reinforced polyamide
13	Rubber Sealing	EPDM
14	Plug	Glass Reinforced polyamide
15	O-Ring	NBR
16	Adapter	Glass Reinforced polyamide

BACK FLUSHING
CONTROL VALVES

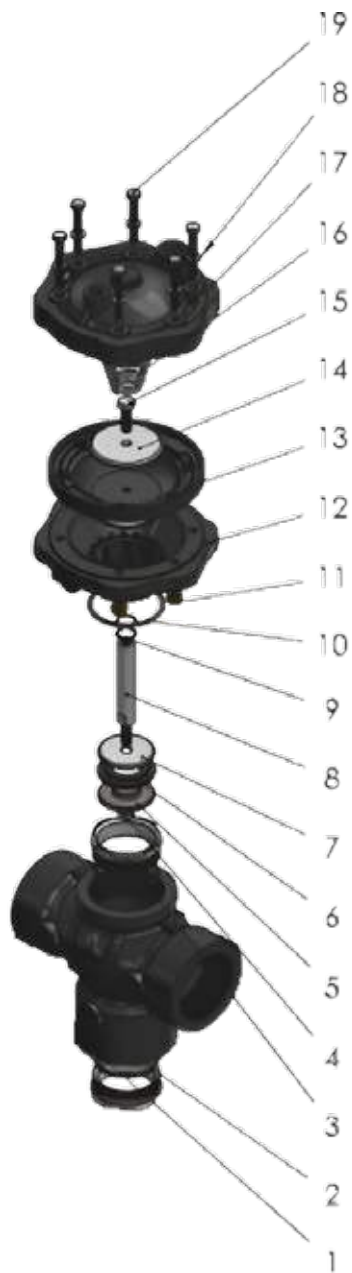


#	Material Name	Type of Material
1	Body	GRP
2	Bearing O-Ring	NBR
3	Bearing	Stainless Steel
4	Nut	Stainless Steel
5	Bottom Bowl	HDPE
6	Seal	EPDM
7	Top Bowl	HDPE
8	Shaft	Stainless Steel
9	Shaft-o-ring	NBR
10	Cover- o-ring	NBR
11	Nut	Brass
12	Bottom Cover	GRP
13	Diaphragm	Naturel Rubber
14	Dynamic Disc	Stainless Steel
15	Shaft Bolt	Stainless Steel
16	Spring	SST 302
17	Cover	GRP
18	Washer	Stainless Steel
19	Bolt	Stainless Steel

Model	H		B		L		Weight	
	inch	mm	inch	mm	inch	mm	lbs	kg
2x2 Threaded	8,15	207	3,5	89	7	178	4,41	2
2x2 Victaulic	8,15	207	5,04	128	10,07	256	4,63	2,1

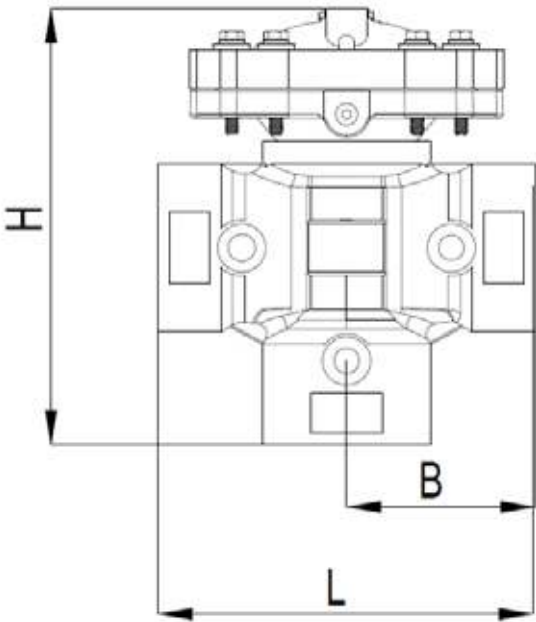

BACK FLUSHING CONTROL VALVES

Application Example

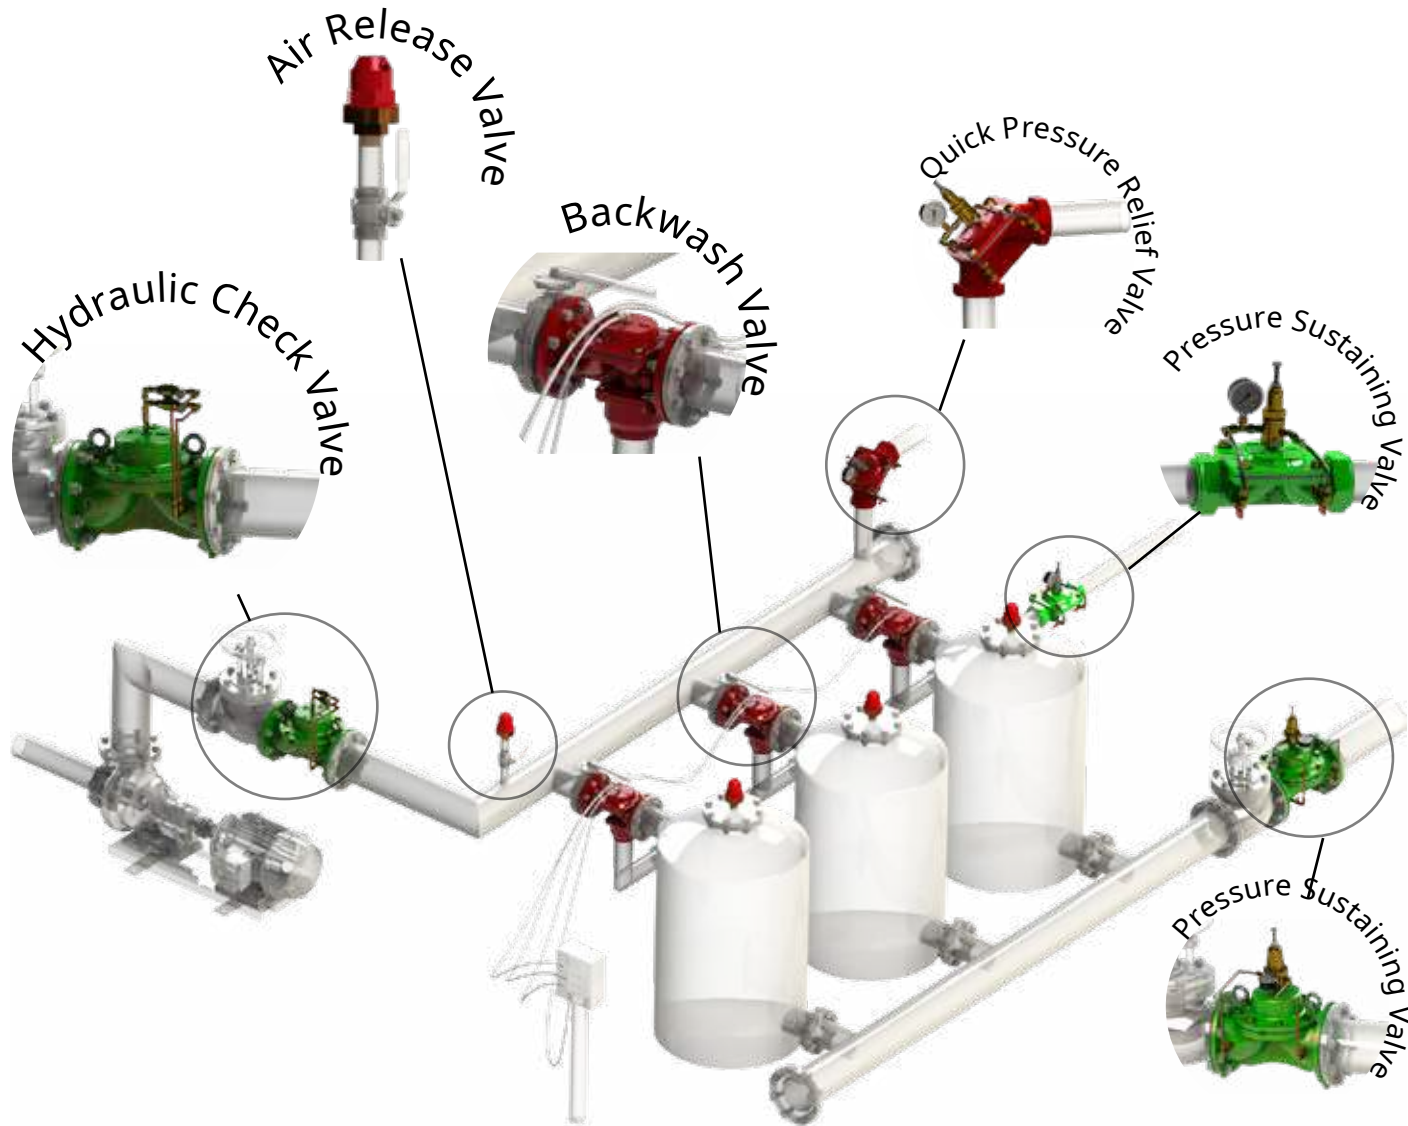

AC Type – 1-2-3 Internal With DP

- Ideal for 1, 2 and 3 station filters
- Start reverse flushing with internal DP
- Can initiate reverse rinsing by DP or time
- Simple setpoint selection with DIP switches
- Manual operation capability
- 24VAC energy input



DC Type – 1-2-3 Internal With DP

- Ideal for 1, 2 and 3 station filters
- Start reverse flushing with internal DP
- Can initiate reverse rinsing by DP or time
- Simple setpoint selection with DIP switches
- Manual operation capability
- With 9VDC and 12VDC energy input



Pressure Differential Device (DP)

- Simple pressure adjustment with DIP switcher
- 12VDC and 24VAC connection models according to the power supply
- Ability to set differential pressure range up to 2 bars
- Ability to test sensor outputs
- Alarm capability with LED indicators



AC Type – 2/10 External Without DP

- Possibility to use up to 2-10 filter stations
- Easy programming thanks to the rotating switches on the panel
- 9-12VDC LATC. with energy input
- Washing cycle from 10 minutes to 24 hours
- Washing time from 10 seconds to 24 hours
- Waiting time between stations from 5 seconds to 40 seconds
- Ability to alarm in infinite loop problems
- Manual, only DP or DP with time adjustment capability



DC Type – 2/10 External Without DP (2 Wiered)

- Possibility to use up to 2-10 filter stations
- Easy programming thanks to the rotary switches on the panel
- 9-12VDC LATC. Energized
- Wash cycle from 10 minutes to 24 hours
- Washing time from 10 seconds to 24 hours
- Stand-by time between 5 and 40 seconds
- Ability to alarm on infinite loop problems
- Manual, only DP or DP with time adjustment





#	Material Name	Description
1	Protection Board	Plastic
2	Control Panel	24VAC input / 12VDC input latch powered
3	Pressure Differential Device	24VAC input / 12VDC input latch powered
4	Nipple Adaptor	1/4" / 1/4" hose connection
5	Solenoid Valve	AC/DC powered, 1/8" female
6	T Fitting	1/8" male / 8mm hose connection
7	Elbow Fitting	1/8" male / 8mm hose connection

BACK FLUSHING CONTROL VALVES

Control Panels

93





AGRICULTURAL WOLTMAN TYPE WATER METER

- Eco-friendly, long-lasting counter
- Industrial use
- Use in agricultural fields
- Suitability for drinking water installations
- The body is GGG40 Ductile Iron Casting protected with electrostatic paint higher than 200 microns.
- MID approved and certified
- First-class materials and production technology
- Protective, durable body for outdoor and climatic conditions
- Wide and dynamic measuring range
- Accurate water flow measurement with very low pressure losses
- 2 years warranty

DN50-DN300 100lt - 1000lt With Pulse

Size	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300
L	200	200	225	250	250	300	350	450	500
H	250	260	284	296	324	354	401	459	511
D	165	185	200	220	250	285	340	405	460
G	125	145	160	180	210	240	295	355	410
nXM	4xM10	4xM10	8xM10	8xM10	8xM10	8xM10	12xM10	12xM10	12xM10
Weight (Kg)	10,7	11,8	13,3	18,5	22,4	26,8	38,2	55,8	69,0

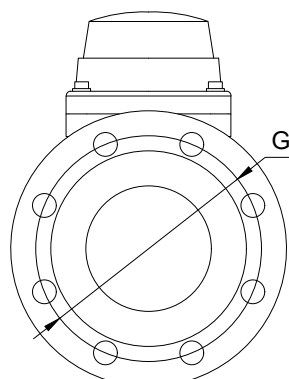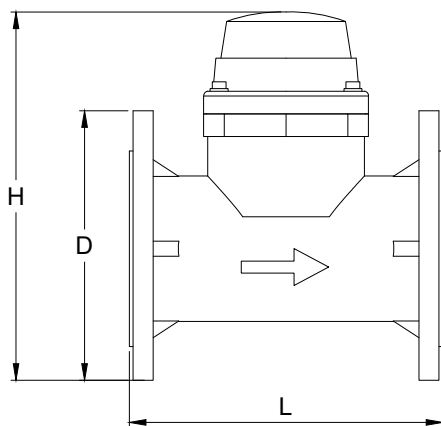

AGRICULTURAL WOLTMAN TYPE WATER METER

Technical Specifications


Nominal diameter	DN	mm	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300
	Size	inch	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
Maximum flow rate	Q4		≤78,8	≤78,8	≤125	≤200	≤313	≤500	≤788	≤1250	≤2000
Continuous flow rate	Q3		≤63	≤63	≤100	≤160	≤250	≤400	≤630	≤1000	≤1600
Pass flow	Q2		≥2,52	≥2,52	≥4,0	≥6,40	≥10	≥16,0	≥25,2	≥40,0	≥64,0
Minimum flow rate	Q1		≥1,57	≥1,57	≥2,50	≥4,00	≥6,25	≥10,00	≥15,7	≥25,0	≥40,0
Measuring range (R)	Q3 / Q1		≤40								
Transition flow rate	Q2 / Q1		1,6								
Overload flow	Q4 / Q3		1,25								
Accuracy class	-		±5%								
Acceptable error rate at low flow	(MPE _L)		Water temperature ≤ 30°C se ± %2 Water temperature > 30°C se ± %3								
Acceptable error rate at high flow	(MPE _H)		T30 & T50								
Temperature class	T		MAP16								
Water pressure class	Bar		ΔP 10								
Pressure loss class	-		ΔP 25	ΔP 10							
Reading range	m3		999,999					9,999,999			
Read device resolution	m3		0,001					0,01			
Flow profile precision class	-		U10D5								
Connection style	-		H (Horizontal)								
Horizontal length of the meter	mm		200	200	225	250	250	300	350	450	500
magnetic switch power supply	U _{max} / I _{max}		max 24V / 0,01A								
Magnetic switch K-Factor	impulse / L		0,001 & 0,0001								

AGRICULTURAL WOLTMAN TYPE WATER METER


Assembly Table

Inlet Valve Pipe Diameter (mm)	Inlet Valve Diameter (mm)	Filter Diameter (mm)	Meter Inlet Pipe Diameter (mm)	Meter Inlet Pipe Length (U) 10xDN (mm)	Meter Diameter (mm)	Meter Outlet Pipe Diameter (mm)	Meter Inlet Pipe Length (D) 5xDN (mm)	Outlet Valve Diameter (mm)
50	50	50	50	500	50	50	250	50
65	65	65	65	650	65	65	325	65
80	80	80	80	800	80	80	400	80
100	100	100	100	1000	100	100	500	100
125	125	125	125	1250	125	125	325	125
150	150	150	150	1500	150	150	750	150
200	200	200	200	2000	200	200	1000	200
250	252	250	250	2500	250	250	1250	250
300	300	300	300	3000	300	300	1500	300

Counter Application Example for 50 -300 mm

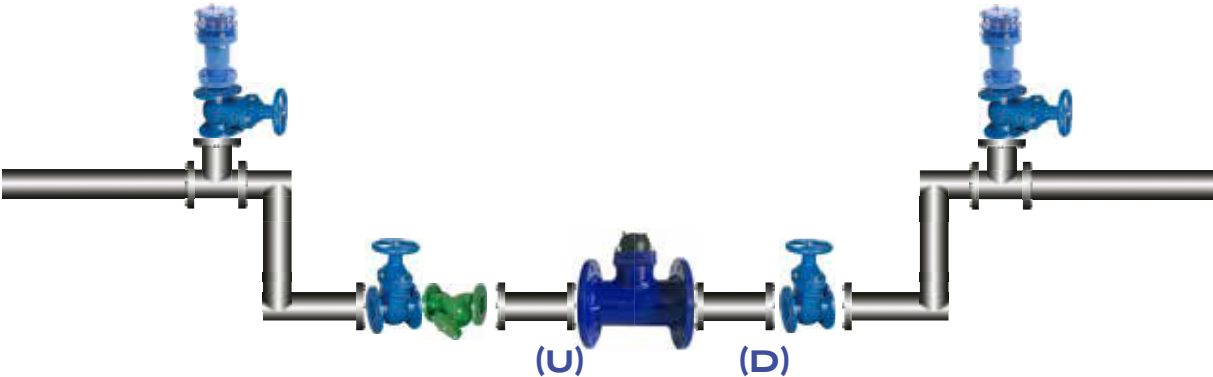


AGRICULTURAL WOLTMAN TYPE WATER METER

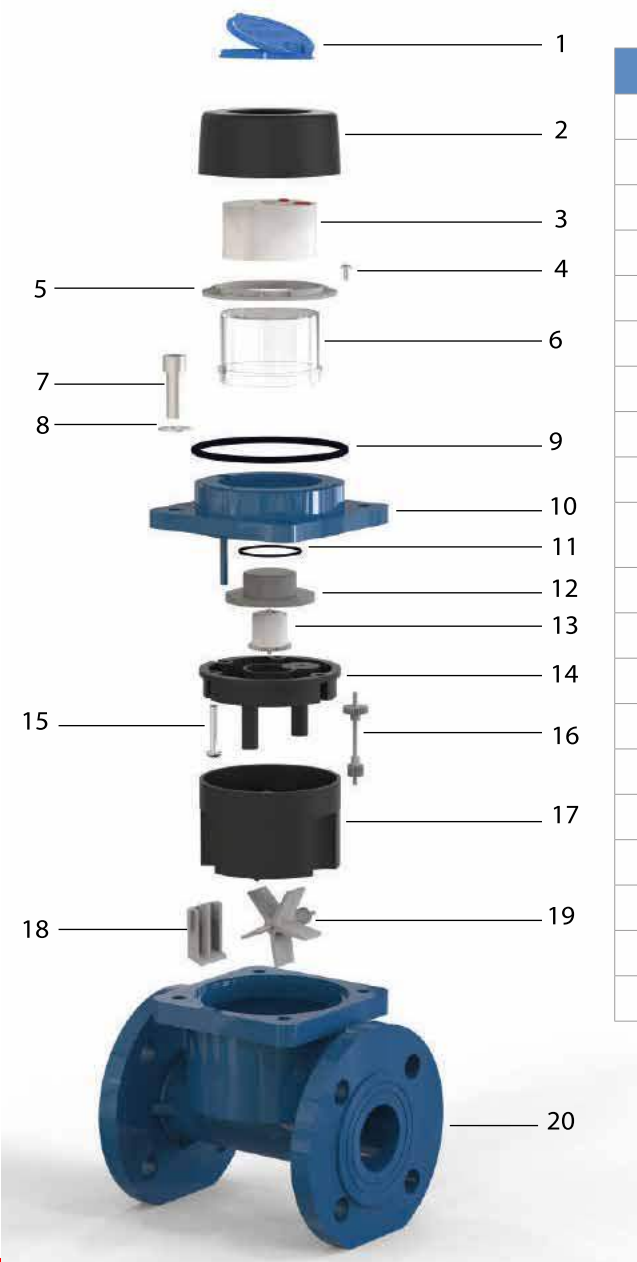

PARTS	
1	Cover
2	Retaining Ring
3	Mechanism and Indicator
4	Pivot
5	Plate
6	Glass cover
7	Screw
8	Gasket
9	O-Ring
10	Flange Cover GGG40 Ductile Iron Casting
11	O-Ring-2
12	Gear Plate
13	Gear Wheel
14	Top Support
15	Screw
16	Mechanical Transmission
17	Sub-Support
18	Regulation Spindle
19	Propeller
20	Body GGG40 Ductile Iron Casting



Error Graph

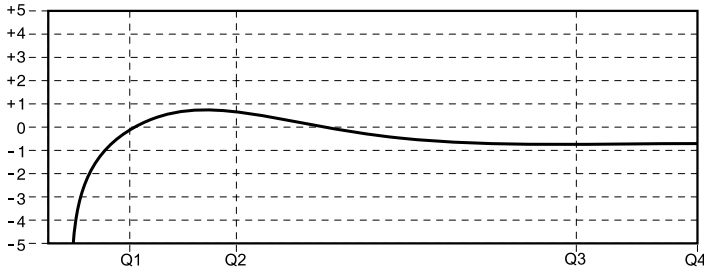



AGRICULTURAL WOLTMAN TYPE WATER METER

Plastic Body

- Eco-friendly, long-lasting counter
- Industrial use
- Use in agricultural fields
- Suitability for drinking water installations
- Le corps est en polyamide de fibre de verre renforcé composite
- MID approved and certified
- First-class materials and production technology
- Protective, durable body for outdoor and climatic conditions
- Wide and dynamic measuring range
- Accurate water flow measurement with very low pressure losses
- 2 years warranty

DN50 ve DN65 10lt With Pulse
DN80 ve DN100 100lt With Pulse

Size	DN50	DN65	DN80	DN100
L	200	200	225	250
H	250	260	284	296
D	165	185	200	220
G	125	145	160	180
nXM	4xM10	4xM10	8xM10	8xM10

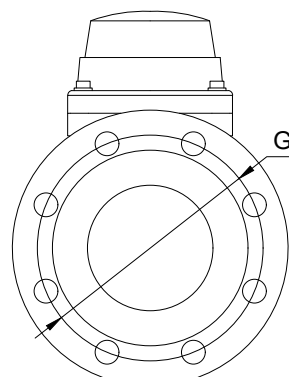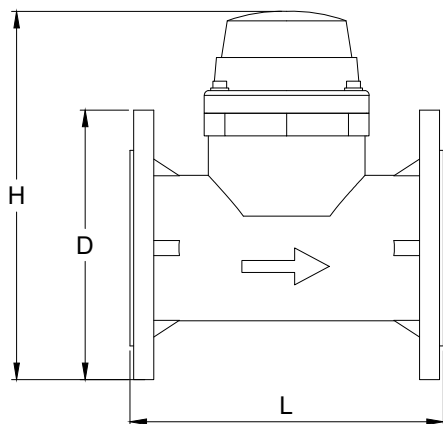

AGRICULTURAL WOLTMAN TYPE WATER METER

Plastic Body

Technical Specifications


Nominal diameter	DN	mm	DN50	DN65	DN80	DN100					
	Size	inch	2"	2 1/2"	3"	4"					
Maximum flow rate	Q4		≤78,8	≤78,8	≤125	≤200					
Continuous flow rate	Q3		≤63	≤63	≤100	≤160					
Pass flow	Q2		≥2,52	≥2,52	≥4,0	≥6,40					
Minimum flow rate	Q1		≥1,57	≥1,57	≥2,50	≥4,00					
Measuring range (R)	Q3 / Q1		≤40								
Transition flow rate	Q2 / Q1		1,6								
Overload flow	Q4 / Q3		1,25								
Accuracy class	-		±5%								
Acceptable error rate at low flow	(MPE _L)		Water temperature 30°C se ± %2 Water temperature> 30°C se ± %3								
Acceptable error rate at high flow	(MPE _H)		T30 & T50								
Temperature class	T		MAP16								
Water pressure class	Bar		ΔP 10								
Pressure loss class	-		ΔP 25	ΔP 10							
Reading range	m3		999,999				9,999,999				
Read device resolution	m3		0,001				0,01				
Flow profile precision class	-		U10D5								
Connection style	-		H (Horizontal)								
Horizontal length of the meter	mm		200	200	225	250	250	300	350	450	500
magnetic switch power supply	U _{max} / I _{max}		max 24V / 0,01A								
Magnetic switch K-Factor	impulse / L		0,001 & 0,0001								

Assembly Table

Inlet Valve Pipe Diameter (mm)	Inlet Valve Diameter (mm)	Filter Diameter (mm)	Meter Inlet Pipe Diameter (mm)	Meter Inlet Pipe Length (U) 10xDN (mm)	Meter Diameter (mm)	Meter Outlet Pipe Diameter (mm)	Meter Inlet Pipe Length (D) 5xDN (mm)	Outlet Valve Diameter (mm)
50	50	50	50	500	50	50	250	50
65	65	65	65	650	65	65	325	65
80	80	80	80	800	80	80	400	80
100	100	100	100	1000	100	100	500	100


100

Counter Application Example for 50 -100 mm

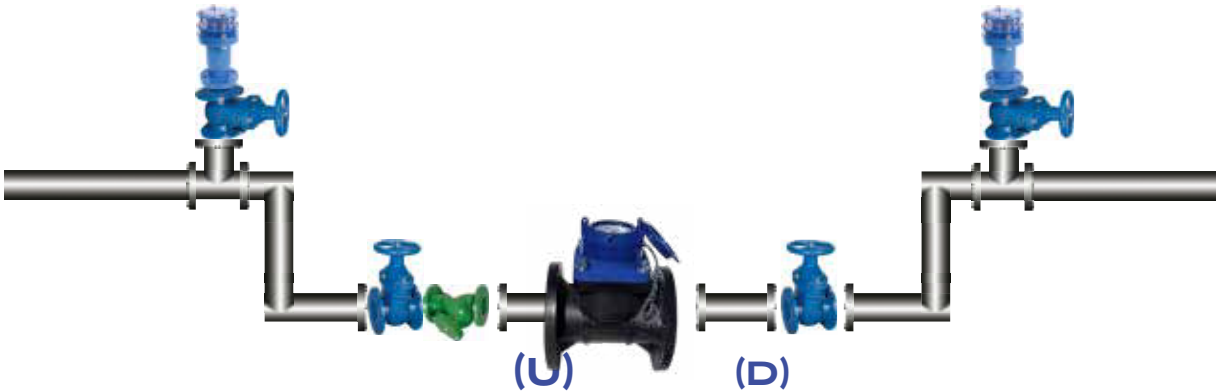

AGRICULTURAL WOLTMAN TYPE WATER METER


Plastic Body

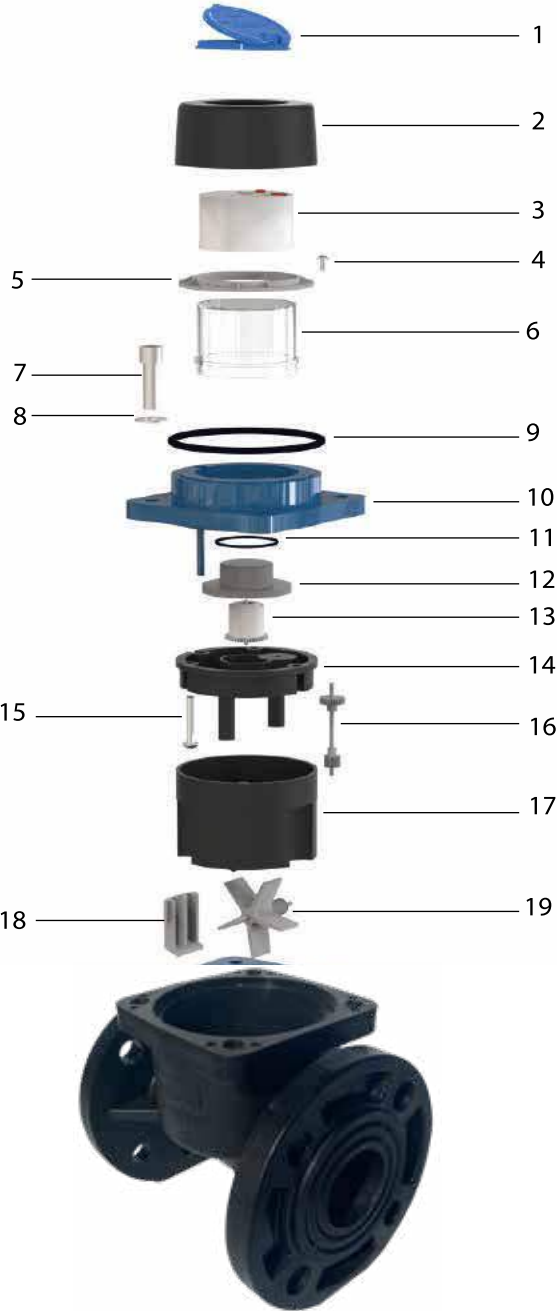

PARTS	
1	Cover
2	Retaining Ring
3	Mechanism and Indicator
4	Pivot
5	Plate
6	Glass cover
7	Screw
8	Gasket
9	O-Ring
10	Flange Cover composite reinforced glass fiber polyamide
11	O-Ring-2
12	Gear Plate
13	Gear Wheel
14	Top Support
15	Screw
16	Mechanical Transmission
17	Sub-Support
18	Regulation Spindle
19	Propeller
20	Body composite reinforced glass fiber polyamide



Error Graph

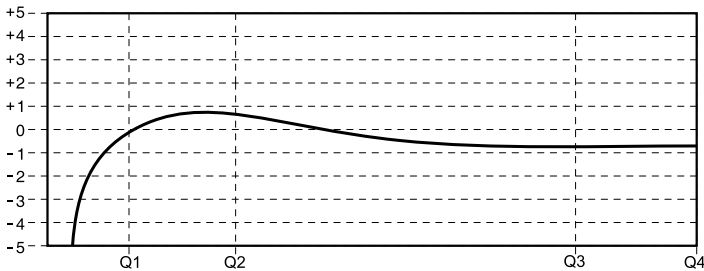



Description

It is specially designed for projects that require rapid water access. Typhoon's Quick-Coupling are engineered to endure many years of daily use and designed for maximum reliability.

On-off takes place with a quarter turn key cycle.
It has a locked cover that prevents dirt from entering the valve

Technical Specifications

Thread type

- BSP Parallel Pipe thread -NPT

Pressure Number

- PN-10
- PN-16

Sizes

- 3/4" & 1"

ACCESSORIES

Pressure Reducing Pilot



Solenoid DC Latch 3 Way



3 Way Mini Valve



1/4 Needle Valve Brass



103

Pressure Sustaining Pilot



Solenoid 3 Way 24V AC



1/4" Mini Check Valve Plastic




Finger Filter (Brass-Plastic)



Hydraulic Accelerator (Relay)



Brass Needle Valve



Plastic Needle Valve





1/4" x 8mm Male Branch TE



1/4" x 8mm Elbow



1/4" x 8mm Nipple



1/4" Nipple



8 x 8mm Nipple



1/4" x 8mm Manometer Base

1/8" x 8mm Male Branch TE



1/8" x 8mm Elbow



1/8" x 8mm Nipple



1/8" Nipple



1/8" x 1/4" Nipple



1/4" Manometer Base



Manometer Needle





EXHIBITIONS





Kemalpaşa OSB Mahallesi Kuzey Sanayi
Caddesi Dış Kapı No:13
Kemalpaşa / İzmir

+90 232 458 49 99
+90 232 458 57 67

www.tayfursu.com.tr | info@tayfursu.com.tr

TYPHOON

Her Fabrika Bir Kaledir*

H. Otatürk

*Every factory is a fortress

